



ID+ 2.5"

LED ADJUSTABLE DOWNLIGHT

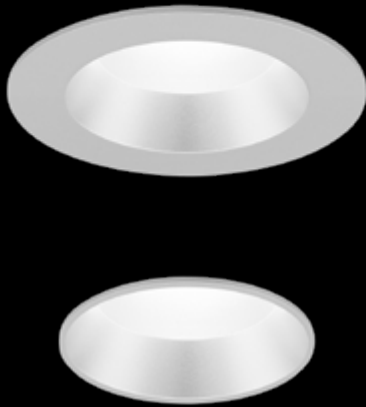


0°-15° Tilt
Spot Detail



15°-35° Tilt
Spot Detail



Clear Diffuse



Black



Warm Diffuse



White



Clear Diffuse &
White Flange





Warm Diffuse &
White Flange




Warm Diffuse &
Black Flange

DIMENSIONAL DATA



T Housing

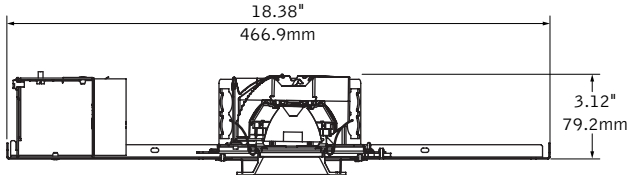


Overlap



Spot optic, no lens



Trimless



FEATURES

19° beam is ideal for art and object accenting, additional beamreads up to 75° complement any application.

Allows for aiming with locking 35° vertical tilt and 362° rotation of light module.

Overlap and trimless options.

Warm Dim: Lighting that enhances spaces with a warm glow, reminiscent of incandescent or halogen light sources.


PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Outdoor rating permits use in outdoor covered ceiling applications.

Configurations available for Title 24 JA8 High Efficacy Lighting compliance.

Available with The Naturals, a series of finishes that exude biophilic beauty.

DISTRIBUTIONS

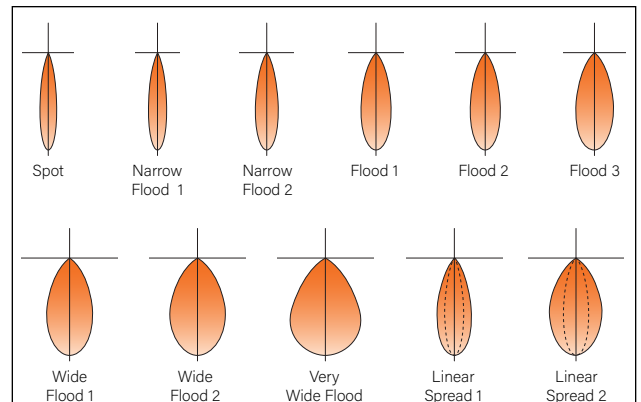


Distribution curves shown based on Round Overlap, Clear Diffuse.
Photometric performance is measured in accordance with IESNA LM-79.
Visit focalpointlights.com for complete photometric data.

fixture:

project:

HOUSING DETAILS

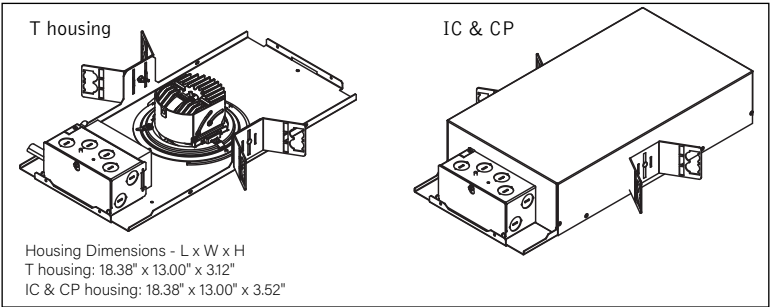

HOUSING SPECIFICATIONS

LED System

Proprietary LED module with single light emitting source. May be specified in 2700K, 3000K, 3500K or 4000K in CRI>80, CRI>90, or CRI>97. Color accuracy within 2 SDCM. Warm Dim within 3-5 SDCM. Aluminum heat sink provides appropriate thermal management.

Construction

T housing for new construction applications. Insulation to be kept 3" away from housing. Type IC inherently protected, suitable for direct contact with insulation. Butterfly brackets allow mounting to ½" emt. Order bar hangers as an accessory. Cast aluminum heat sink designed for maximum thermal dissipation. Die-formed housing and integral junction box with (7) ½" pry outs. UL & cUL listed for (8) #12 AWG (4 in, 4 out) 90°C conductors and feed through-branch wiring. Accommodates ceiling thicknesses from 0.5"-1.5" standard. For thicker ceiling consult factory. Fixture will not exceed 6lbs.

Adjustment

Manual locking 35° vertical tilt and 362° rotation of light module.

Electrical

Choice of constant current dimming drivers. Power factor > .9 typical. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Emergency Battery

Emergency output—7W for 90 minutes. Maximum mounting height: Clear Diffuse & White: 17.71ft. Black & Warm Diffuse: 17.15ft. Above ceiling access only.

Labels

UL and cUL listed. Suitable for Dry, Damp or Wet Locations indoor use only. Wet Location Solite lens options only. Specify Outdoor rated (OD) for outdoor recessed ceiling applications.

Lumen Maintenance

Reported: L70 at >55,000 hours Calculated: L70 at 204,000 hours
Reported: L90 at >55,000 hours Calculated: L90 at 59,000 hours
Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED System rated for operation in ambient environments up to 25°C. 5-year limited warranty. Fixture with Outdoor rated option must be installed in a covered ceiling and is warrantied for operation in ambient environments between -40°C to +25°C.

TRIM SPECIFICATIONS

Aesthetics

Parabolic reflector cone ensures glare free optics. Reflector is die-cast aluminum. Torsion springs pull trim tight to the ceiling with no visible fasteners within the trim. Trim is inherently air tight with Solite lens. Trims are self-flanged. Non-painted trim matches reflector finish. White or Black painted flange may also be specified. Spot distribution offered with No lens option for a crisp punch of light. No lens options feature a shroud to conceal internal components and maintain a premium aesthetic while providing a narrow spot distribution. The Naturals: 100% low VOC vinyl.

Optics

TRIM TYPE	Distribution Beam Spread										
	Spacing Criteria										
	SP	NFL1	NFL2	FL1	FL2	FL3	WFL1	WFL2	VWFL	LS1	LS2
RO	19°	21°	27°	31°	35°	45°	54°	64°	75°	22° x 40°	30° x 62°
	0.34	0.36	0.46	0.52	0.58	0.70	0.82	0.94	1.12	0.38 x 0.66	0.50 x 0.90
RT	18°	21°	26°	31°	36°	45°	54°	68°	82°	24° x 32°	28° x 68°
	0.32	0.36	0.44	0.52	0.58	0.72	0.82	0.96	1.16	0.42 x 0.52	0.48 x 0.92

PERFORMANCE CHART

See Page 4

HOUSING ORDERING

Housing Series		FLCS2
ID+ 2.5" Round Housing		
Trim Type		
Round Overlap		RO
Round Trimless		RT
Lumen Output		
500 Lumens (LT1, LD1 & LVN only)		500L
700 Lumens (Not available with LFP or LH1)		700L
900 Lumens (Not available with LFP or LH1)		900L
1100 Lumens		1100L
1300 Lumens		1300L
1500 Lumens		1500L
(Not available with LFP or LH1 with IC housing or CP option.)		
Color Temperature		
(Add 9 for 90 CRI or H for 97 CRI. Leave blank for 80 CRI.)		
2700K, 80/90/97+ CRI		_27K
3000K, 80/90/97+ CRI		_30K
3500K, 80/90/97+ CRI		_35K
4000K, 80/90/97+ CRI		_40K
Warm Dim: 2700-1800K, 90+ CRI*		92718W
Warm Dim: 3000-1800K, 90+ CRI*		93018W
*(700L Only. EMR not available. UNV & LV not available.)		
Distribution		
Spot		SP
Narrow Flood 1		NFL1
Narrow Flood 2		NFL2
Flood 1		FL1
Flood 2		FL2
Flood 3		FL3
Wide Flood 1		WFL 1
Wide Flood 2		WFL 2
Very Wide Flood		VWFL
Linear Spread Lens 1		LS1
Linear Spread Lens 2		LS2
Voltage		
UNV 120/277 Volt**		UNV
120 Volt		120
277 Volt		277
Low Voltage**		LV
**(T & TW housings: 900L max.)		
Driver		
0-10V - 0% Dimming		LZ1
0-10V - 1% Dimming		L11
0-10V - 10% Dimming		LD1
Forward Phase (120V only)		LFP
Low Voltage, PoE Compatible		LVN
(No driver, LV Voltage only. Not available with EM.)		
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming		LH1
DALI - 0% Dimming		DZ1
DALI - 1% Dimming		D11
Housing Type		
IC rated		IC
(Not available with LFP or LH1 with 1500L.)		
Non-IC		T
Non-IC Wood		TW
(RT only, requires Trimless Wood Kit.)		
Factory Options		
Bar Hangers		BH
Chicago Plenum		CP
Emergency Battery with Remote Test Switch		EMR
(T housing only. Not available with Warm Dim. Above ceiling access only.)		
Outdoor Rated		
(LD1 driver with T housing only. Solite lens optic only. Not available with CP or EMR. See dimming performance table.)		OD
Title 24 / JA8 Compliant		JA8
(Consult JA8 Reference Guide for available options.)		

TRIM ORDERING


Aperture		LCS2
2.5" Round Aperture		LCS2
Trim Type		
Round Die-Cast Overlap		RDO
Round Die-Cast Trimless		RDT
Lumen Output		
Color Temperature		
Distribution		
Optic		
Solite Lens		SL
(Not available with Spot distribution)		
Spot Optic, no lens, 0°-15° tilt (Spot distribution only)		SP00
Spot Optic, no lens, 15°-35° tilt (Spot distribution only)		SP35
Color		
(See finishes page for The Naturals options)		
Clear Diffuse		CD
Warm Diffuse		WD
Black		BK
White		WH
Optional Flange Finish		
(Overlap CD & WD finish only.) (For matching finishes leave blank.)		
Black Painted		BK
White Painted		WH
Factory Options		
Title 24 / JA8 Compliant (Trim & housing must match.)		JA8

Trim & housing must match.
See options above.

ACCESSORIES ORDERING

See Page 3

2.5" ROUND ADJUSTABLE DOWNLIGHT PERFORMANCE TABLE

Lumen Output	Delivered Lumens	System Watts	LPW
500L	500	6.4	79
700L	700	8.6	81
 700L	668	16.6	40
900L	900	10.3	87
1100L	1100	14.7	75
1300L	1300	17.3	75
1500L	1492	20.1	74


Based on SL optic, 3500K, 80CRI, Narrow Flood, Clear Diffuse. Warm Dim based on 3000 - 1800K, 90 CRI. Overlap and trimless offer identical performance. Delivered lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

OUTDOOR RATED (OD) DRIVER DIMMING PERFORMANCE TABLE

Lumen Output	Minimum Dimming Level
500L	26%
700L	18%
900L	15%
1100L	11%
1300L	10%
1500L	10%

2.5" ROUND DOWNLIGHT LUMEN MULTIPLIER TABLE

Color Temperature & CRI¹

Color Options	Lumen Output	Color Temperature & CRI	Multiplier
Standard White	All Outputs	2700K, 80+ CRI [27K]	0.92
		2700K, 90+ CRI [927K]	0.79
		2700K, 97+ CRI [9727K]	0.67
		3000K, 80+ CRI [30K]	0.98
		3000K, 90+ CRI [930K]	0.83
		3000K, 97+ CRI [9730K]	0.72
		3500K, 80+ CRI [35K]	1.00
		3500K, 90+ CRI [935K]	0.82
		3500K, 97+ CRI [9735K]	0.73
		4000K, 80+ CRI [40K]	1.01
		4000K, 90+ CRI [940K]	0.84
		4000K, 97+ CRI [9740K]	0.76
 Warm Dim	700L	2700-1800K, 90+ CRI [92718W]	0.93
		3000-1800K, 90+ CRI [93018W]	0.95

Distribution²

Trim	Distribution	Multiplier
Overlap & Trimless	Spot [SP]	1.12
	Narrow Flood 1 [NFL1]	0.95
	Narrow Flood 2 [NFL2]	0.99
	Flood 1 [FL1]	0.99
	Flood 2 [FL2]	1.00
	Flood 3 [FL3]	0.95
	Wide Flood 1 [WFL1]	0.94
	Wide Flood 2 [WFL2]	0.90
	Very Wide Flood [VWFL]	0.86
	Linear Spread 1 [LS1]	0.94
	Linear Spread 2 [LS2]	0.88

2.5" ROUND ADJUSTABLE DOWNLIGHT CBCP CHART

Lumen Output	Distribution	Beamspread	Center Beam Candlepower (CBCP)
1500L	SP	19°	10687
	NFL1	21°	7686
	NFL2	27°	5277
	FL1	31°	3994
	FL2	35°	3288
	FL3	45°	2138
	WFL1	54°	1581
	WFL2	64°	1167
	VWFL	75°	898
	LS1	22° x 40°	4146
	LS2	30° x 62°	2000

Based on Round Overlap trim (RO).

Color³

Trim	Color	Multiplier
All	Clear Diffuse [CD]	1.00
	Warm Diffuse [WD]	1.02
	White [WH]	1.05
	Black [BK]	0.99

How To Use Lumen Multipliers

Formula:
(Lumen Output Value) x (Color Temperature & CRI¹) x (Distribution²) x (Color³)


Example:
FLCS2-RO-1500L-935K-FL1-LCS4-RDO-WH
(1500) x (0.82) x (.99) x (1.05) ≈ 1279lm (estimated delivered lumens)

Multiplier charts are provided to aid with estimation of lumen levels across options. Apply multipliers against ordered Lumen Output to estimate Delivered Lumens. An estimation should make use of all tables through consecutive application of three multipliers. Refer to IES files for most accurate photometric information.

Finishes



STANDARD FINISHES

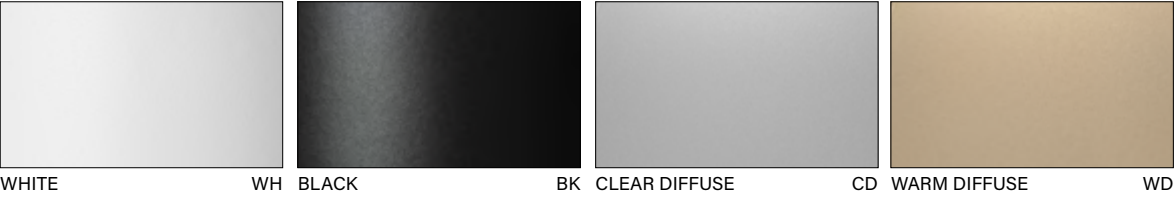

THE NATURALS (25% SCALE)

