

# **D+** 3.5" ADJUSTABLE

©2018 Focal Point, LLC. 4141 S Pulaski Road, Chicago, IL 60632 I T 773.247.9494 I www.focalpointlights.com All rights reserved. "Focal Point", "Bringing It All Together", "ID+", "ChromaSure" and the light-ray graphic are trademarks or registered trademarks of Focal Point, LLC. Visit www.focalpointlights.com for specification and other details on our entire catalog. FOCAL POINT

Bringing It All To Light™

7/18 MKT#1129

# SMALL, POWERFUL, FLEXIBLE

Designed to provide a cost-effective solution for residential and commercial spaces, the ID+ 3.5" Adjustable Accent features a low-profile housing, ideal for shallow plenum spaces. As a companion to the downlight and wall wash, it offers a host of lumen outputs, beam spreads and trim finishes, making it the ideal solution for virtually any architectural application. It is the perfect complement to a family of petite luminaires packed with big options!

## **PUNCH OF POWER**

The superior optical design offers crisp light distribution. Packed with power, the ID+ 3.5" Adjustable Accent has a center beam candlepower (CBCP) up to 12,360 candelas, the highest in the industry for its petite size.







3.5" Adjustable Accent

# RL RIGHT LIGHT.

Right Light<sup>™</sup> provides a broad range of standard delivered lumen outputs that stay consistent as technology upgrades occur. In addition, tunable drivers allow for custom wattage and lumen outputs to be specified within the standard range

# Chroma**Sure**


ChromaSure<sup>™</sup> products utilize a consistent phosphor mix resulting in a 2-step MacAdam ellipse across the entire product portfolio.

### **COMPANION 3.5" PRODUCTS**



**Downlight** 

Wall Wash

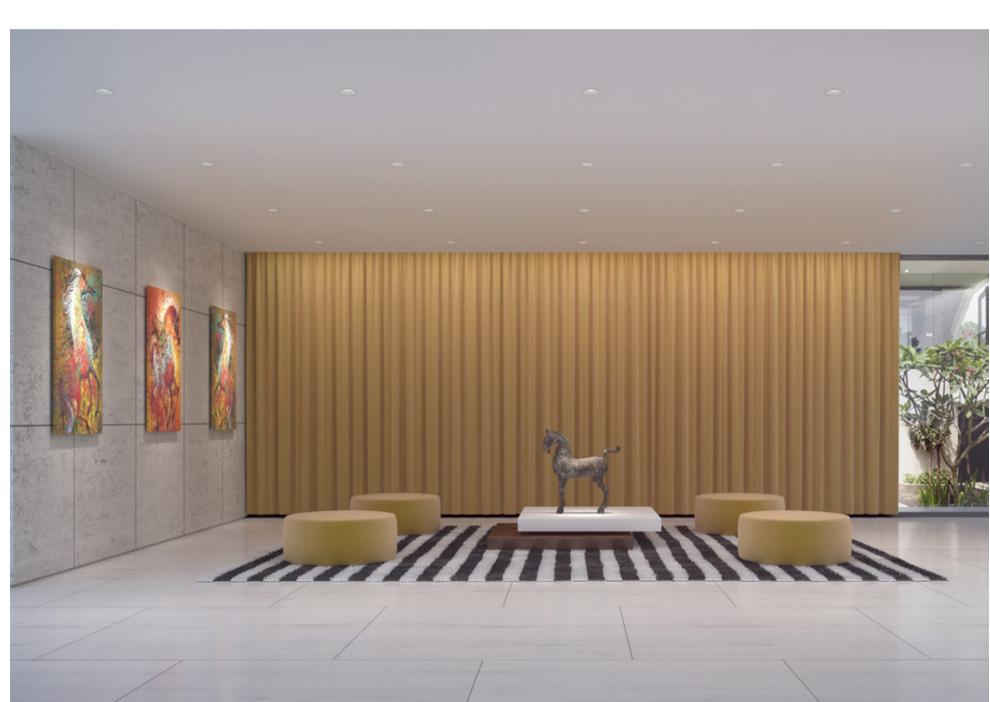



### FIELD CHANGEABLE OPTICS

A twist & lock mechanism allows to easily change the beam spread optics post-installation; spot, narrow flood, flood and linear spread are field changeable.





Narrow Flood, Flood & Linear Spread Lens utilize smaller optic

#### Spot utilizes larger optic

24

## **TOOL-LESS ADJUSTABILITY**

Allows for ease of installation and accommodates design changes in the field.

362° ROTATION

Precise aiming and orientation is achieved by a simple rotation of the light module, accommodating diverse and changing field requirements.



0° - 35° TILT

A simple adjustment handle is used to position and aim the beam. Degree markers offer a visual confirmation for consistency throughout a space.

### **ID+3.5" ADJUSTABLE ACCENT OPTIONS**





Trimless




Overlap

Clear Diffuse Warm Diffuse



# **SQUARE TRIM ALIGNMENT**

A built-in adjustment feature ensures trims are perfectly aligned.



# **ID+3.5" PERFORMANCE**

