



ID+ 3.5" Adjustable Accent BEAM SPREAD GUIDE


30° AIMING ANGLE BEAM PATTERNS




Spot without Solite Lens (SP) - 15°
Clear Diffuse Reflector (CD)



Spot with Solite Lens (SPA) - 18°
Clear Diffuse Reflector (CD)

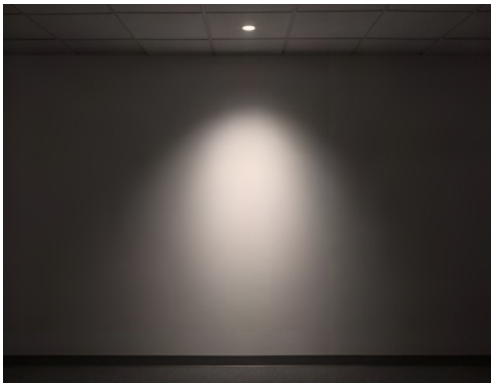

Narrow Flood (NFL) - 25°
Clear Diffuse Reflector (CD)

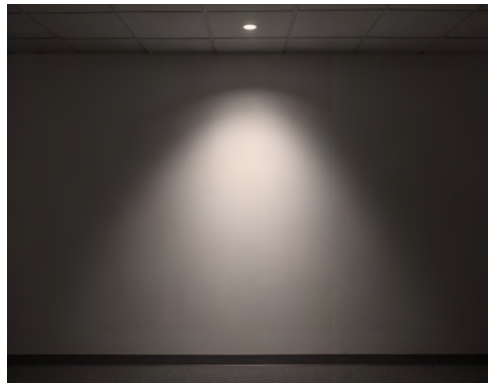


Flood (FL) - 40°
Clear Diffuse Reflector (CD)

PERFORMANCE AT 0°

Distribution	Delivered Lumens	System Watts	Lumen Per Watt (LPW)	Center Beam Candlepower (CBCP)
Spot with Solite Lens (SPA)	700	9	77	6,454
	900	12	77	8,274
	1100	16	69	10,168
	1300	19	71	12,360

*Lumen output may vary +/- 5%. 3500K Color Temperature.

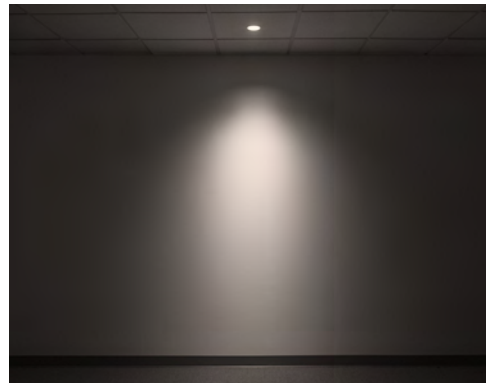

Linear Spread (LS) - Vertical - 15° x 30°
Clear Diffuse Reflector (CD)



Linear Spread (LS) - Horizontal - 30° x 15°
Clear Diffuse Reflector (CD)



ID+ 3.5" Adjustable Accent BEAM SPREAD GUIDE

30° AIMING ANGLE BEAM PATTERNS




Spot without Solite Lens (SP) - 15°
Clear Diffuse Reflector (CD)



Spot with Solite Lens (SPA) - 18°
Clear Diffuse Reflector (CD)



Narrow Flood (NFL) - 25°
Clear Diffuse Reflector (CD)

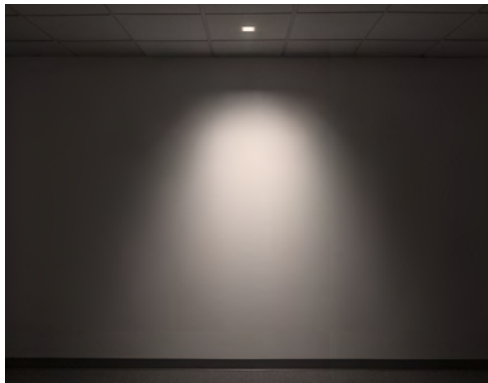


Flood (FL) - 45°
Clear Diffuse Reflector (CD)

PERFORMANCE AT 0°

Distribution	Delivered Lumens	System Watts	Lumen Per Watt (LPW)	Center Beam Candlepower (CBCP)
Spot with Solite Lens (SPA)	700	11	65	6,139
	900	14	66	7,641
	1100	19	56	9,243

*Lumen output may vary +/- 5%. 3500K Color Temperature.

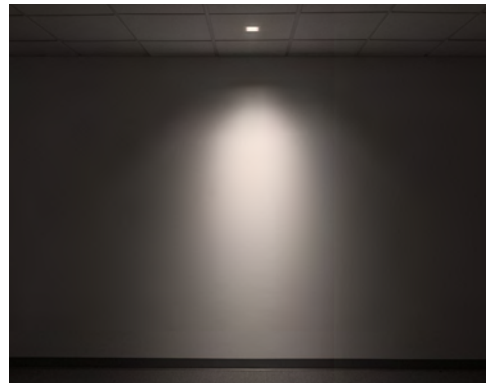

Linear Spread (LS) - Vertical - 15° x 30°
Clear Diffuse Reflector (CD)



Linear Spread (LS) - Horizontal - 30° x 15°
Clear Diffuse Reflector (CD)