

# id+ 4.5" square adjustable

FLCS44 | LCS44




FOCAL POINT™


**! LUMINAIRE MUST BE INSTALLED PRIOR TO DRYWALL CEILING. ALL GRID LUMINAIRES MUST BE SECURED TO STRUCTURE ABOVE. !**

## FOCAL POINT


NON-EMERGENCY - T RATED



EMERGENCY - REMOTE TEST SWITCH

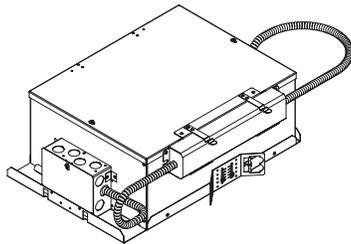


## PARTS



BEAMSPREAD OPTIC  
(SHIPPED INSTALLED)

OPTIONAL - BAR HANGERS SOLD SEPARATELY

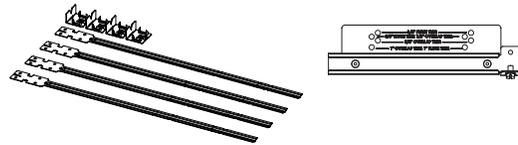

## KEY



POWER OFF



ATTENTION



POWER ON




LEVEL




SEE ADDITIONAL INSTRUCTIONS

## TRIM




ADJUSTABLE ACCENT



DOWNLIGHT




REGRESS CLEAR/  
SOLITE LENS

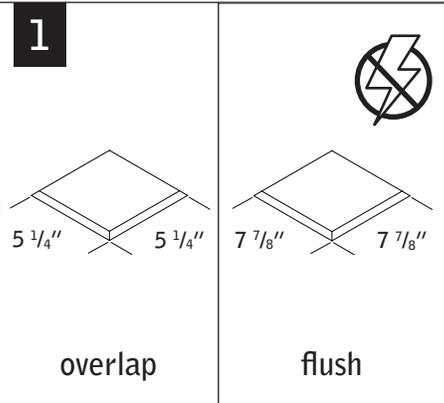


## GRID

2 x2

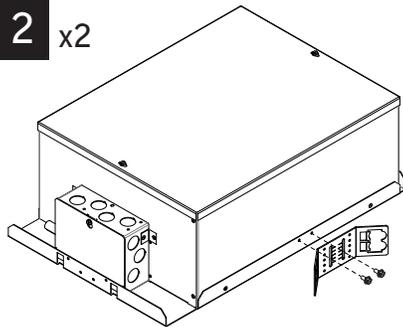


## GRID - 1/2" CONDUIT & CLIP (BY OTHERS)

3 x2

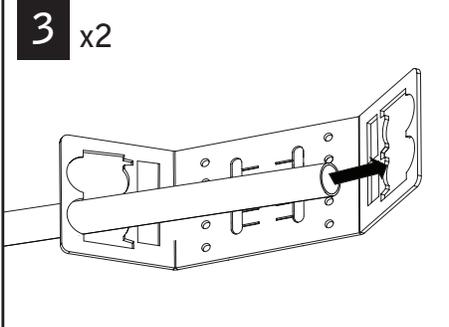


4 x4

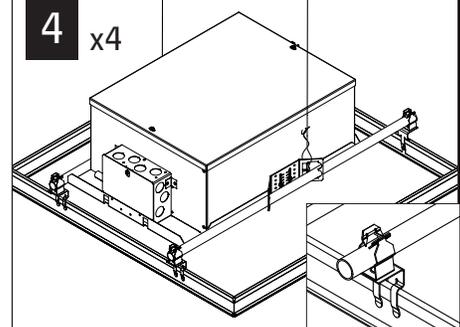


## GRID - BAR HANGERS (SOLD SEPARATELY)


3 x2

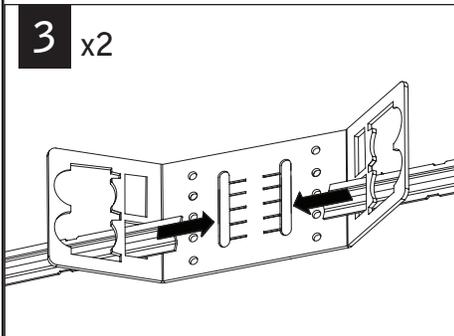

4a x4

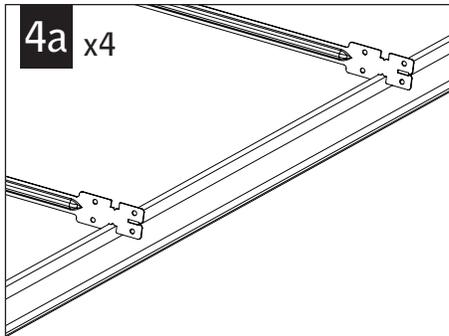

4b multiple luminaires only

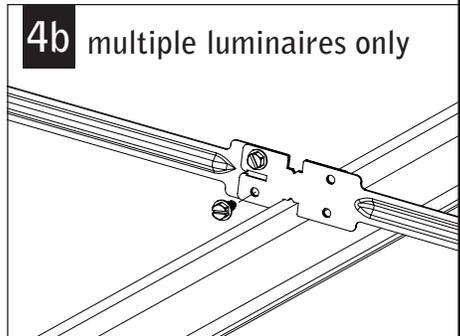


Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).  
To prevent electrical shock, disconnect electrical supply before installation or servicing.

# DRYWALL - BAR HANGERS (SOLD SEPARATELY)


2a




SELECT CEILING THICKNESS/TRIM TYPE

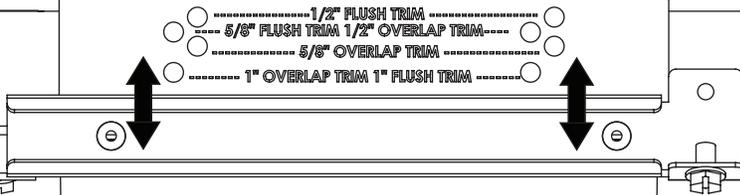

2b X4

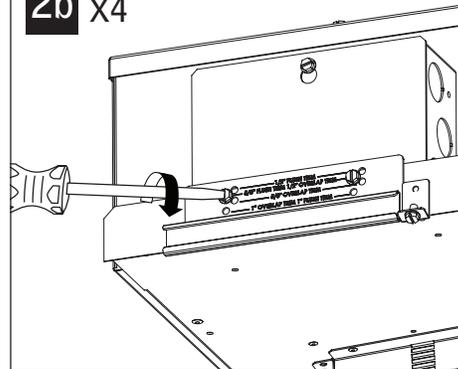


3 X2

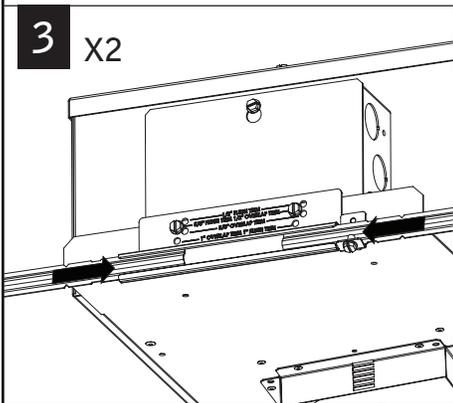


## WOOD STUDS

4a X4

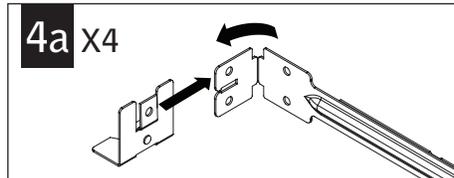


4b

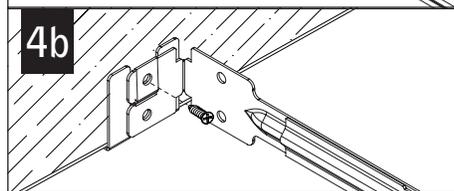


## METAL STUDS

4

X4

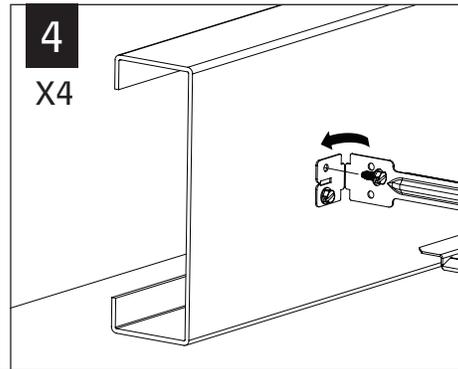


5

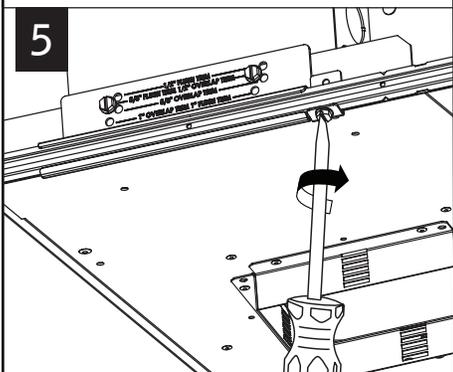


TIGHTEN SCREW TO SECURE BAR HANGER IN PLACE

6

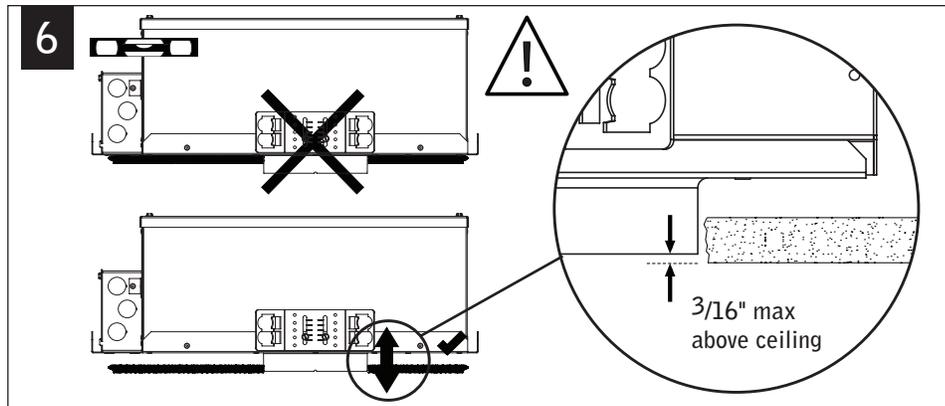


7

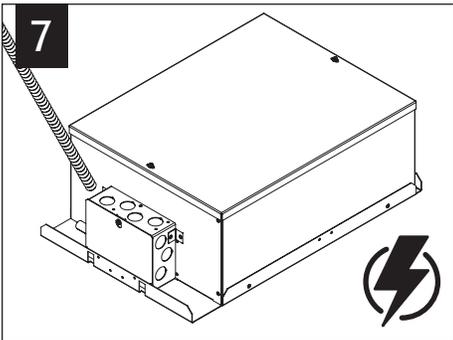


MAKE ELECTRICAL CONNECTIONS

## FLUSH TRIM MUD-IN

1



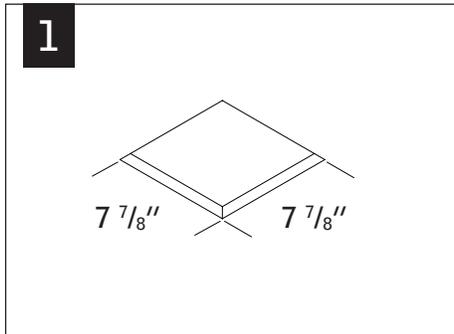


2

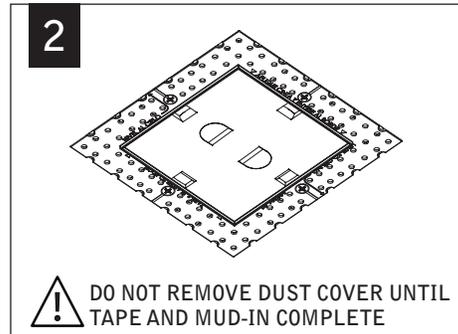

DO NOT REMOVE DUST COVER UNTIL TAPE AND MUD-IN COMPLETE

Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation). To prevent electrical shock, disconnect electrical supply before installation or servicing.

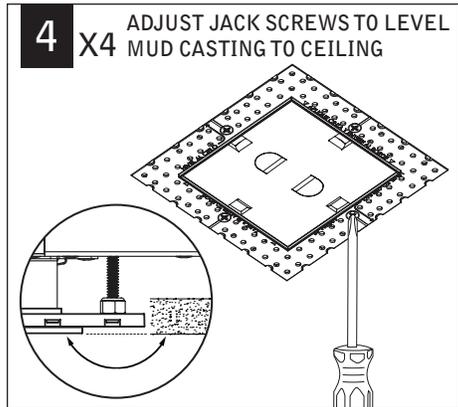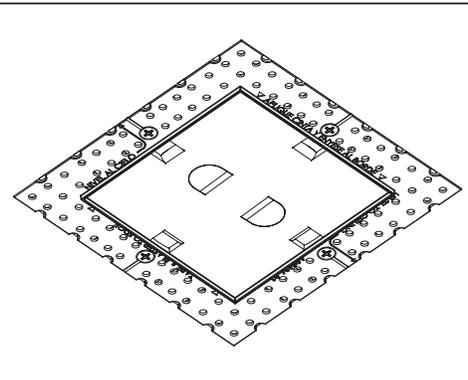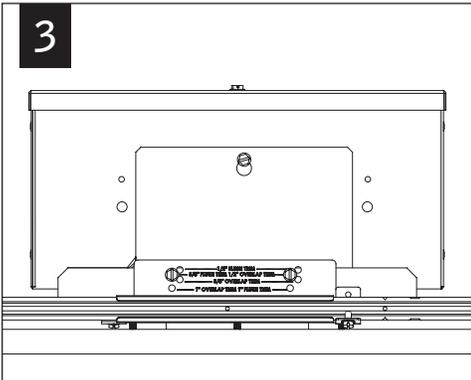

MUD CASTING WILL BE SLIGHTLY RECESSED WHEN BAR HANGERS ARE PROPERLY POSITIONED.

**EMERGENCY - MOUNTING HEIGHT**

**I**

SEE BATTERY MANUFACTURER INSTRUCTIONS

EMERGENCY MAXIMUM MOUNTING HEIGHT:  
20.00'

**EMERGENCY - INTEGRAL TEST SWITCH ⚠ ABOVE CEILING ACCESS REQUIRED ⚠**

**A**

BATTERY UNIT CONNECTOR INSIDE

**B**

**I**

SEE BATTERY MANUFACTURER INSTRUCTIONS

**!**

DO NOT MATE CONNECTOR UNTIL INSTALLATION IS COMPLETE AND A.C. POWER IS SUPPLIED

**EMERGENCY - REMOTE TEST SWITCH ⚠ ABOVE CEILING ACCESS REQUIRED ⚠**




**A**

RELEASE TEST SWITCH FROM BRACKET PRIOR TO INSTALLATION




**B**

**C**




Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation). To prevent electrical shock, disconnect electrical supply before installation or servicing.

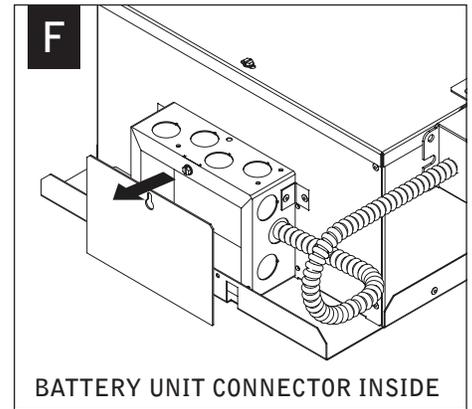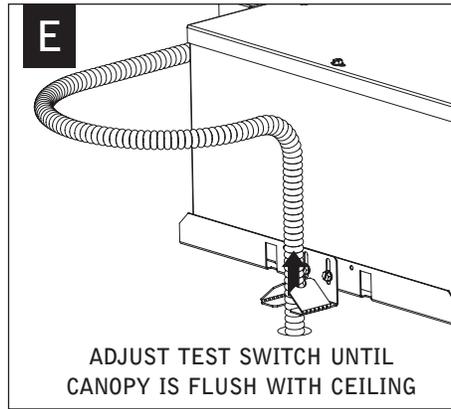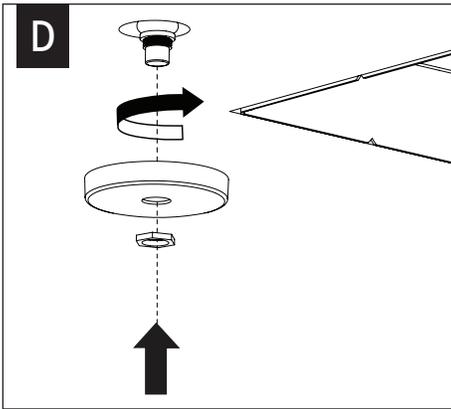



**TILT**

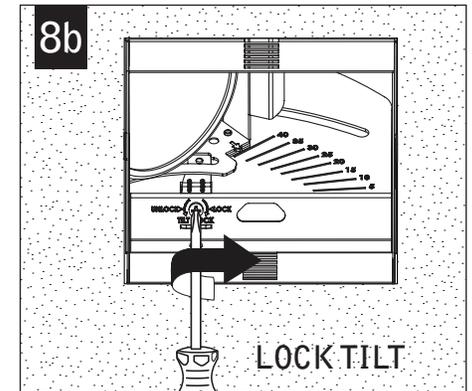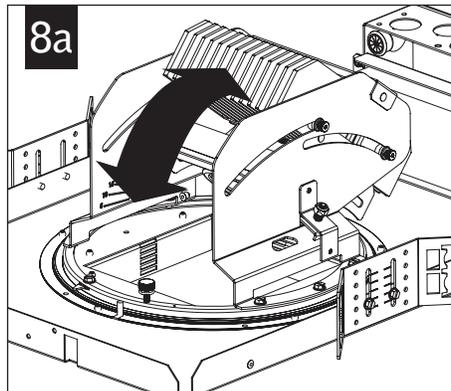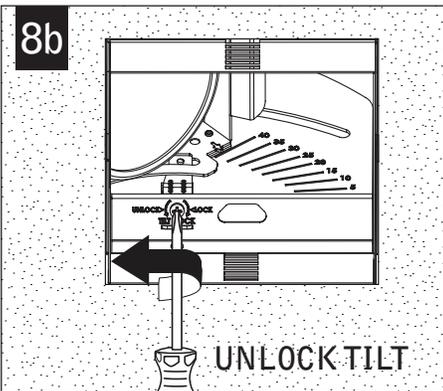

**ROTATE**

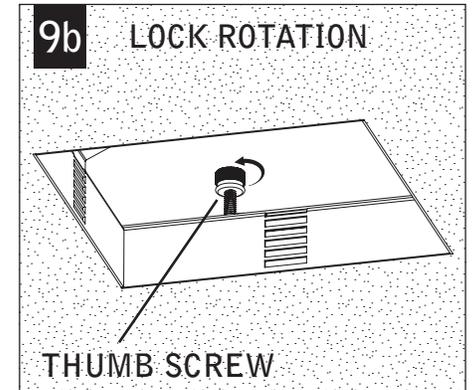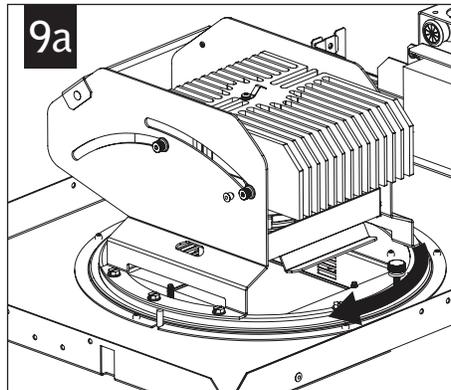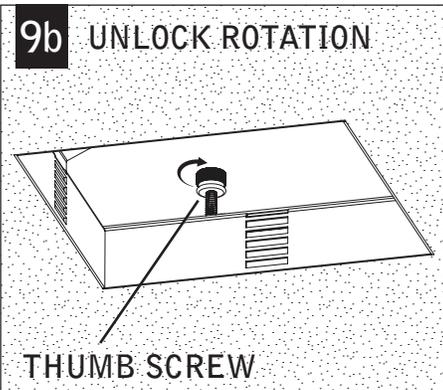


**BEAMSPREAD OPTIC SERVICE**

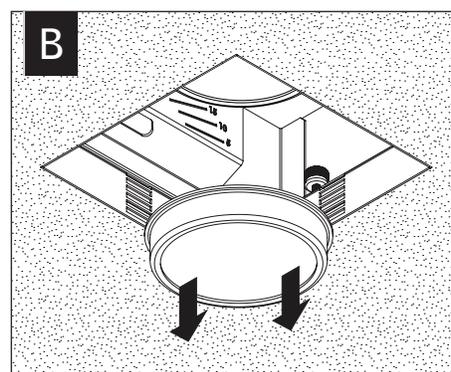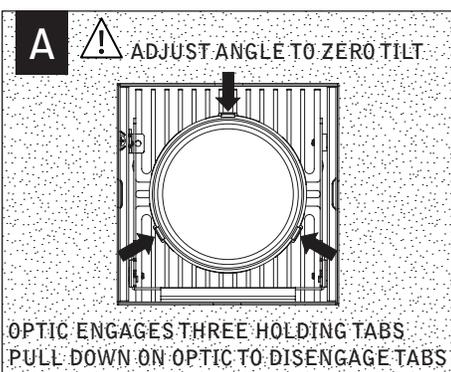






**REVERSE STEPS  
TO INSTALL  
BEAMSPREAD OPTIC**

Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).  
To prevent electrical shock, disconnect electrical supply before installation or servicing.

## TRIM INSTALLATION

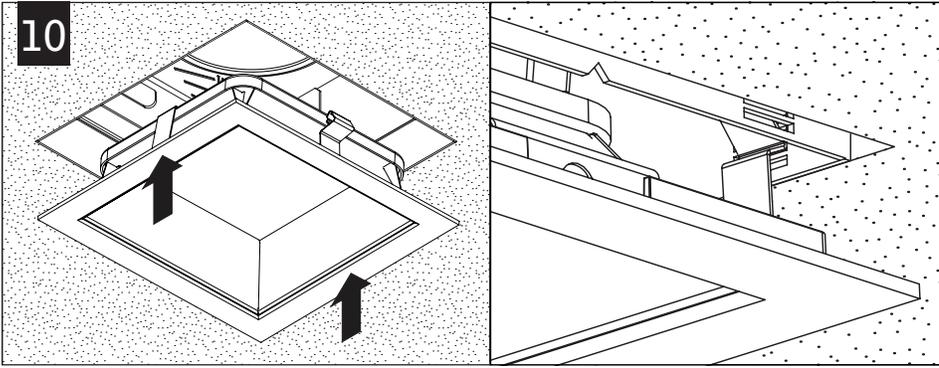

## DRIVER SERVICE

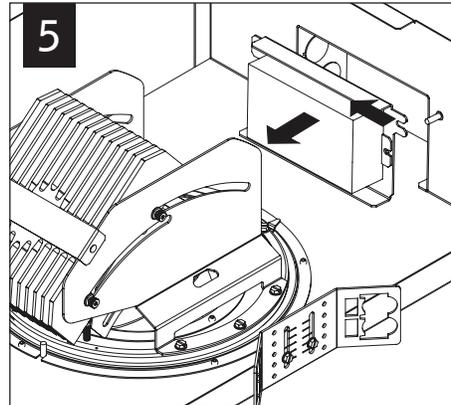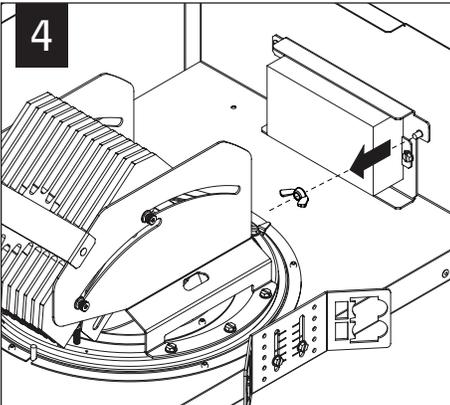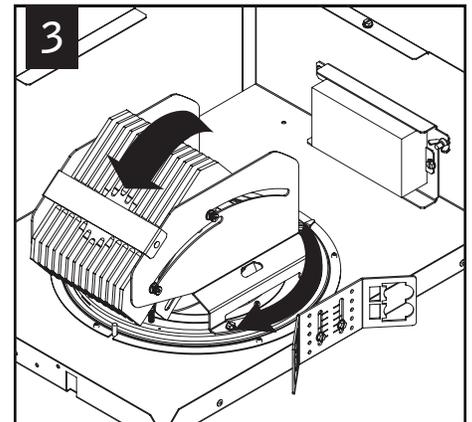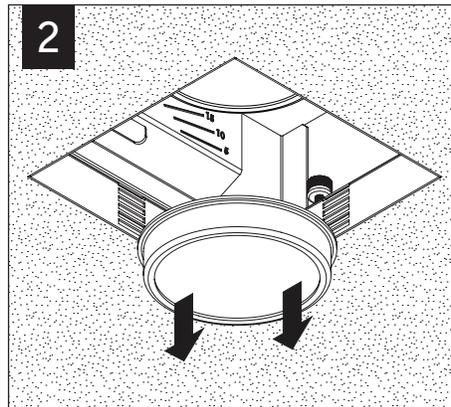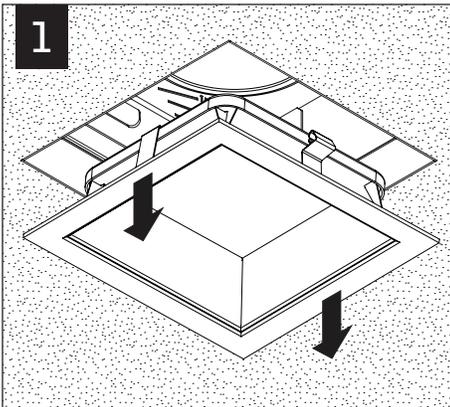

TILT & ROTATE LED MODULE  
AWAY FROM DRIVER. SEE  
INSTALLATION STEPS 8 & 9  
FOR INSTRUCTIONS.