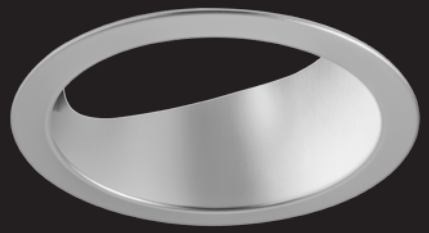

# id+ 4.5” Adjustable Accent
# BEAMSPREAD GUIDE

## 30˚ AIMING ANGLE BEAM PATTERNS

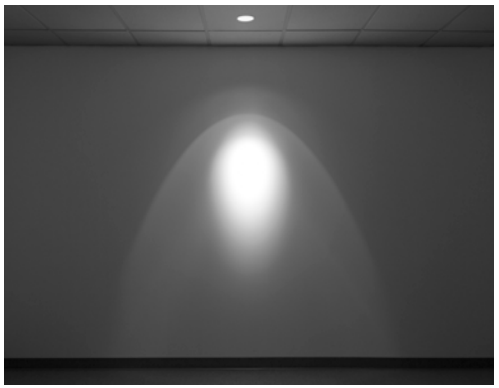

Spot (SP) without Softening Lens
Clear Diffuse Reflector (CD)

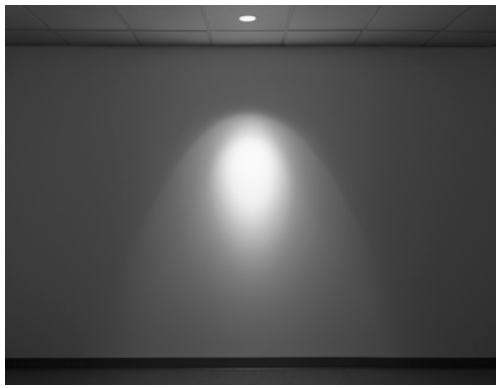

Spot (SP) with Softening Lens
Clear Diffuse Reflector (CD)

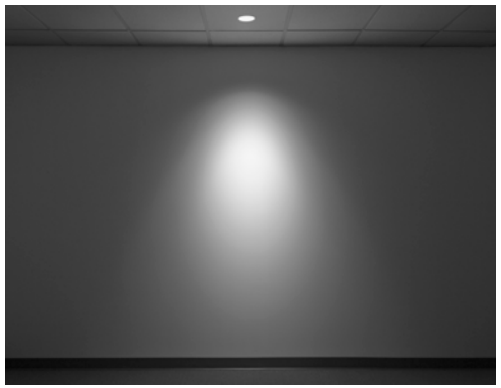

Narrow Flood (NFL)
Clear Diffuse Reflector (CD)

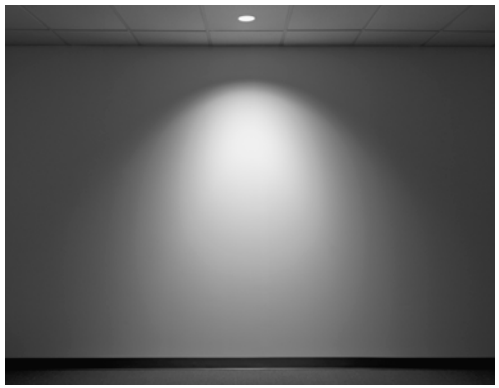

Flood (FL)
Clear Diffuse Reflector (CD)

## PERFORMANCE CHART AT 0˚

| Rated Lumen Output | Distribution | Delivered Lumens | System Watts | Beamspread | Center Beam Candlepower (CBCP) |
|---|---|---|---|---|---|
| 1000 Lumens | Spot | 1000 | 16 | 10° | 19,000 |
| | Narrow Flood | 850 | 16 | 25˚ | 4,500 |
| | Flood | 750 | 16 | 40˚ | 1,700 |
| 1500 Lumens | Spot | 1500 | 25 | 10° | 27,000 |
| | Narrow Flood | 1200 | 25 | 25˚ | 7,000 |
| | Flood | 1100 | 25 | 40˚ | 2,500 |
| 2000 Lumens | Spot | 2000 | 36 | 10° | 36,000 |
| | Narrow Flood | 1500 | 36 | 25˚ | 10,000 |
| | Flood | 1500 | 36 | 40˚ | 3,400 |
| 2500 Lumens | Spot | 2500 | 42 | 12° | 39,000 |
| | Narrow Flood | 2100 | 42 | 25˚ | 12,000 |
| | Flood | 2000 | 42 | 40˚ | 4,500 |

*Lumen output may vary +/- 5%. 3500K Color Temperature.