


ID+ 2" Cylinder


LED WALL WASH PENDANT WITH DECORATIVE REVEAL



The Naturals collection - Black/Walnut shown

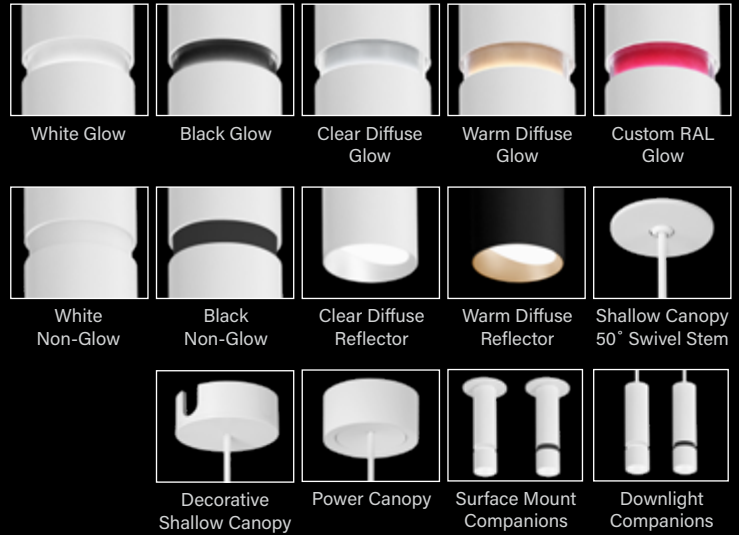

DIMENSIONAL DATA (continued on page 3)

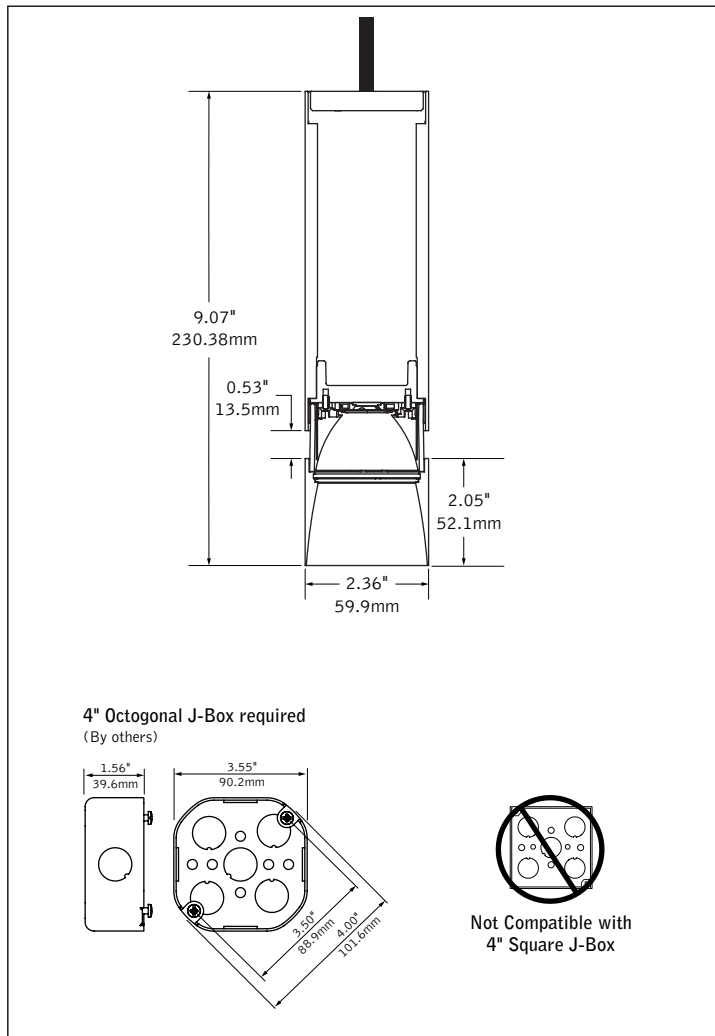

FEATURES

2" wall wash cylinder pendant with decorative reveal.

Decorative reveal available with or without glow.

Black, white and custom color option for glowing reveal.


One-piece die-cast reflector with a knife edge for a modern aesthetic.

Available with The Naturals, a series of finishes that exude biophilic beauty.

Warm Dim: Lighting that enhances spaces with a warm glow, reminiscent of incandescent or halogen light sources.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

PERFORMANCE

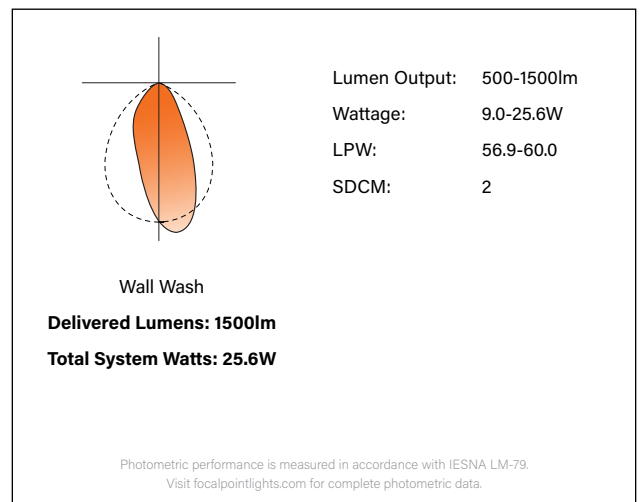

fixture:

project:

SPECIFICATIONS

LED System

Proprietary LED module with single light emitting source. May be specified in 2700K, 3000K, 3500K or 4000K in CRI>80, CRI>90 or CRI 97. 3500K and 4000K with CRI of 90 have a cyanosis observation index (COI) of 3.3 or less. Color accuracy within 2 SDCM; Warm Dim 3-5 SDCM. Aluminum heat sink provides appropriate thermal management.

Construction

Upper housing is extruded aluminum. Lower reflector is die-cast aluminum. Twist & lock construction leaves no visible fasteners within the knife edge trim. Fixture will not exceed 5 lb.

Optics

Premier lensed wall wash with carefully engineered optics enable uniform illumination from floor to ceiling. For best results, 3ft of the wall and 4ft OC fixture placement is recommended. Reflector comprise a tool-less mechanism which enables infinite horizontal rotation to aid aiming on the wall.

Electrical

Choice of constant current dimming drivers. Power factor > .9 typical. PoE compatible; Integrates with Power over Ethernet lighting systems via standard, low-voltage wires. Integral Driver not Right Light as standard, consult factory.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only. The Naturals: 100% low VOC vinyl.

Finish

Polyester powder coat applied over a multi-stage pre-treatment. Stem option is designed with a matching cylinder, fixed stem, swivel stem, and canopy finish.

Lumen Maintenance

Reported: L70 > 55,000 hours

Calculated: L70 > 200,000 hours

L80 > 55,000 hours

L80 > 124,000 hours

(Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5 year limited warranty.

PERFORMANCE TABLE

Lumen Output	Delivered Lumens	System Watts	LPW
500L	512	9.0	56.9
700L	716	11.8	60.7
 700L	632	13.9	46.0
900L	921	14.5	63.5
1100L	1126	17.4	64.7
1300L	1330	20.7	64.3
1500L	1535	25.6	60.0


3500K, 80CRI, Clear Diffuse, Wall Wash Distribution. Warm Dim based on 3000 - 1800K, 90 CRI.
Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

ORDERING			FLCY2W
Luminaire Series			
ID+ 2" Round Wall Wash Cylinder	FLCY2W		
Trim Type			RD
Round			
Decorative Reveal			
White Non-Glow Reveal	WHR		
Black Non-Glow Reveal	BKR		
White Glowing Reveal	WHG		
Black Glowing Reveal	BKG		
Clear Diffuse Glowing Reveal	CDG		
Warm Diffuse Glowing Reveal	WDG		
Custom Color Glowing Reveal			
(Specify your RAL color value. Extended lead time consult factory.)			RAL_ _ _ _
Lumen Output			
500 Lumens	500L		
700 Lumens	700L		
900 Lumens	900L		
1100 Lumens	1100L		
1300 Lumens (PC/DPC only)	1300L		
1500 Lumens (PC/DPC only)	1500L		
Color Temperature			
(Add 9 for 90 CRI or H for 97 CRI. Leave blank for 80 CRI. Examples: 2700K, 97 CRI = H27K. 2700K, 80 CRI = 27K.)			
2700K, 80/90/97+ CRI	_27K		
3000K, 80/90/97+ CRI	_30K		
3500K, 80/90/97+ CRI	_35K		
4000K, 80/90/97+ CRI	_40K		
Warm Dim: 2700-1800K, 90+ CRI*	92718W		
Warm Dim: 3000-1800K, 90+ CRI*	93018W		
*(700L only. Not available with LTE or LV.)			
Circuit			1C
Single Circuit			
Voltage			
120/277 UNV	UNV		
(Power Canopies only. Not available with LFP or LTE.)			
120 Volt	120		
277 Volt	277		
Low Voltage	LV		
Canopy Configuration			
(BK and WH finish by default, see finishes page for details. Optional Naturals finishes may be specified for Shallow Canopy (SC) and Power Canopy (PC) by adding the finish color to the canopy code. For example: Shallow Canopy in Light Oak = SCLOK.)			
Shallow Canopy, Integral Driver	SC		
(500L, 700L, 900L, 1100L only)			
Decorative Shallow Canopy, Integral Driver	DSC		
(500L, 700L, 900L, 1100L only)			
Power Canopy	PC		
Decorative Power Canopy	DPC		
Control System & Dimming Level			
0-10V - 10% Dimming	LD1		
(277V only with SC/DSC)			
Phase Dimming	LFP		
(120V only, 500L SC and DSC only. Consult factory for recommended dimmers.)			
0-10V - 5% Dimming (120V only)	LD5		
Low Voltage, PoE compatible	LVN		
(No driver. LV voltage only. Not available with Warm Dimming.)			
0-10V - <1% Dimming	LZ1		
0-10V - 1% Dimming	L11		
Lutron Hi-Lume EcoSystem (LDE1) -	LH1		
1% Dimming			
DALI - 0% Dimming	DZ1		
DALI - 1% Dimming	D11		
Mounting			
12", 50° Swivel Stem	B12		
18", 50° Swivel Stem	B18		
2'- 8' in 1' increments, 50° Swivel Stem	B_		
(Specify in inches, example: 8' stem = B96)			
12", Fixed Stem	S12		
18", Fixed Stem	S18		
2'- 8' in 1' increments, Fixed Stem	S_		
(Specify in inches, example: 8' stem = S96)			
Optic			WW
Wall Wash*			WW
Reflector Color			
Clear Diffuse	CD		
Warm Diffuse	WD		
Luminaire Finish			
Upper Housing Finish			
Lower Housing Finish			
(Specify an upper and lower housing finish. See finishes page for The Naturals options and standard color combinations for cylinder, cord/stem, and canopy.)			
Black	BK		
White	WH		

*Changing to a Downlight from a Wall wash will result in a step higher nominal lumen than originally specified. Please use lumen multiplier formula to determine delivered lumen output. See the Accessories Ordering section of the Downlight cut sheet. [Download the dedicated Downlight cut sheet.](#)


DIMENSIONAL DATA CONTINUED

SC - Shallow Canopy, Integral Driver

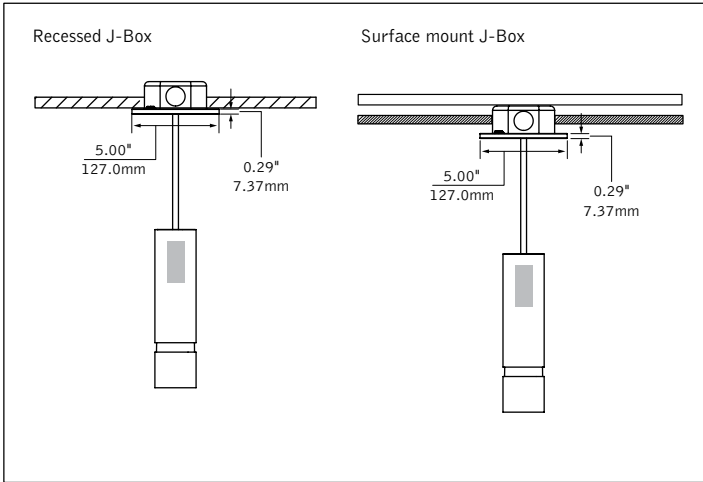

PC - Power Canopy

Indicates Driver Location

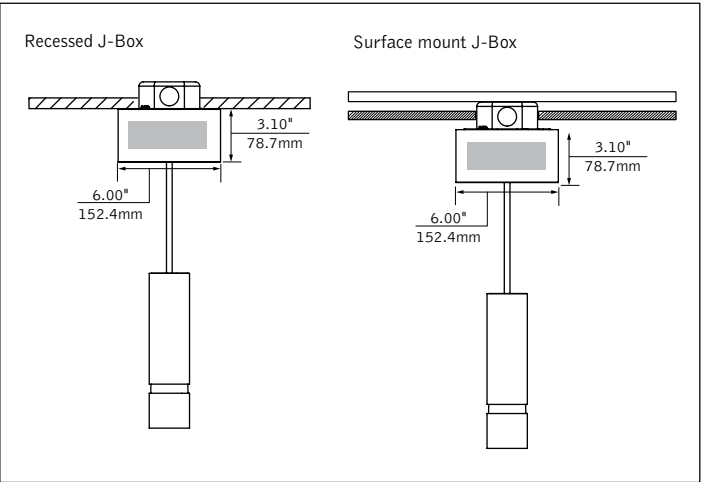

DSC - Decorative Shallow Canopy, Integral Driver



DPC - Decorative Power Canopy



2" CYLINDER LUMEN MULTIPLIER TABLE

Color Temperature & CRI

Trim Type	Optic	Color Temperature	Multiplier
Round [RD]	ALL	2700K, 80+ CRI [27K]	0.92
		2700K, 90+ CRI [927K]	0.79
		2700K, 97+ CRI [H27K]	0.67
		3000K, 80+ CRI [30K]	0.98
		3000K, 90+ CRI [930K]	0.83
		3000K, 97+ CRI [H30K]	0.72
		3500K, 80+ CRI [35K]	1.00
		3500K, 90+ CRI [935K]	0.82
		3500K, 97+ CRI [H35K]	0.73
		4000K, 80+ CRI [40K]	1.01
		4000K, 90+ CRI [940K]	0.84
		4000K, 97+ CRI [H40K]	0.76
		2700-1800K, 90+ CRI [92718W]	0.87
		3000-1800K, 90+ CRI [93018W]	0.90

Color

Trim Type	Optic	Color	Multiplier
ALL	Wall Wash [WW]	Clear Diffuse [CD]	1.00
		Warm Diffuse [WD]	1.00

Multiplier tables are provided to aid with estimation of lumen levels across options. Apply multipliers against ordered Lumen Output to estimate Delivered Lumens. Refer to IES files for most accurate photometric information.


How To Use Lumen Multipliers

Formula: (Lumen Output Value) x (Color Temperature & CRI) x (Color)

Example: FLCY2W-RD-1000L-935K-WW-WD
(1100) x (0.82) x (1.00) ≈ 902 lm (estimated delivered lumens)

WALL WASH DESIGN GUIDE - 900 LUMEN EXAMPLE


Distance from bottom of fixture	Footcandles								
	Fixtures 3' from Wall			Fixtures 3.5' from Wall			Fixtures 4' from Wall		
	3' OC	3.5' OC	4' OC	3' OC	3.5' OC	4' OC	3' OC	3.5' OC	4' OC
1'-0"	3"	1 1 1	1 1 1	1 1 1	1 1 1	1 1 1	1 1 1	1 1 1	1 1 1
	6"	1 1 1	1 1 1	1 1 1	1 1 1	1 1 1	1 1 1	1 1 1	1 1 1
	9"	2 2 2	2 2 2	1 2 1	1 1 1	1 1 1	1 1 1	1 1 1	1 1 1
	12"	3 3 3	3 3 2	2 3 3	2 2 2	2 2 2	1 1 1	1 1 1	1 1 1
2'		5 6 5	4 5 4	4 5 4	3 4 3	3 4 3	3 3 3	2 3 2	2 2 2
3'		7 8 7	6 8 6	6 7 6	5 6 5	5 5 5	4 5 4	3 4 3	3 4 3
4'		9 10 9	8 10 8	7 9 8	6 8 6	6 7 6	5 6 5	4 5 4	4 5 4
5'		11 13 11	10 12 10	9 11 9	8 9 8	7 8 7	6 8 6	5 6 5	5 6 5
6'		12 15 12	11 14 11	10 13 10	9 11 9	8 10 8	8 9 8	7 8 7	6 7 6
7'		13 15 13	12 14 12	11 13 11	10 12 10	9 11 9	8 10 8	7 8 7	6 8 6
8'		13 15 13	12 14 12	11 13 11	10 12 10	9 11 9	9 11 9	8 10 8	8 9 8
9'		12 14 12	11 13 11	10 13 10	10 12 10	9 11 10	9 11 9	8 10 8	8 9 8
10'		11 13 11	10 12 11	10 12 10	10 11 10	9 11 9	9 10 9	8 10 8	8 9 8

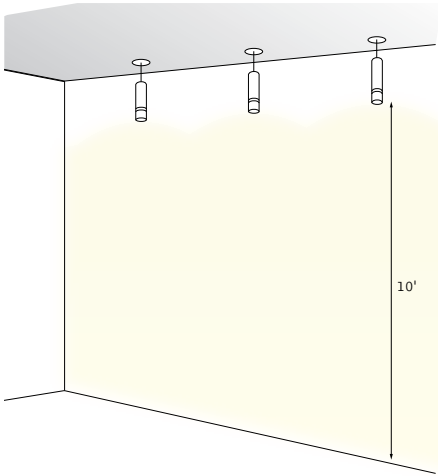

Finishes



STANDARD FINISHES

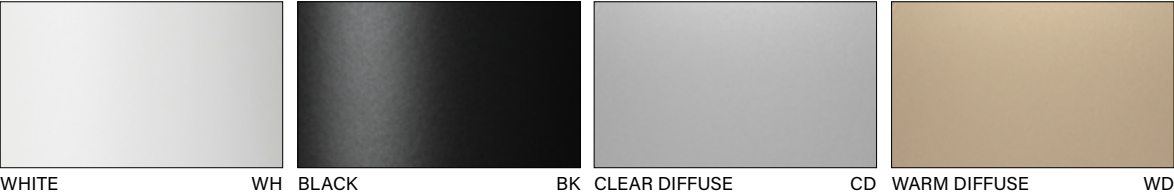

THE NATURALS (25% SCALE)



STANDARD COLOR COMBINATIONS*

Upper Housing Finish	Lower Housing Finish	Cord/Stem/Canopy Color
Black (BK)	Black (BK)	Black
	Light Oak (LOK)	
	Grey Elm (GRE)	
	Chestnut (CHT)	
	Walnut (WLT)	
	Woven Linen (WLN)	
White (WH)	White (WH)	White
	Light Oak (LOK)	
	Grey Elm (GRE)	
	Chestnut (CHT)	
	Walnut (WLT)	
	Woven Linen (WLN)	

Upper Housing Finish	Lower Housing Finish	Cord/Stem/Canopy Color
Walnut (WLT)	Walnut (WLT)	Black
	Black (BK)	
	White (WH)	
Grey Elm (GRE)	Grey Elm (GRE)	White
	White (WH)	
	Black (BK)	
Light Oak (LOK)	Light Oak (LOK)	White
	White (WH)	
	Black (BK)	
Chestnut (CHT)	Chestnut (CHT)	White
	White (WH)	
	Black (BK)	
Woven Linen (WLN)	Woven Linen (WLN)	White
	White (WH)	
	Black (BK)	

*The Naturals finishes may be specified for shallow canopy (SC) and power canopy (PC) by adding the finish color to the canopy code. For example: Shallow Canopy in Light Oak = SCLOK.)