

ID+ 3.5" Pure Adjustable Cylinder

Surface Mount | FLCY3NS-RD-4H | FLCY3NS-RD-7H - Power Canopy



FOCAL POINT®



BEFORE YOU BEGIN

- Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
- To prevent electrical shock, disconnect electrical supply before installation or servicing.
- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.

INSTRUCTION KEY



ATTENTION



SEE ADDITIONAL INSTRUCTIONS





POWER OFF



POWER ON



COMPONENT KEY



7" HOUSING HEIGHT

4" HOUSING HEIGHT

POWER CANOPY




PLATTER MOUNTING SCREWS (#700675)



SPACER MOUNTING SCREWS (#70159)

DECORATIVE POWER CANOPY



DECORATIVE J-BOX COVER

J-BOX MOUNTING BRACKET

DRIVER CARRIAGE

CANOPY MOUNTING BRACKET

POWER CANOPY

SPACER


COVER PLARE



LUMINAIRE MUST BE INSTALLED PRIOR TO DRYWALL CEILING. ALL GRID LUMINAIRES MUST BE SECURED TO STRUCTURE ABOVE.

4" OCTAGONAL J-BOX REQUIRED

J-BOX BY OTHERS






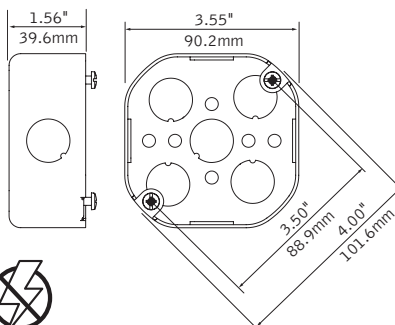


EMERGENCY













PRIOR TO LUMINAIRE INSTALLATION, SEE **PAGE 6** FOR EMERGENCY INSTALLATION INSTRUCTIONS.

DECORATIVE POWER CANOPY

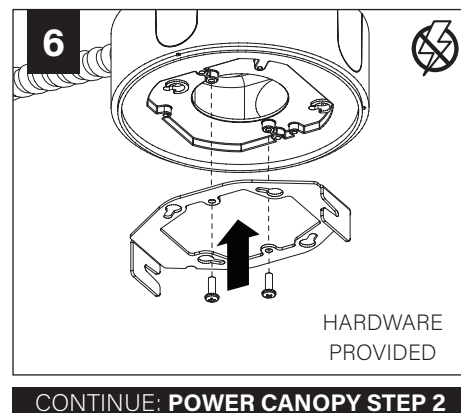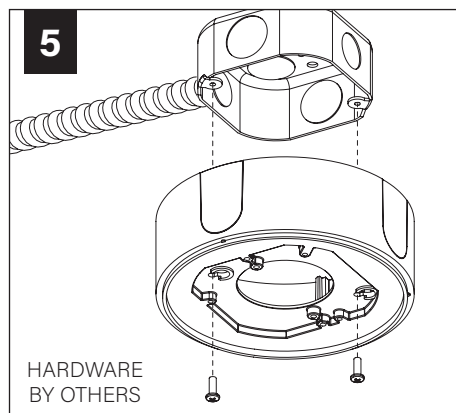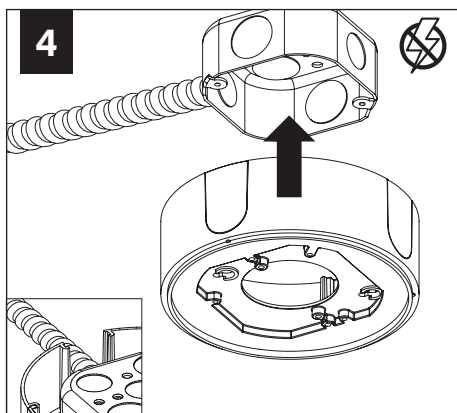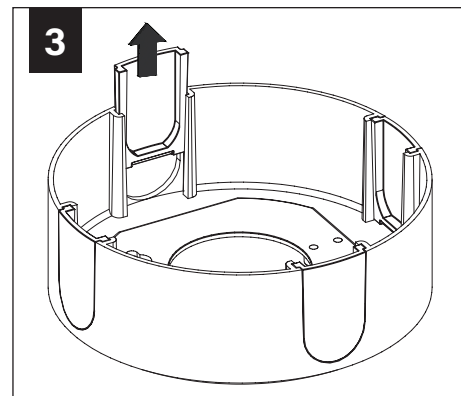
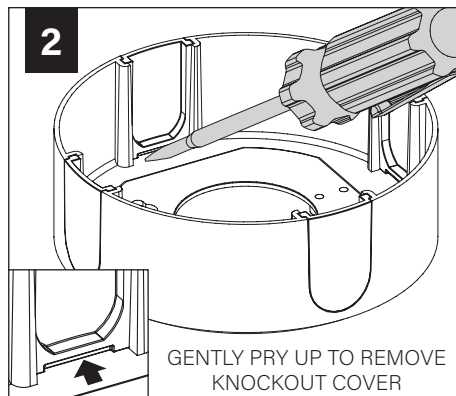
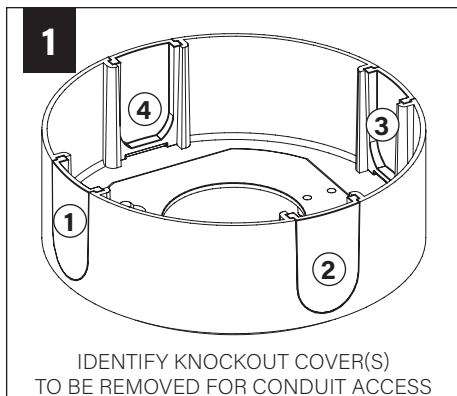


POWER CANOPY

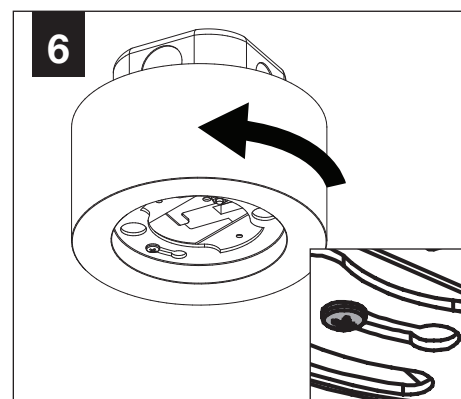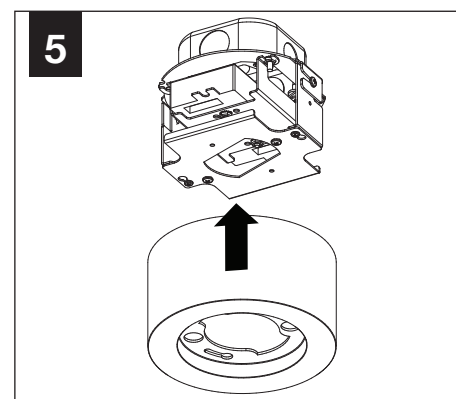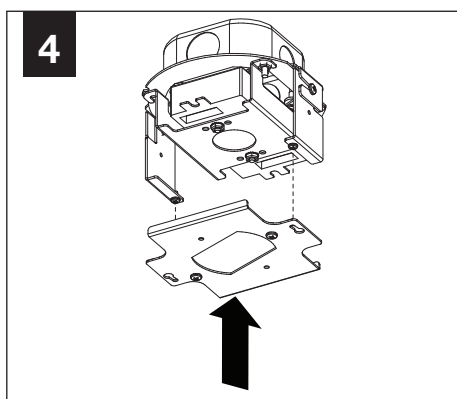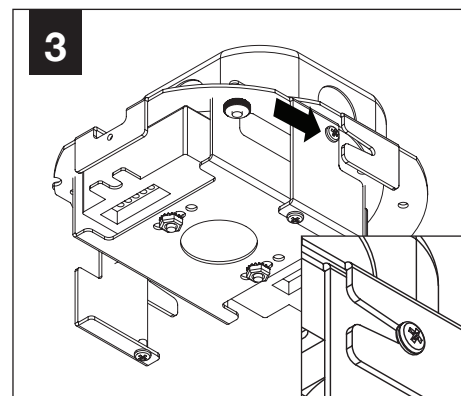
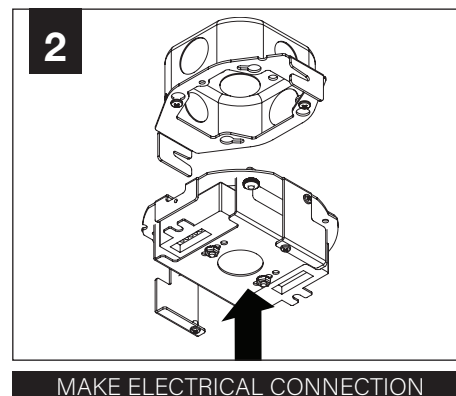
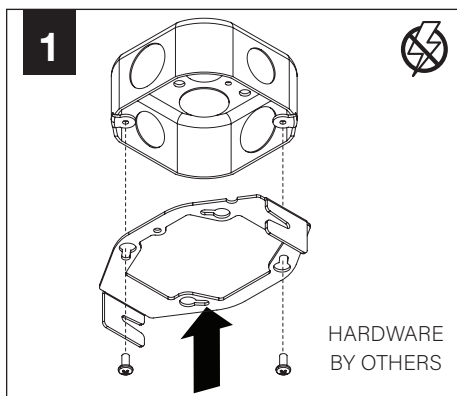


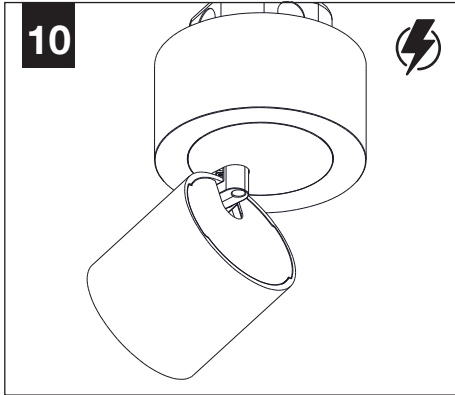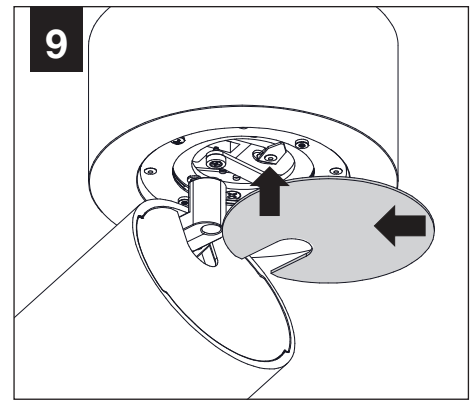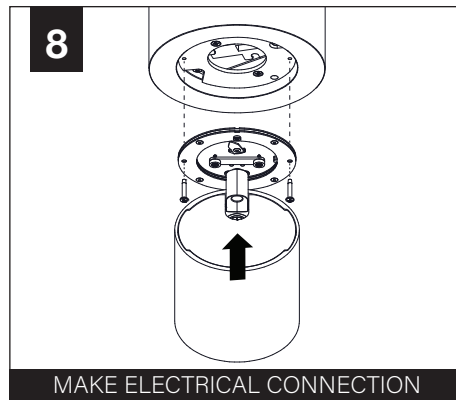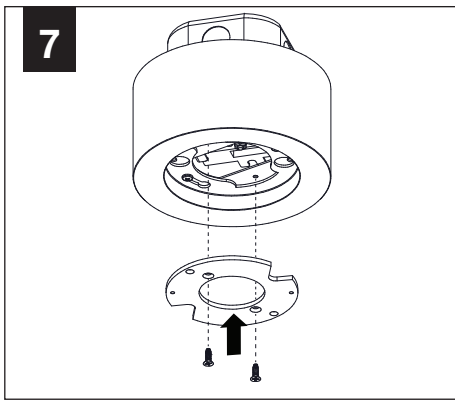




TILT AND ROTATION

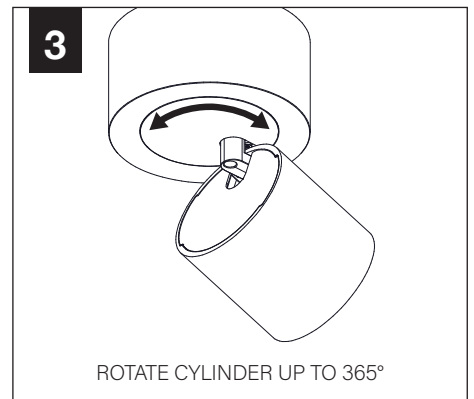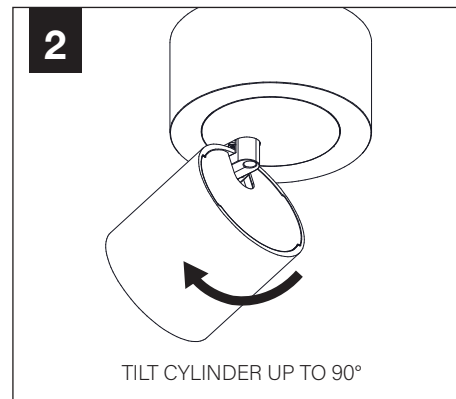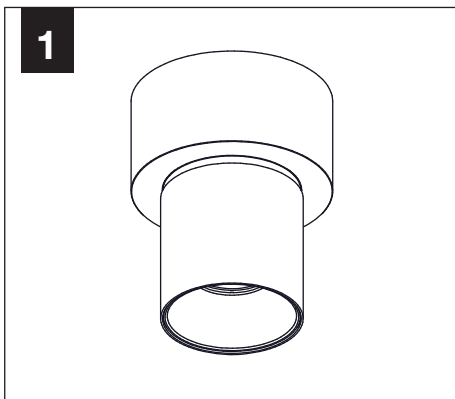

TILT LOCKING

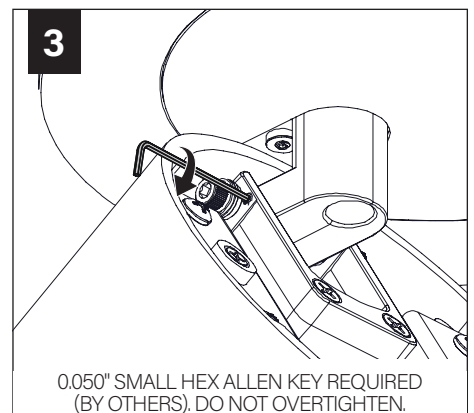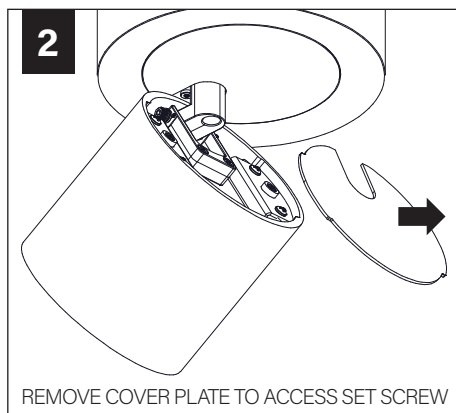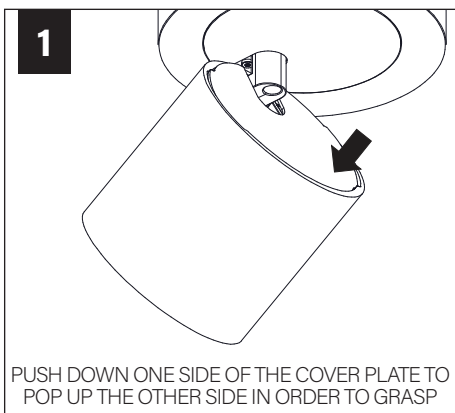







ROTATION LOCKING








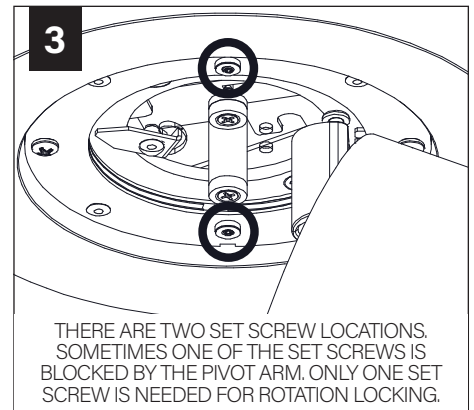
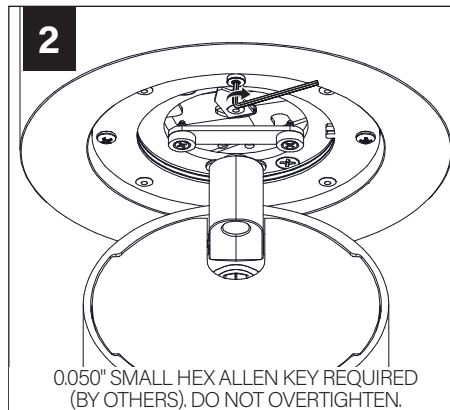
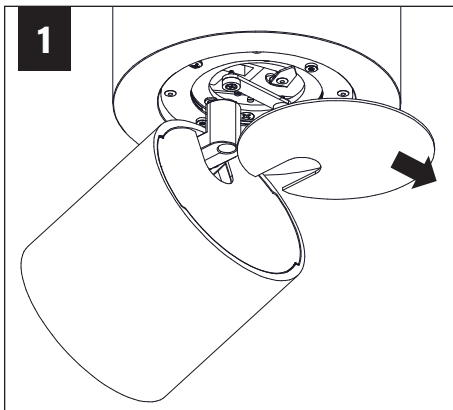



DRIVER SERVICE



**TURN OFF POWER SOURCE
PRIOR TO DRIVER SERVICE**

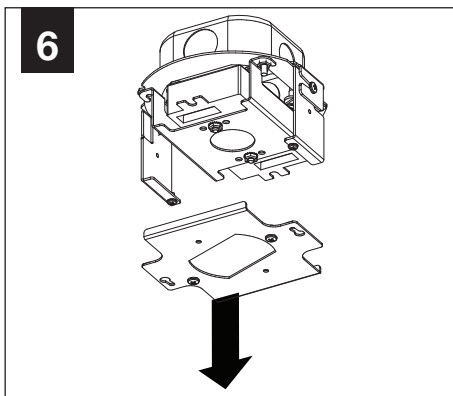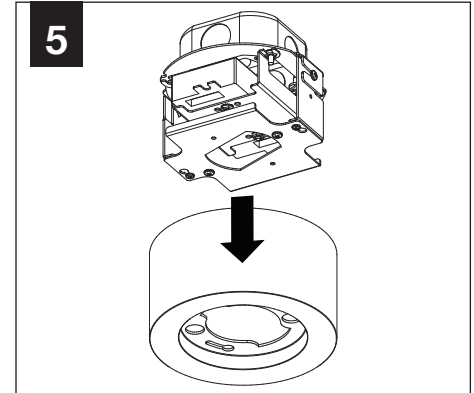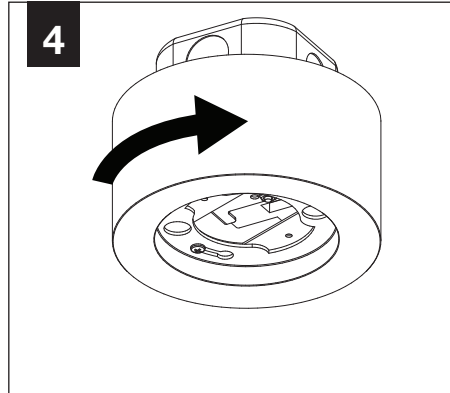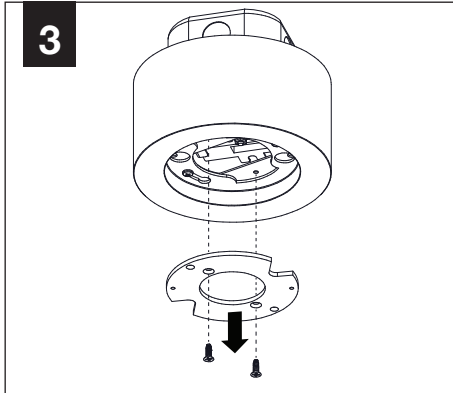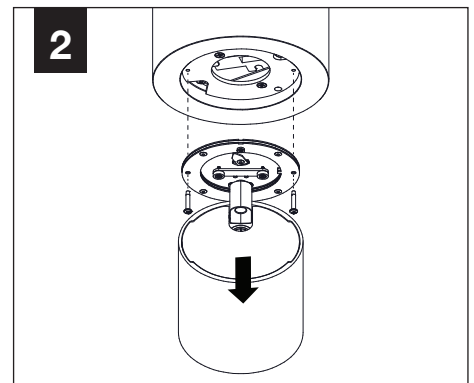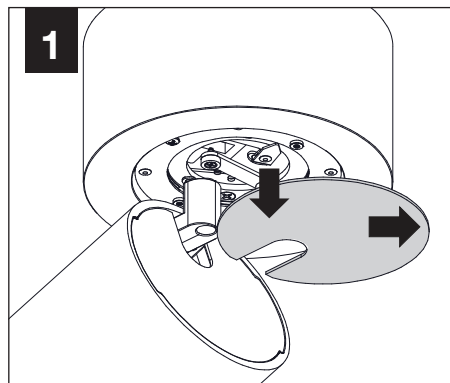

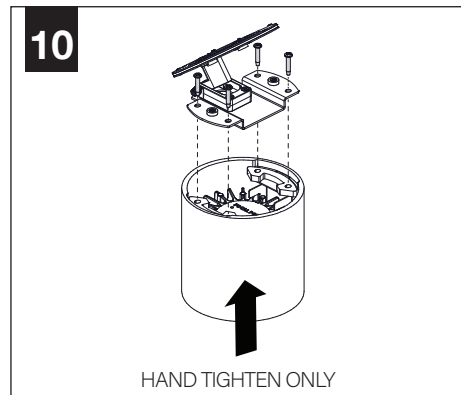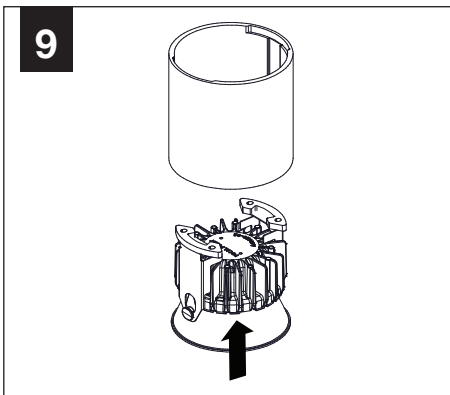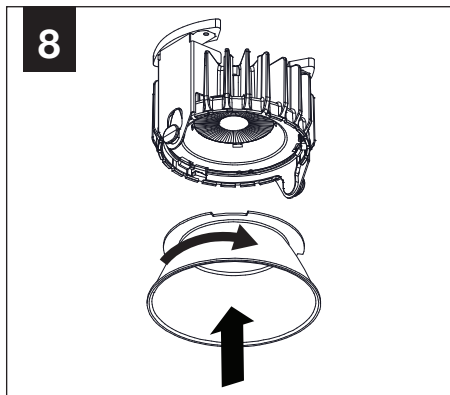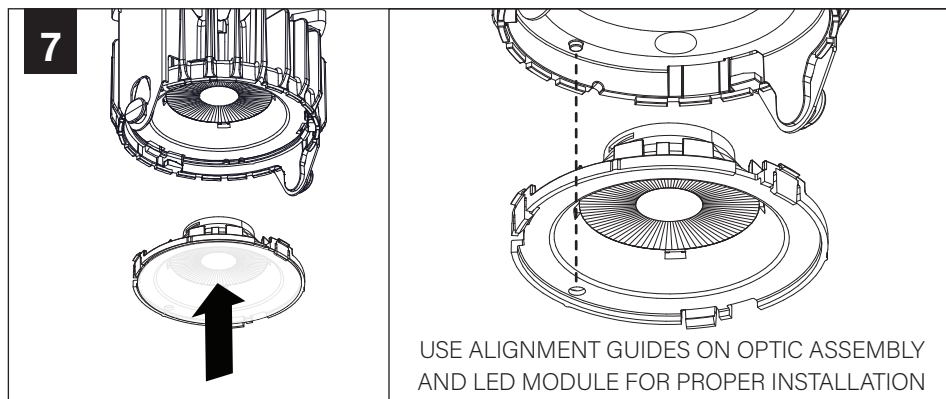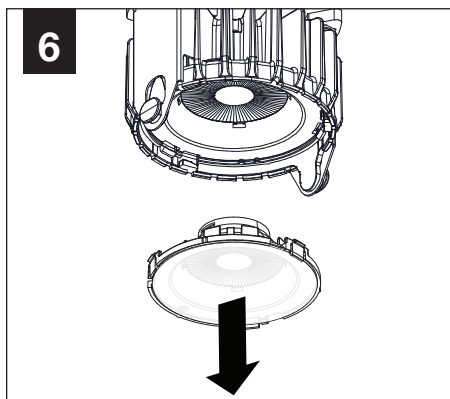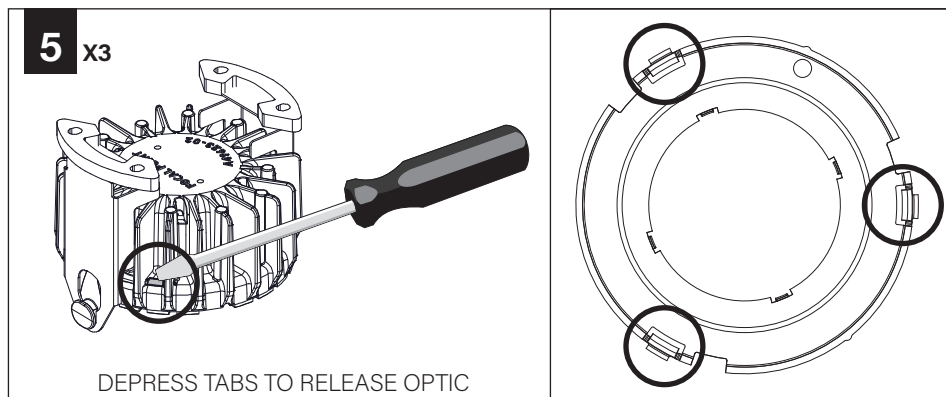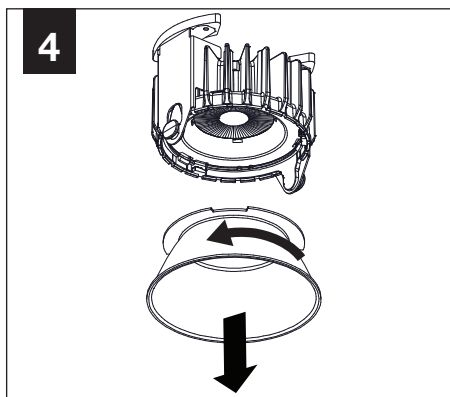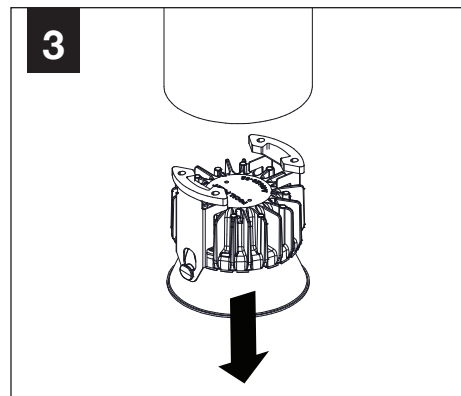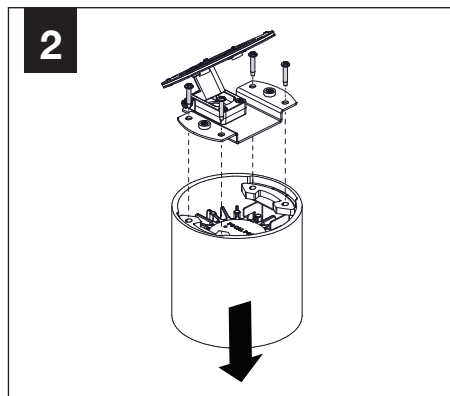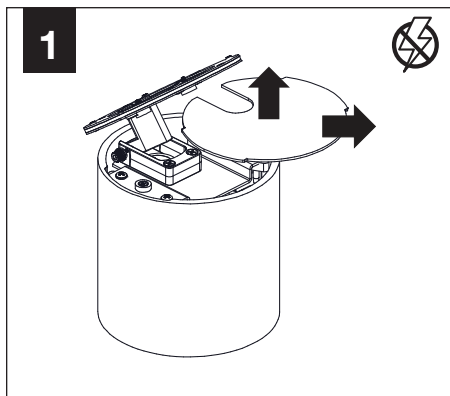

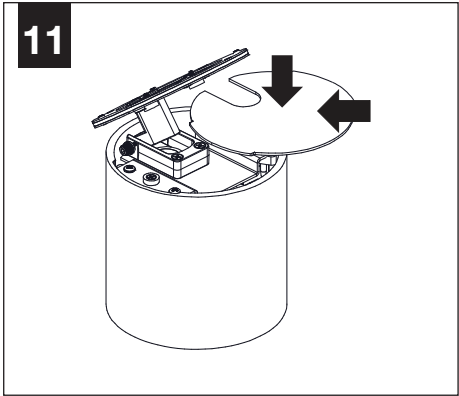

EMERGENCY



SEE BATTERY MANUFACTURER
INSTRUCTIONS


EMERGENCY MAXIMUM MOUNTING HEIGHT:

CD & WH REFLECTORS - 17.1'


WD & BK REFLECTORS - 15.1'

1


HARDWARE
BY OTHERS

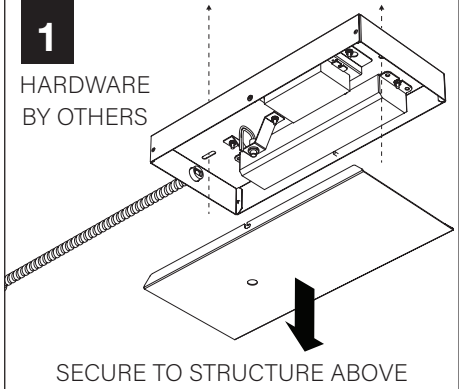


2

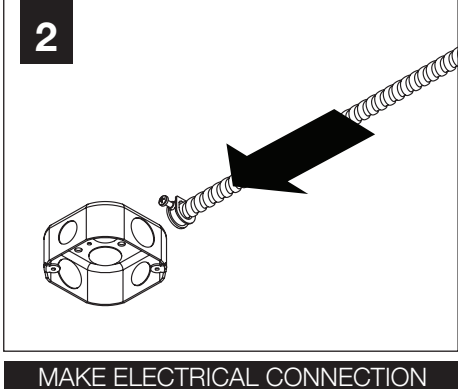

3

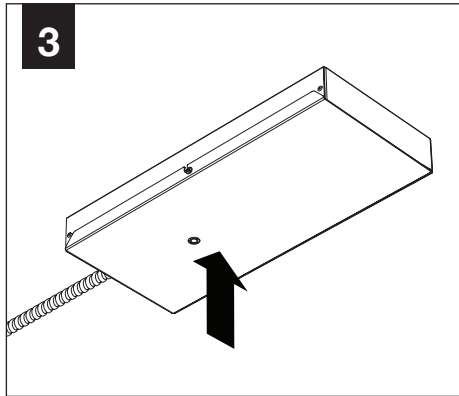

4

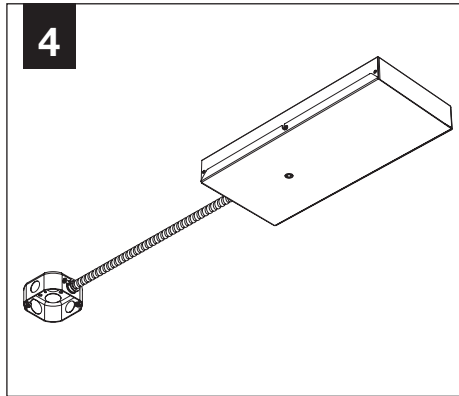

PROCEED TO
LUMINAIRE INSTALLATION