

ID⁺ 3.5" Pure Cylinder - Stem Mount

FLCY3N-RD-7H - Shallow Canopy



FOCAL POINT®



BEFORE YOU BEGIN

- Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
- To prevent electrical shock, disconnect electrical supply before installation or servicing.
- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.

INSTRUCTION KEY



ATTENTION



SEE ADDITIONAL INSTRUCTIONS



POWER OFF




POWER ON

COMPONENT KEY

STEM MOUNT

Shipped Assembled

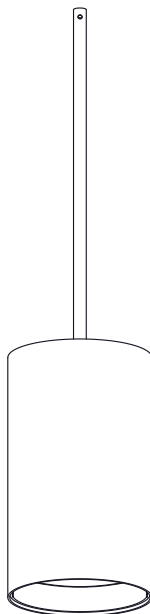

SHIPPED INSTALLED



#8-32X5/16" HALF DOG NOSE SET SCREWS

SHALLOW CANOPY




STEM MOUNTING BRACKET (FIXED STEM)




STEM MOUNTING BRACKET (SWIVEL STEM)

DECORATIVE SHALLOW CANOPY



DECORATIVE J-BOX COVER



STEM MOUNTING BRACKET (FIXED STEM)



MOUNTING SCREWS (FIXED STEM) #72023



STEM MOUNTING BRACKET (SWIVEL STEM)




MOUNTING SCREWS (SWIVEL STEM) #72029



FACEPLATE

4" OCTAGONAL J-BOX REQUIRED

J-BOX BY OTHERS

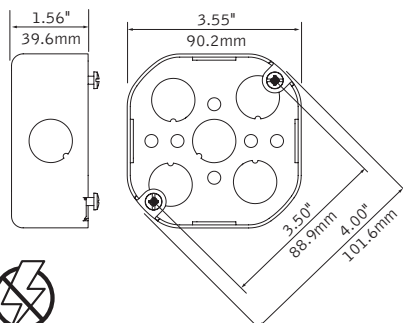


EMERGENCY








PRIOR TO LUMINAIRE INSTALLATION, SEE **PAGE 9** FOR EMERGENCY INSTALLATION INSTRUCTIONS.







SWIVEL STEM





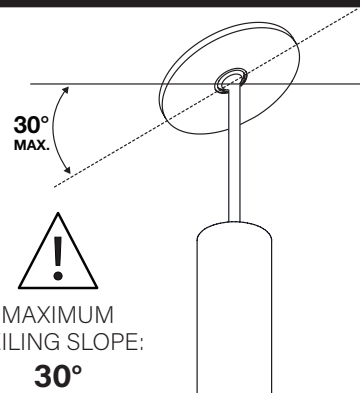


FIELD CUTTABLE SWIVEL STEM (OPTIONAL)

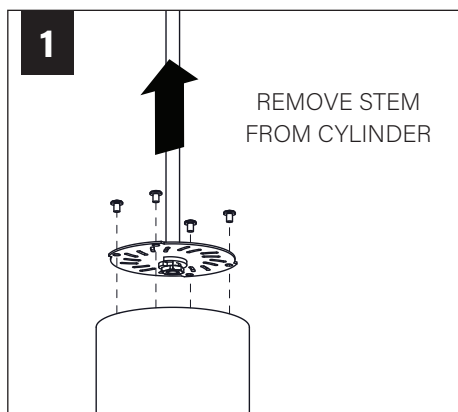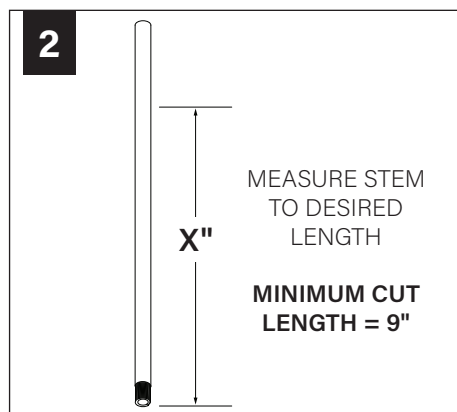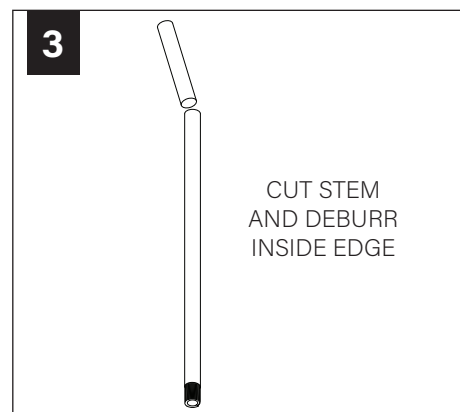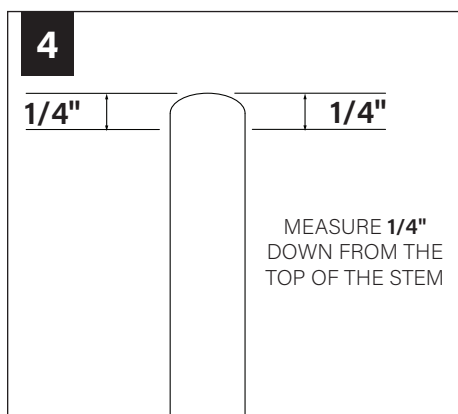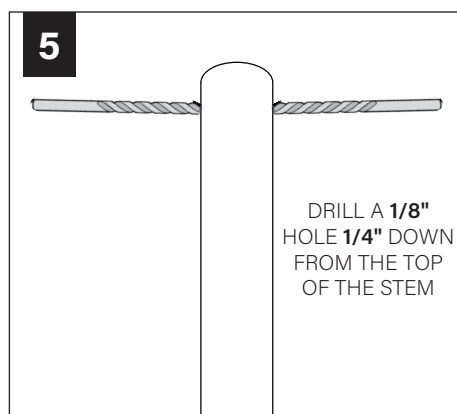







FIELD CUTTABLE FIXED STEM (OPTIONAL)

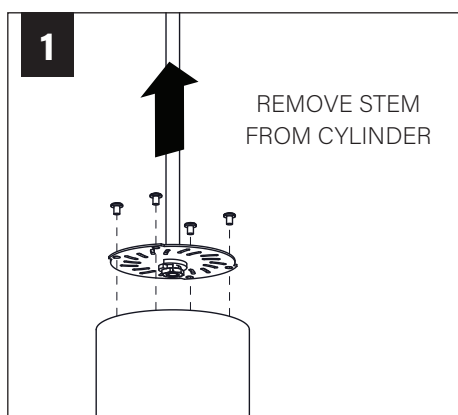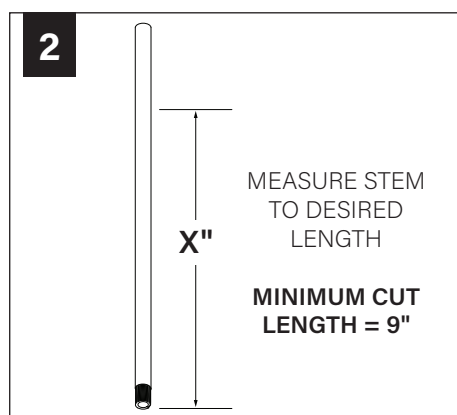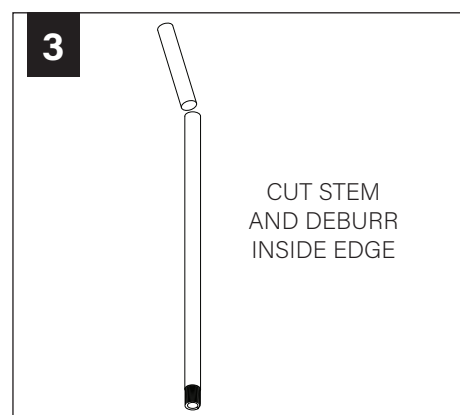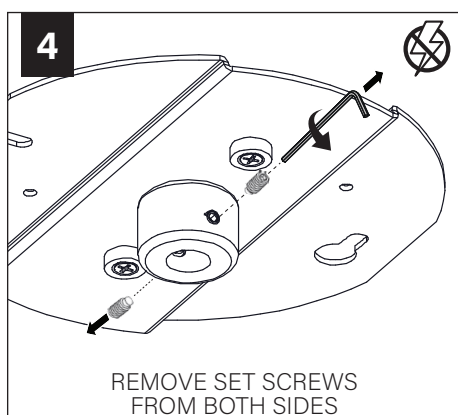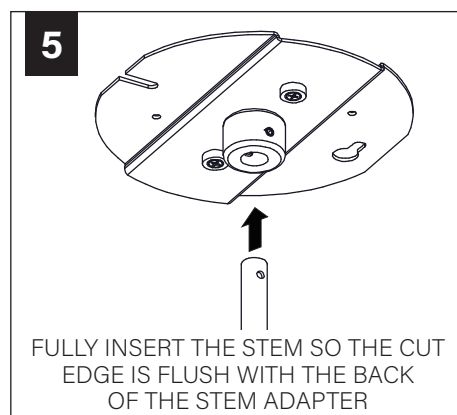
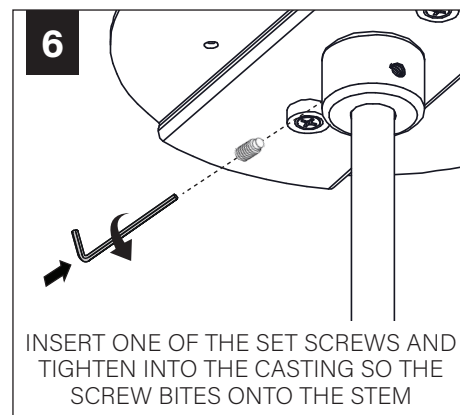


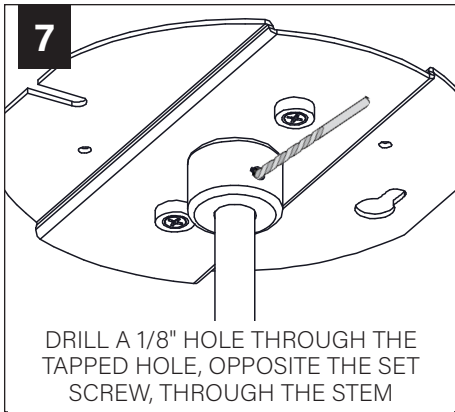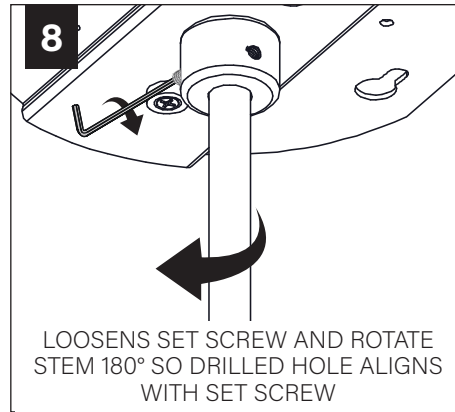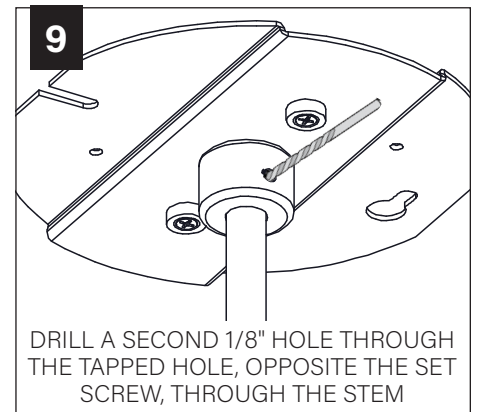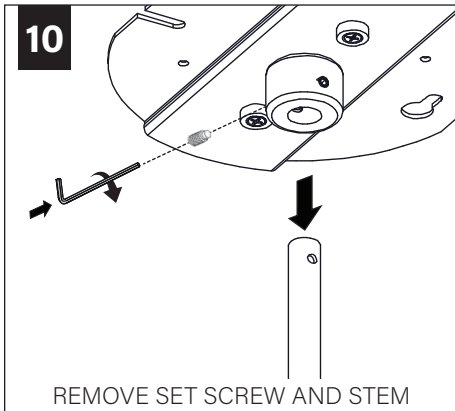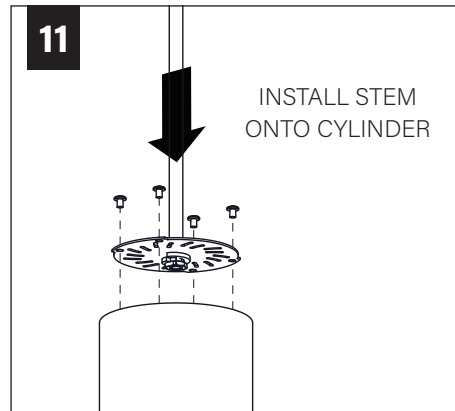









SHALLOW CANOPY

FIXED STEM

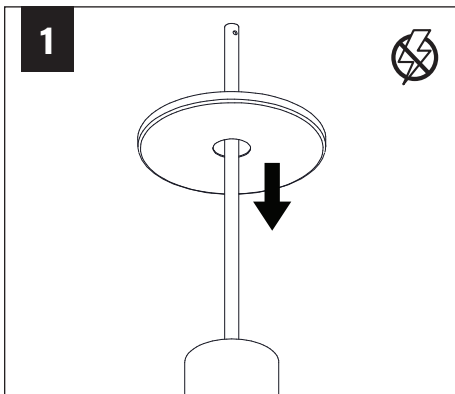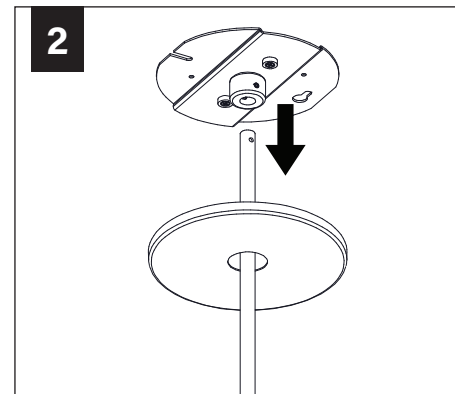
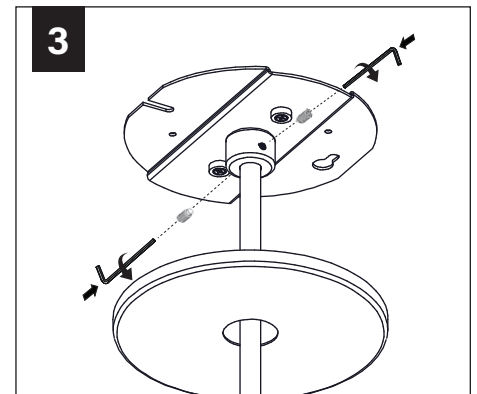
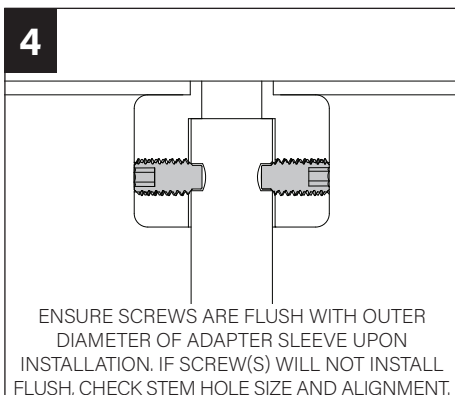
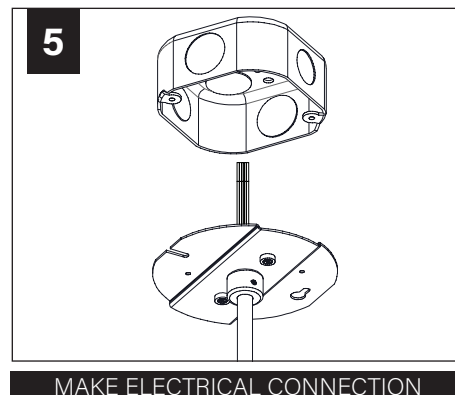
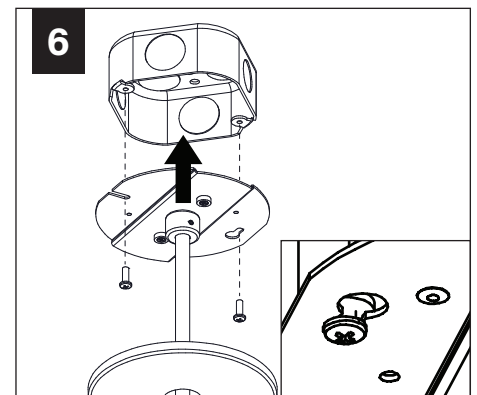


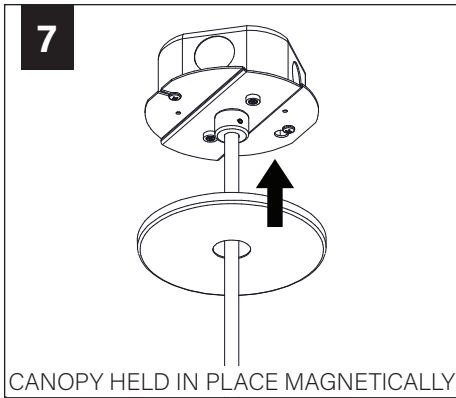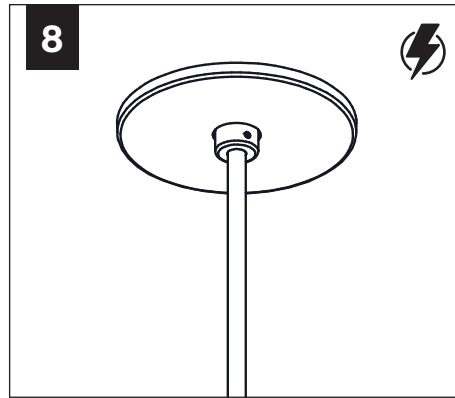







SWIVEL STEM

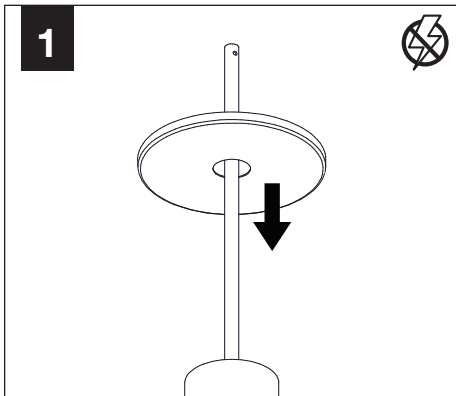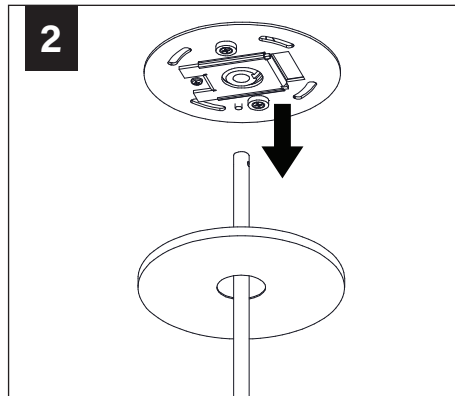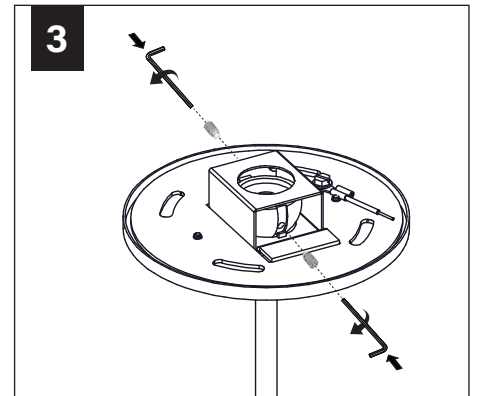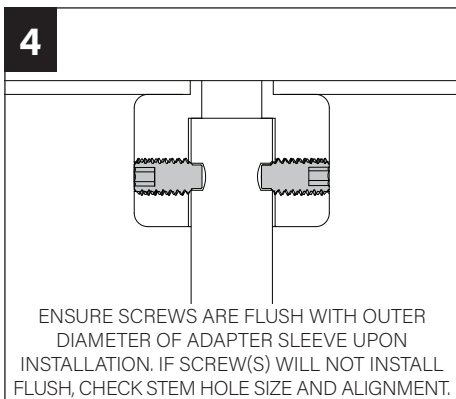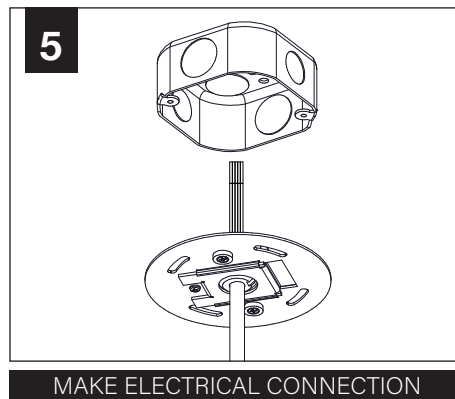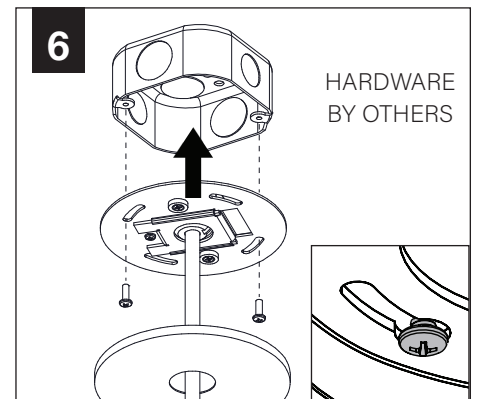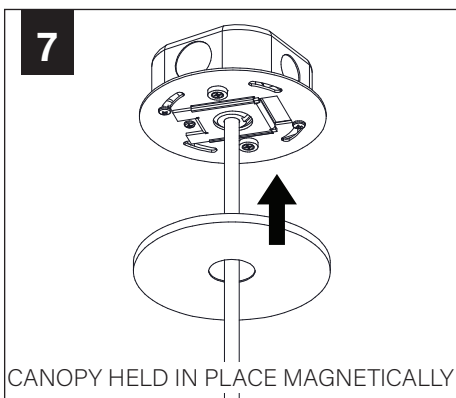
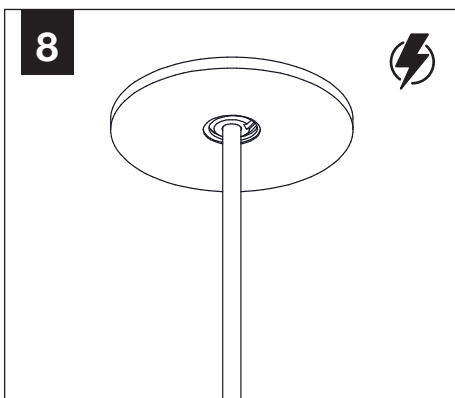


DECORATIVE SHALLOW CANOPY




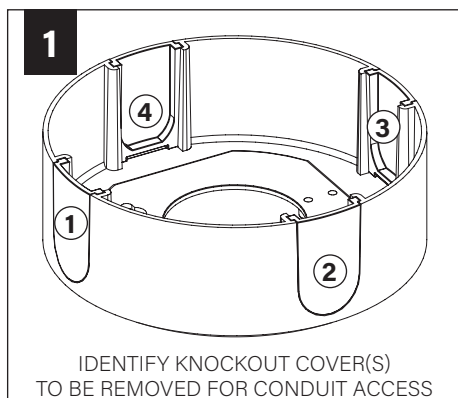
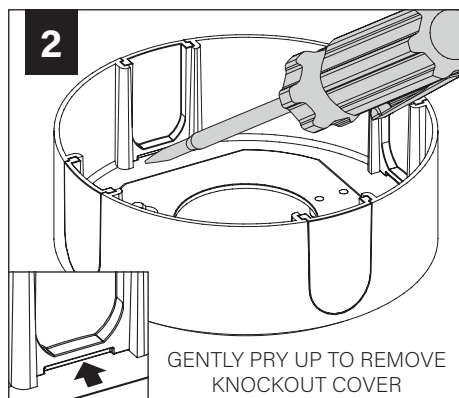
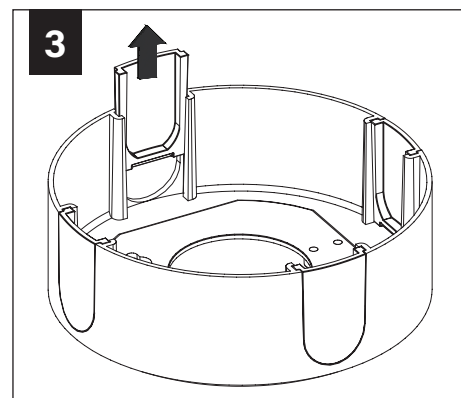
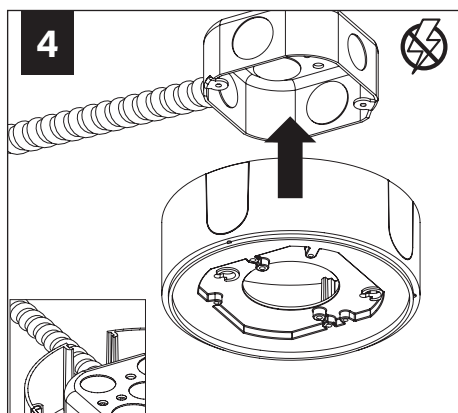
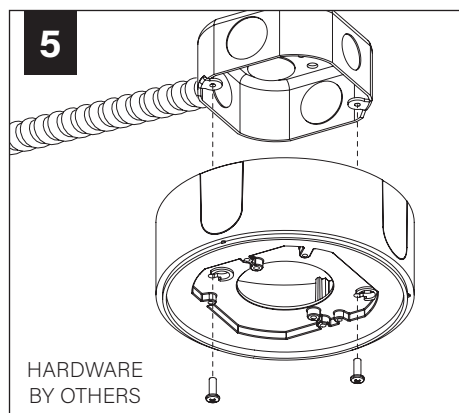


FIXED STEM

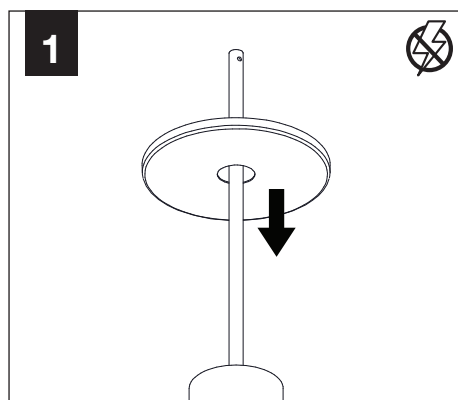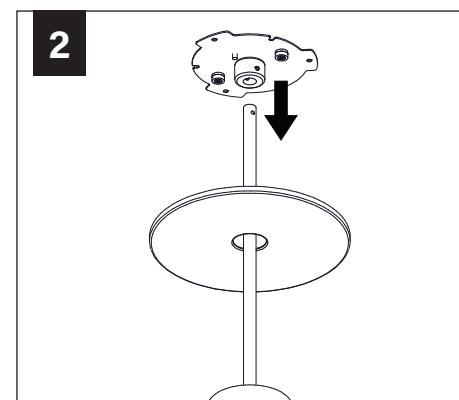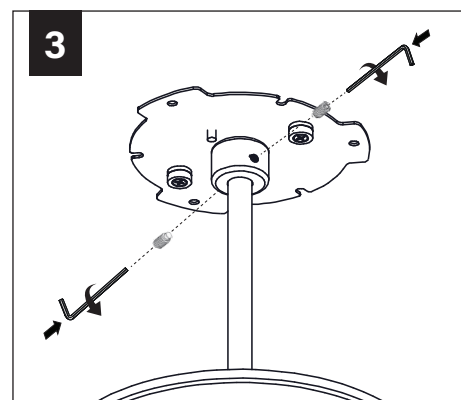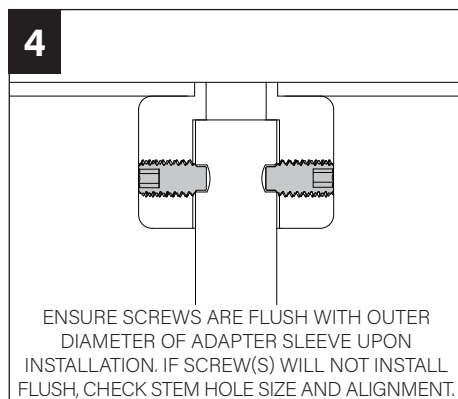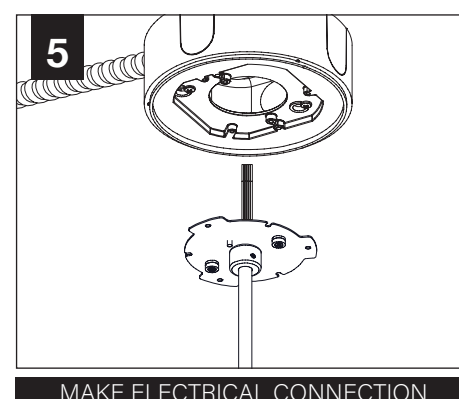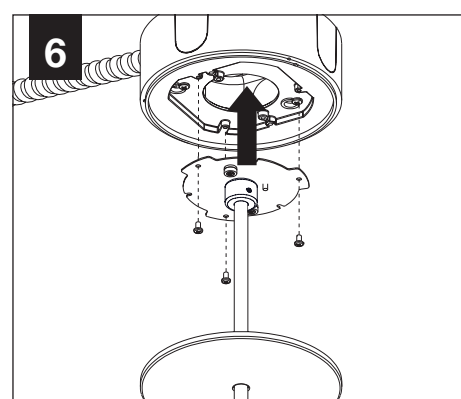

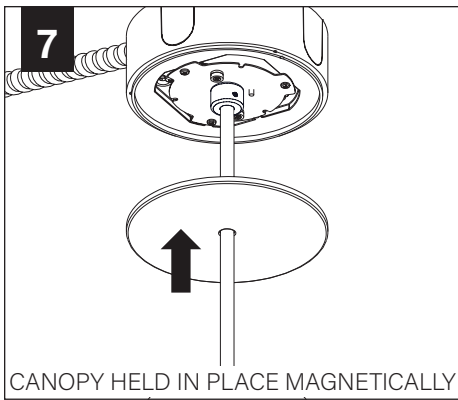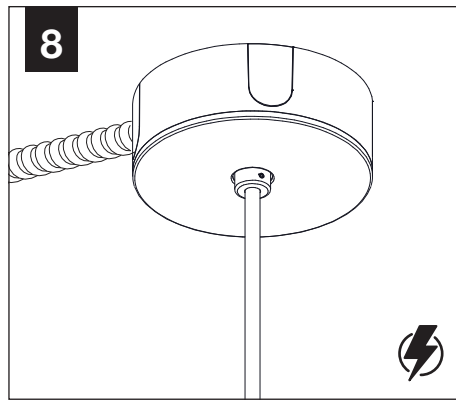

SWIVEL STEM

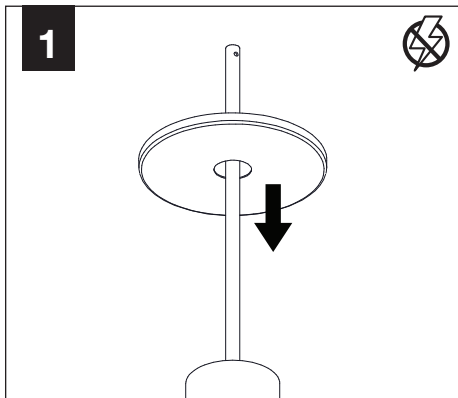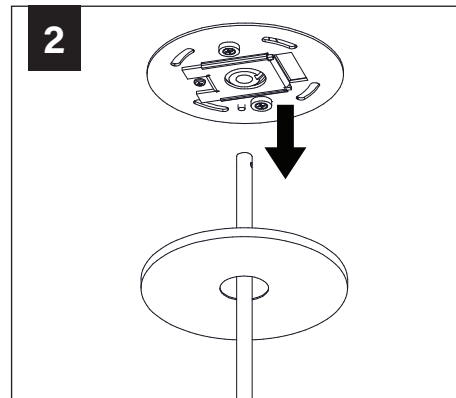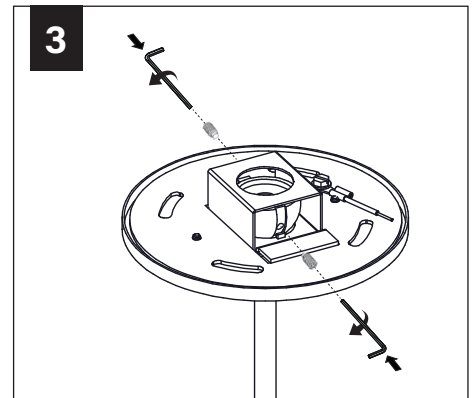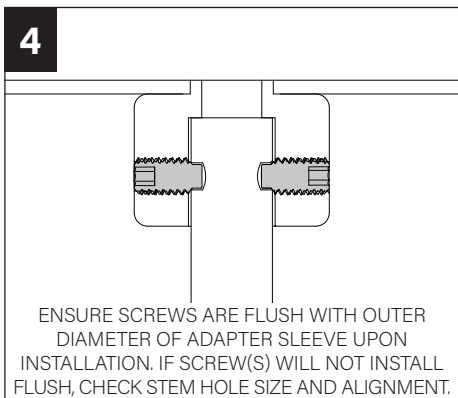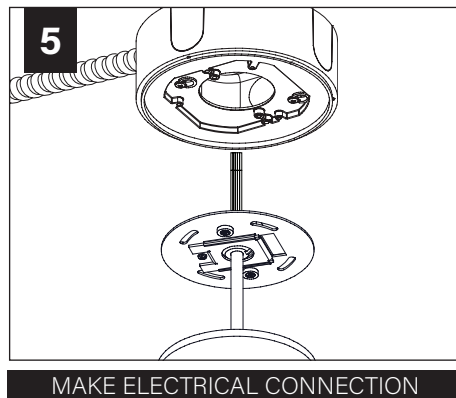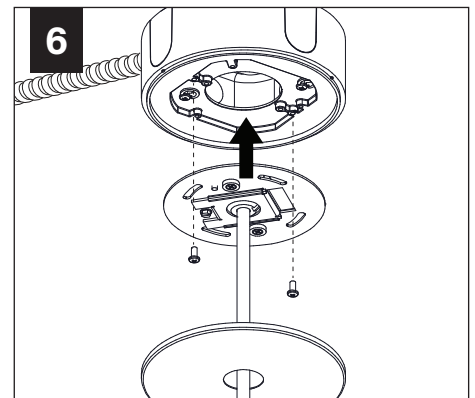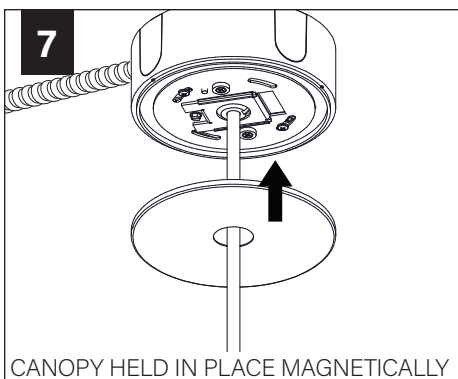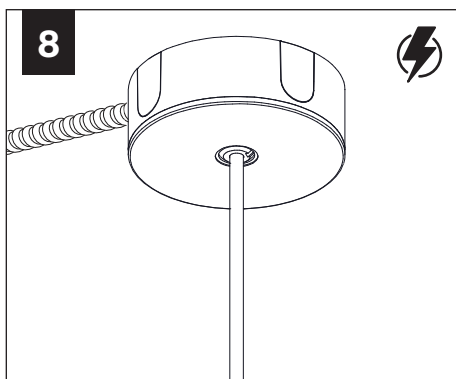


DRIVER SERVICE





**TURN OFF POWER SOURCE
PRIOR TO DRIVER SERVICE**

1

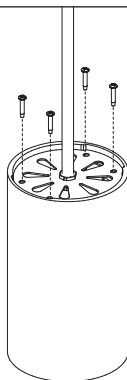


2

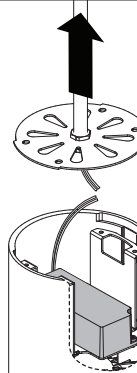

WALL WASH AIMING


1

x2

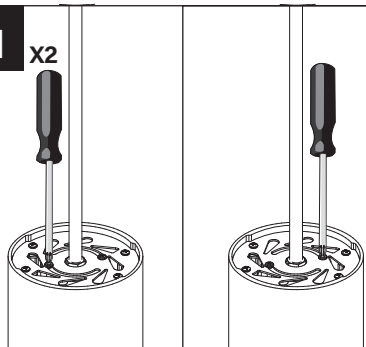

LOOSEN LOCKING SCREWS
(DO NOT REMOVE)


2

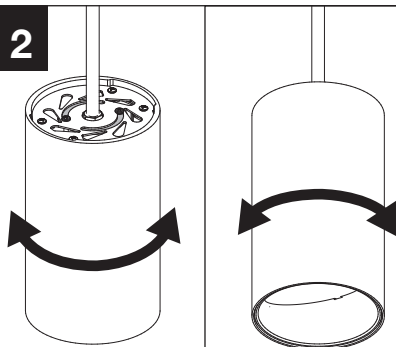

ROTATE CYLINDER TO DESIRED POSITION

3


x2

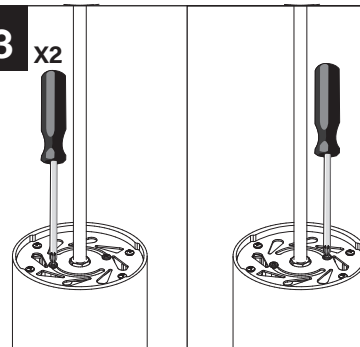



TIGHTEN LOCKING SCREWS
(DO NOT OVER TIGHTEN)

OPTIC SERVICE



1

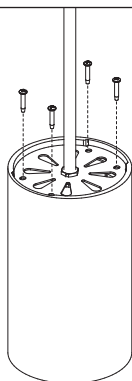


2

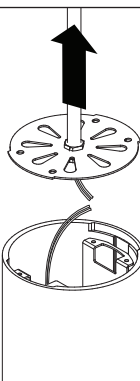

3

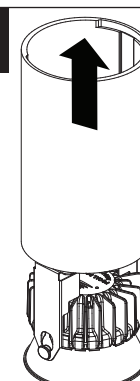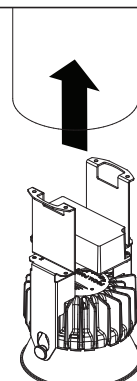


4












5

x3

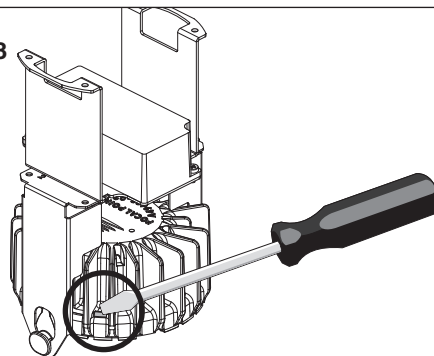

DEPRESS TABS TO RELEASE OPTIC

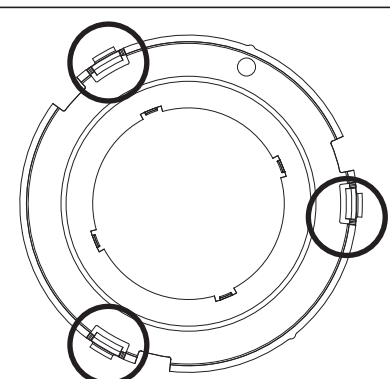

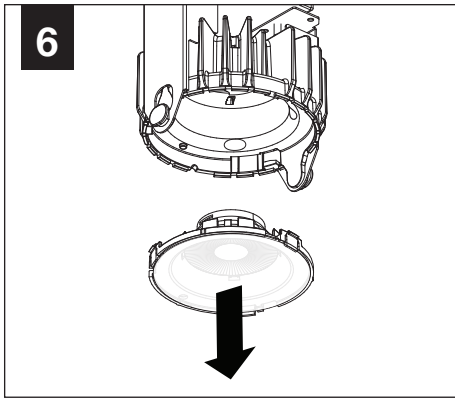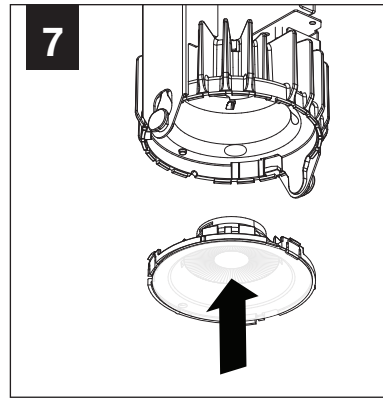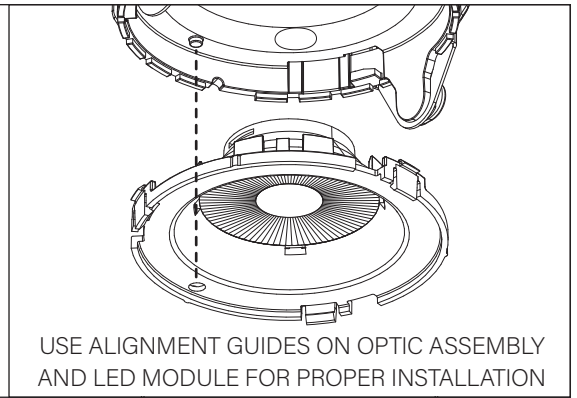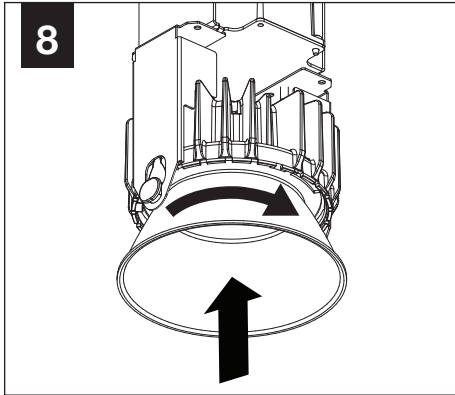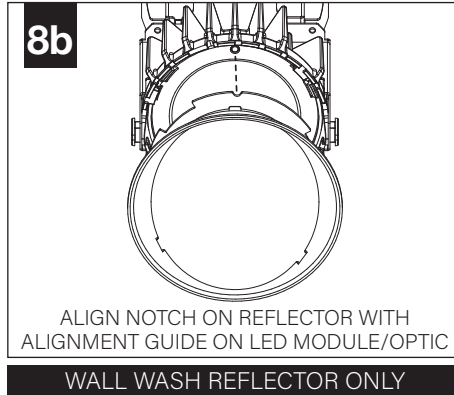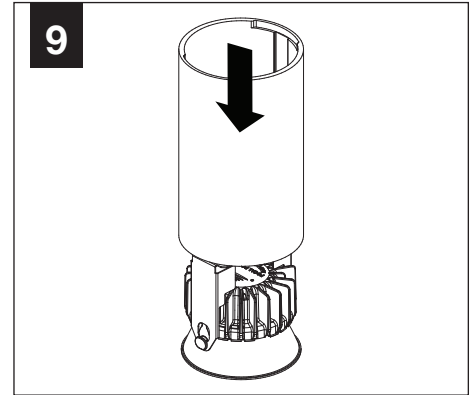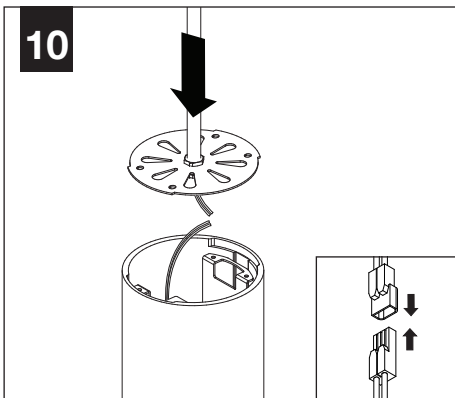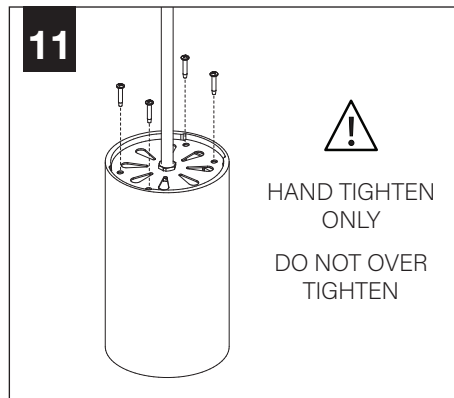

EMERGENCY



SEE BATTERY MANUFACTURER
INSTRUCTIONS


EMERGENCY MAXIMUM MOUNTING HEIGHT:

CD & WH REFLECTORS - 17.1'

WD & BK REFLECTORS - 15.1'


1

HARDWARE
BY OTHERS

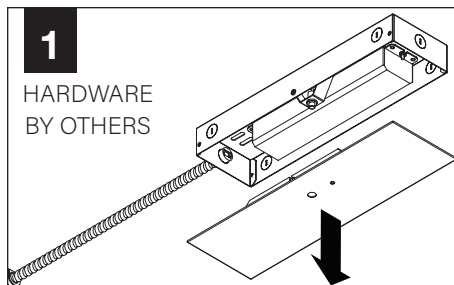


SECURE TO STRUCTURE ABOVE

2

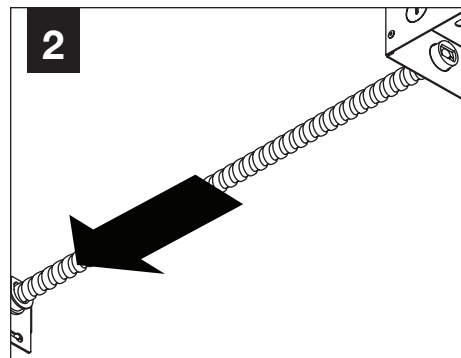


MAKE ELECTRICAL CONNECTION

3

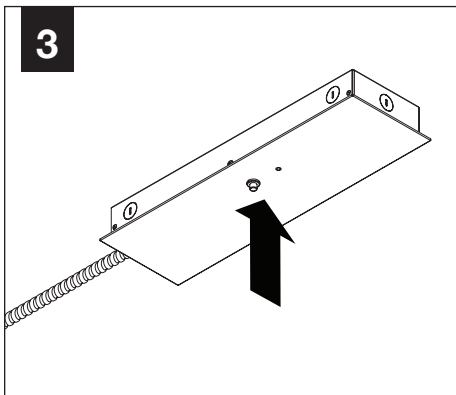

4

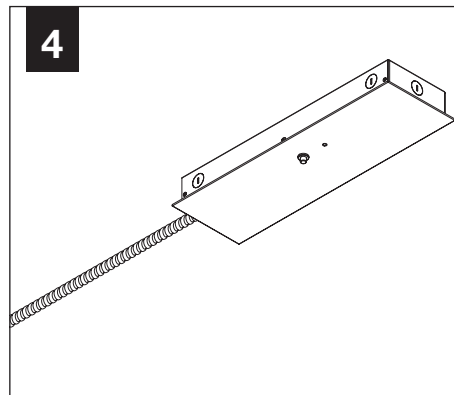

PROCEED TO
LUMINAIRE INSTALLATION