

ID+ Cylinder Surface Mount

FLCY3 | FLCY4 - Power Canopy



FOCAL POINT®



BEFORE YOU BEGIN

- Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
- To prevent electrical shock, disconnect electrical supply before installation or servicing.
- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.

INSTRUCTION KEY



ATTENTION



SEE ADDITIONAL INSTRUCTIONS




POWER OFF




POWER ON


COMPONENT KEY




POWER CANOPY




J-BOX
MOUNTING
BRACKET



DRIVER
CARRIAGE



CANOPY
MOUNTING
BRACKET




POWER
CANOPY




MOUNTING
BRACKET


DECORATIVE POWER CANOPY




DECORATIVE
J-BOX
COVER




J-BOX
MOUNTING
BRACKET




DRIVER
CARRIAGE



CANOPY
MOUNTING
BRACKET



POWER
CANOPY



MOUNTING
BRACKET




MOUNTING
SCREWS
#72000



LUMINAIRE MUST BE INSTALLED PRIOR TO DRYWALL CEILING.
ALL GRID LUMINAIRE MUST BE SECURED TO STRUCTURE ABOVE.

4" OCTAGONAL J-BOX REQUIRED

J-BOX BY OTHERS






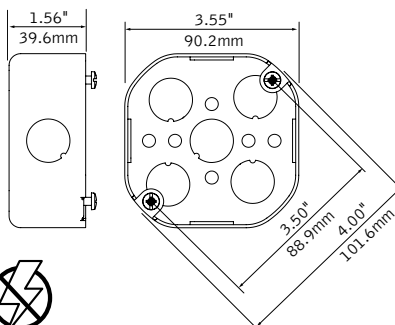


EMERGENCY









PRIOR TO LUMINAIRE INSTALLATION,
SEE **PAGE 5** FOR EMERGENCY
INSTALLATION INSTRUCTIONS.





DECORATIVE POWER CANOPY

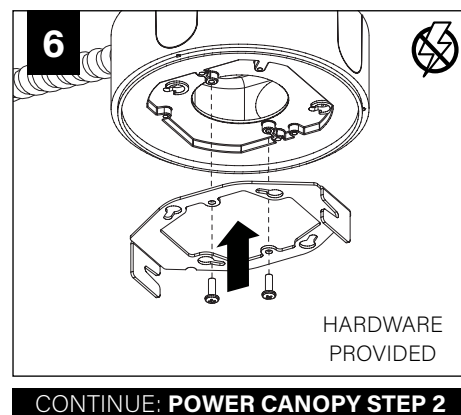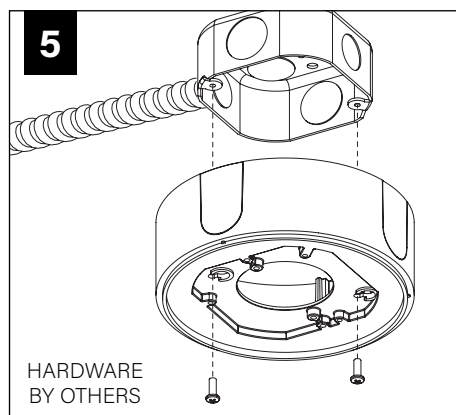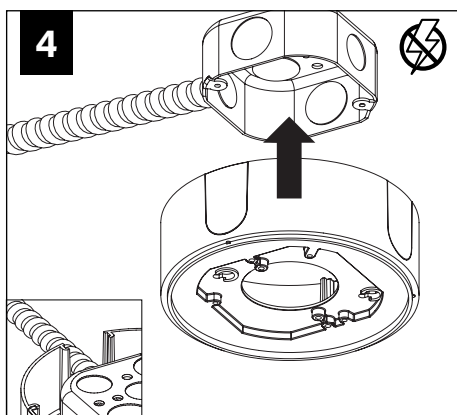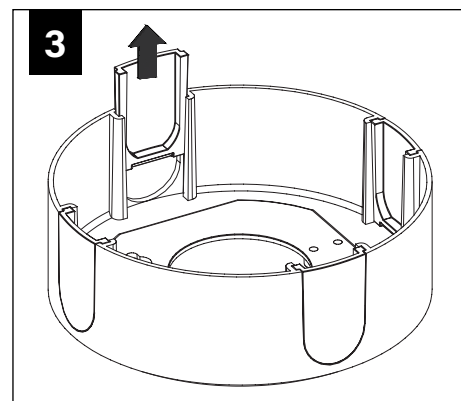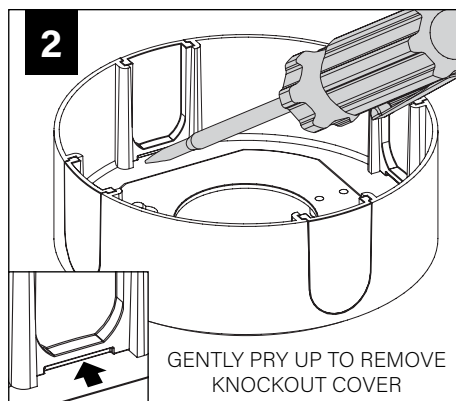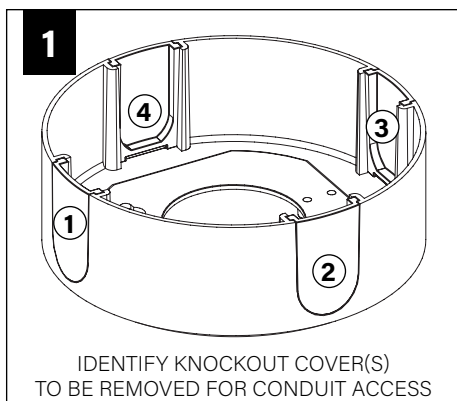







CONTINUE: POWER CANOPY STEP 2

POWER CANOPY



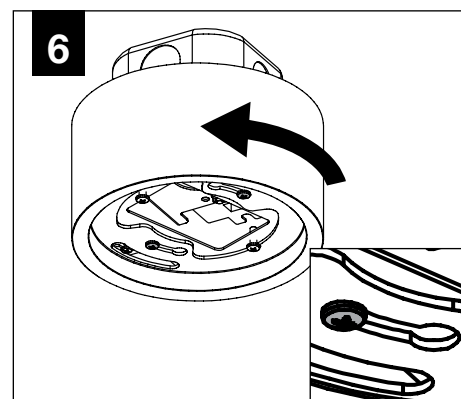
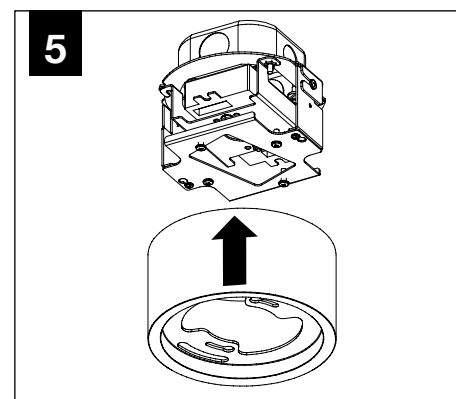
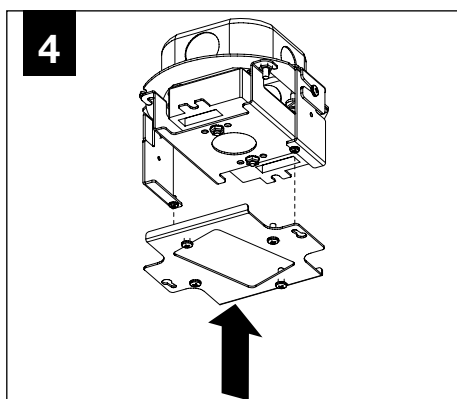
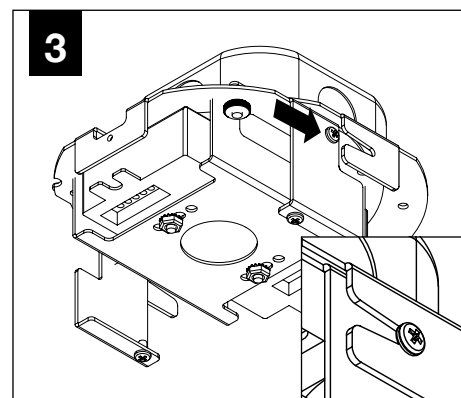
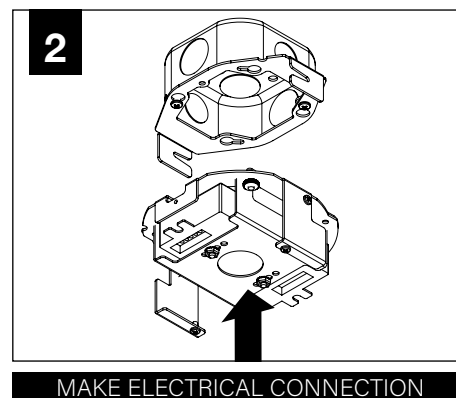
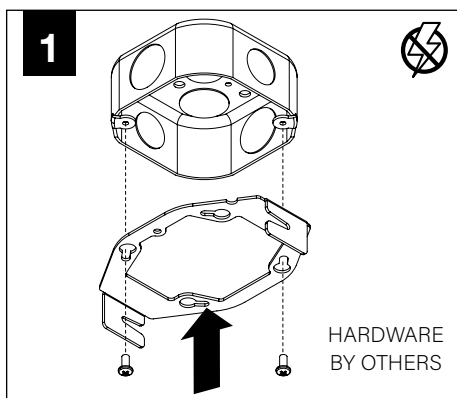


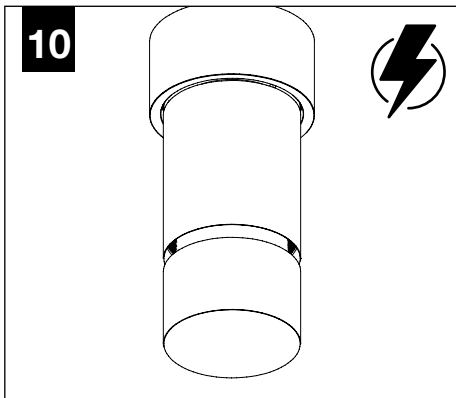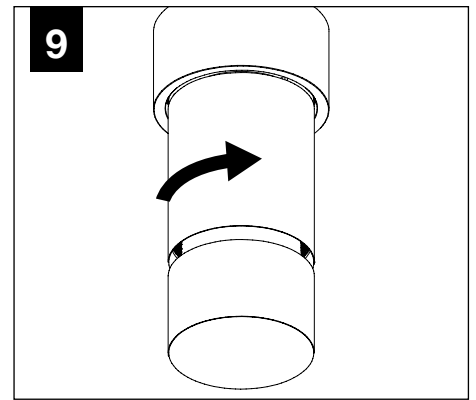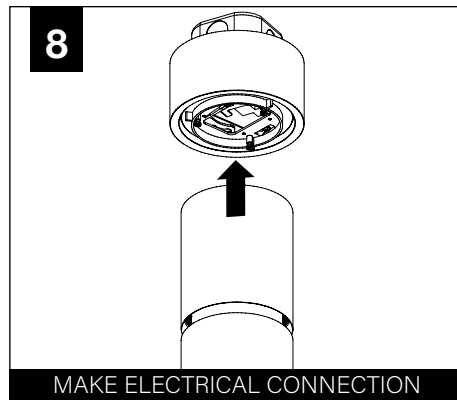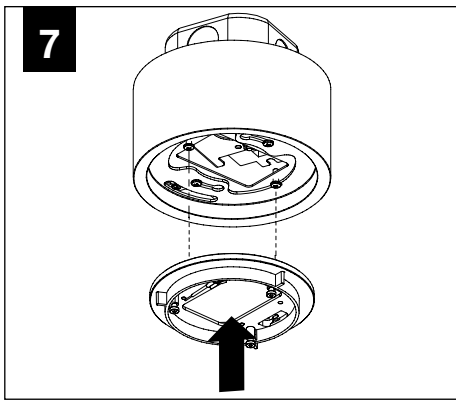

DRIVER SERVICE

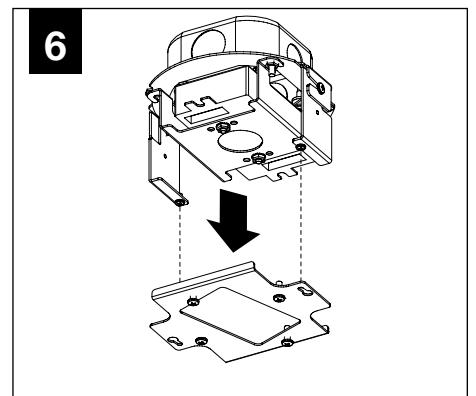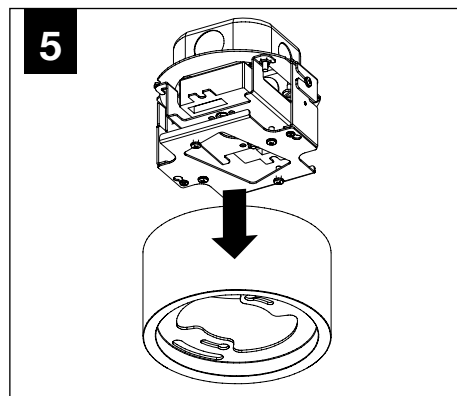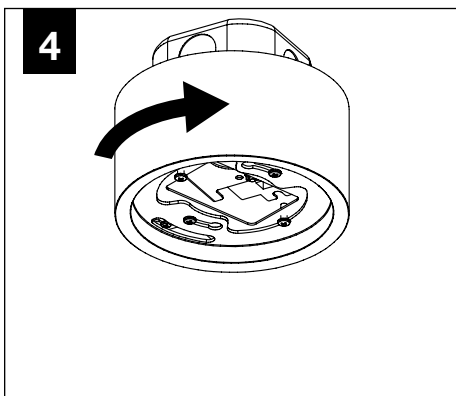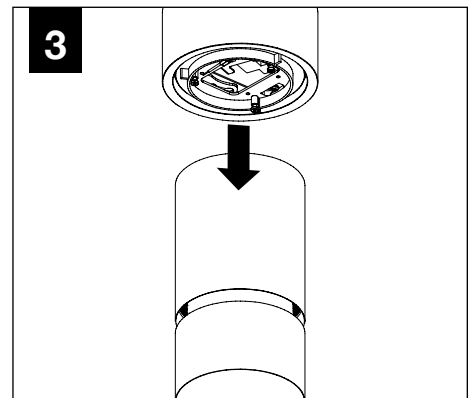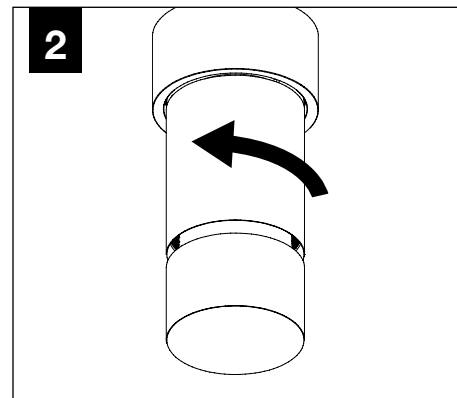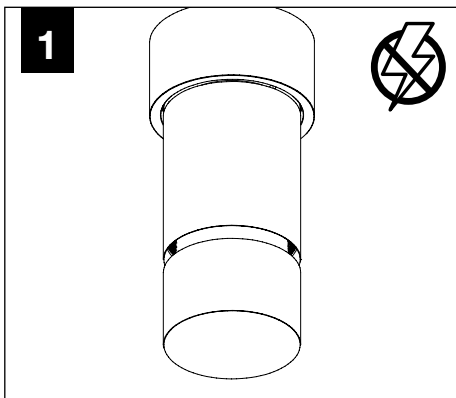

OPTIC SERVICE

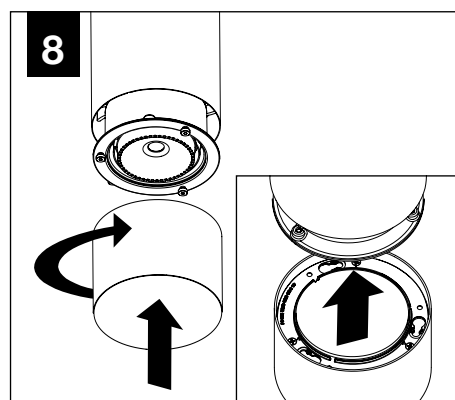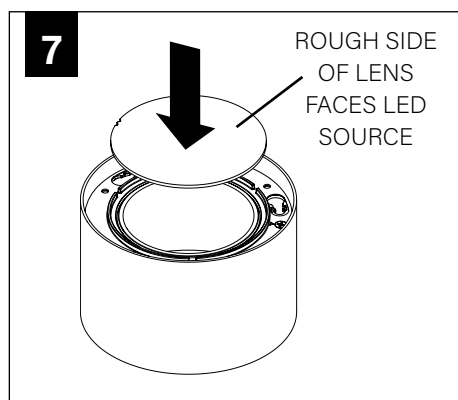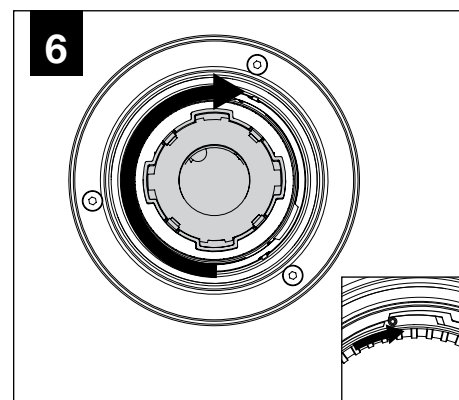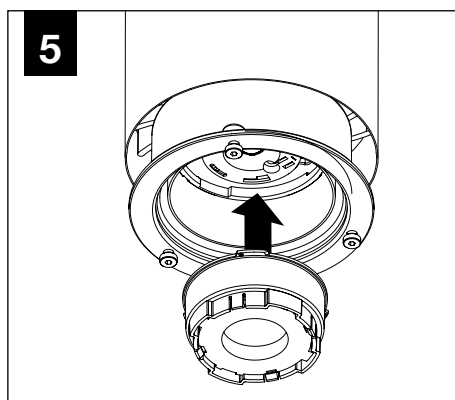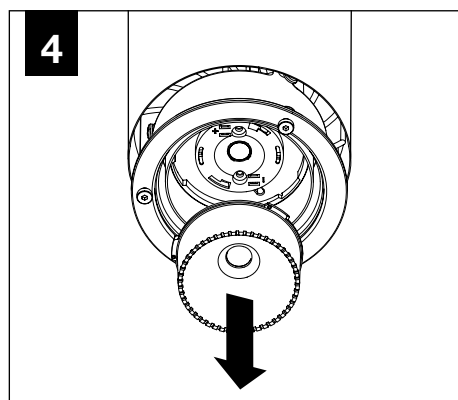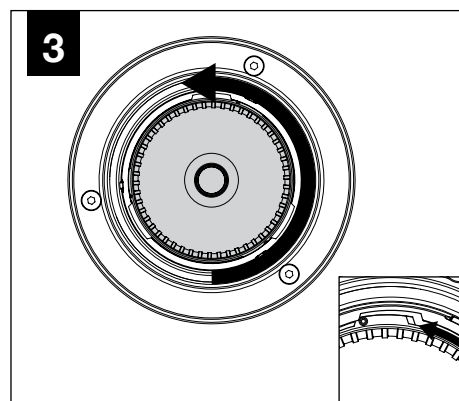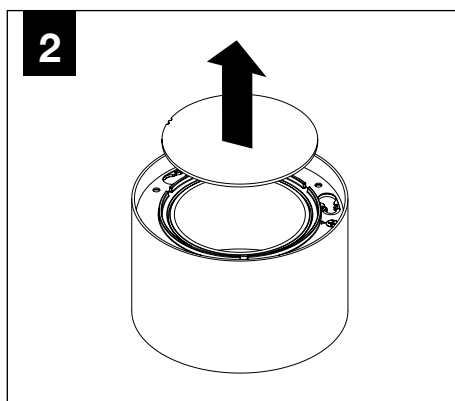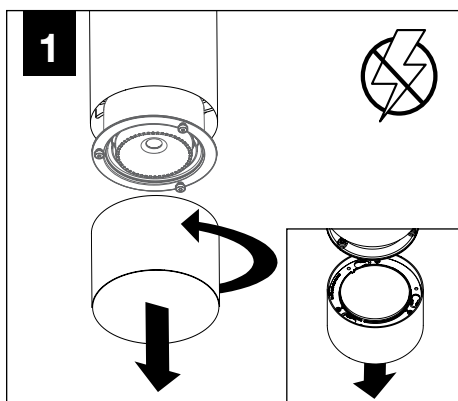

EMERGENCY




SEE BATTERY MANUFACTURER
INSTRUCTIONS

EMERGENCY MAXIMUM MOUNTING HEIGHT:
3.5" CYLINDERS - 16.98'
4.5" CYLINDERS - 16'


1

HARDWARE
BY OTHERS

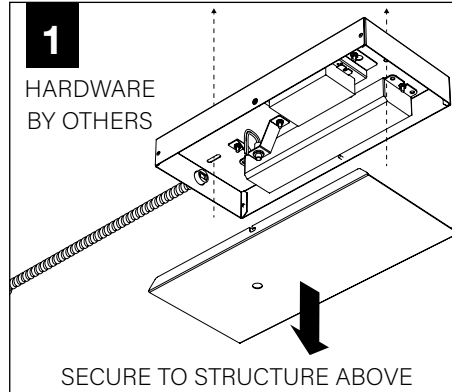


SECURE TO STRUCTURE ABOVE

2

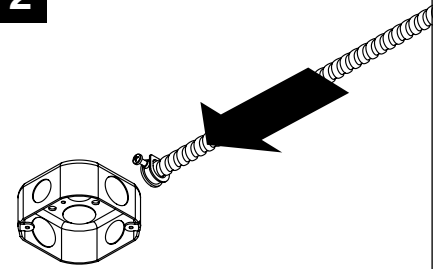


MAKE ELECTRICAL CONNECTION

3

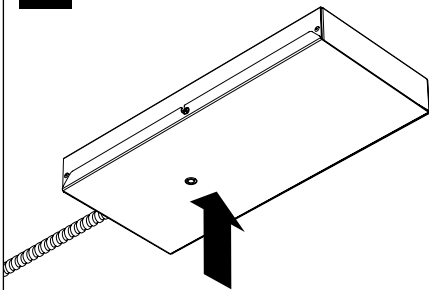

4

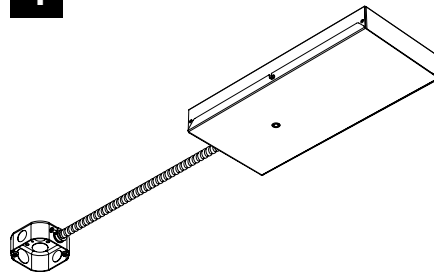

PROCEED TO
LUMINAIRE INSTALLATION