ID+ Cylinder - Stem Mount

FLCY2 | FLCY3 | FLCY4 - Power Canopy

BEFORE YOU BEGIN

- Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
- To prevent electrical shock, disconnect electrical supply before installation or servicing.
- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.

INSTRUCTION KEY



ATTENTION




SEE ADDITIONAL INSTRUCTIONS



POWER OFF



POWER ON

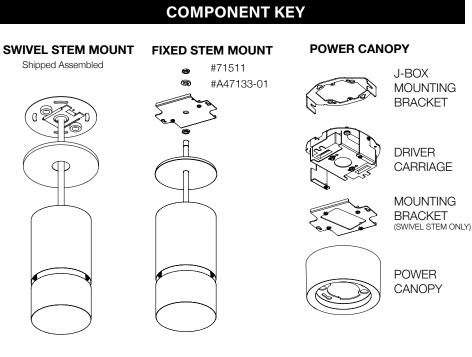

DECORATIVE POWER CANOPY







J-BOX MOUNTING BRACKET

DRIVER

CARRIAGE



₽₽



MOUNTING


BRACKET (SWIVEL STEM ONLY)


POWER

CANOPY


4" OCTAGONAL J-BOX REQUIRED EMERGENCY **SWIVEL STEM** J-BOX BY OTHERS 1.56" 3.55" 39.6mm 90.2mm 30° -l} PRIOR TO LUMINAIRE INSTALLATION, 00 \cap SEE PAGE 6 FOR EMERGENCY INSTALLATION INSTRUCTIONS. omm 2 MAXIMUM CEILING SLOPE: 30°


DECORATIVE POWER CANOPY

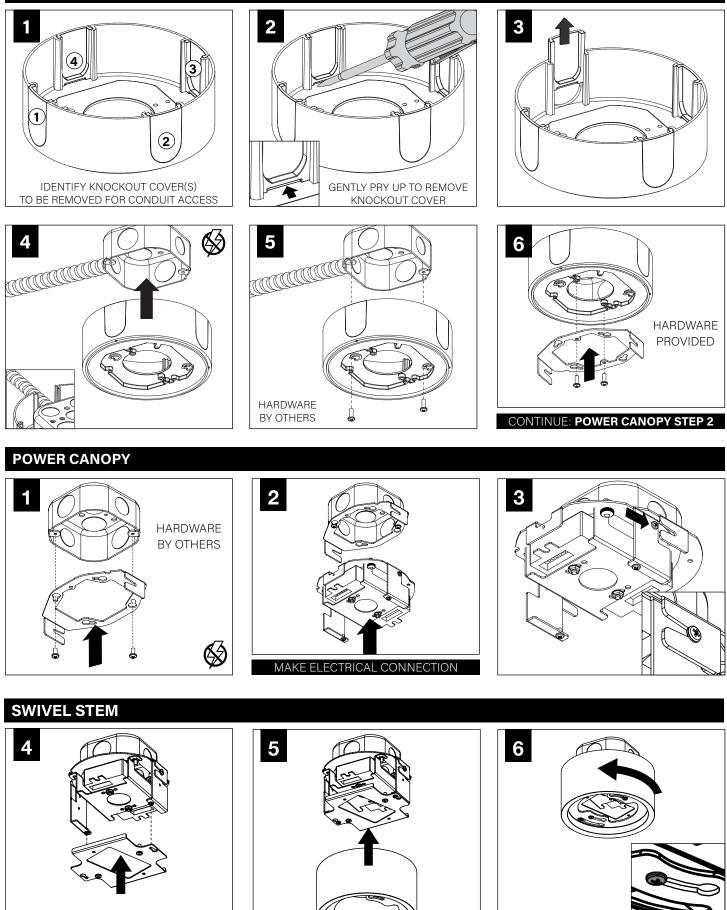

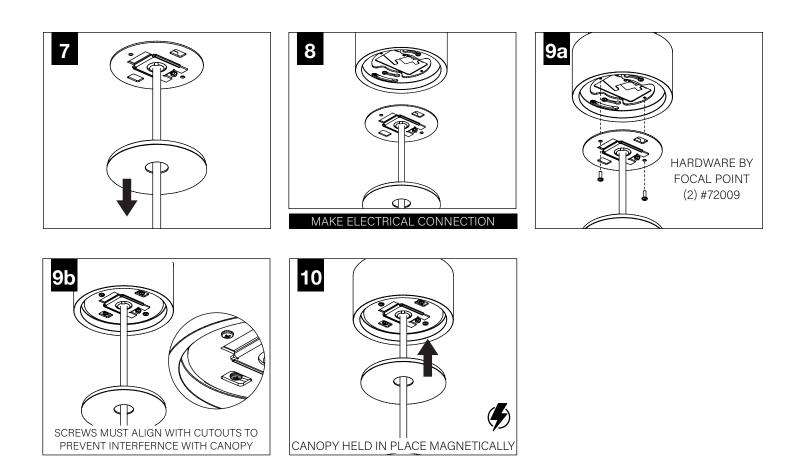


FIXED STEM

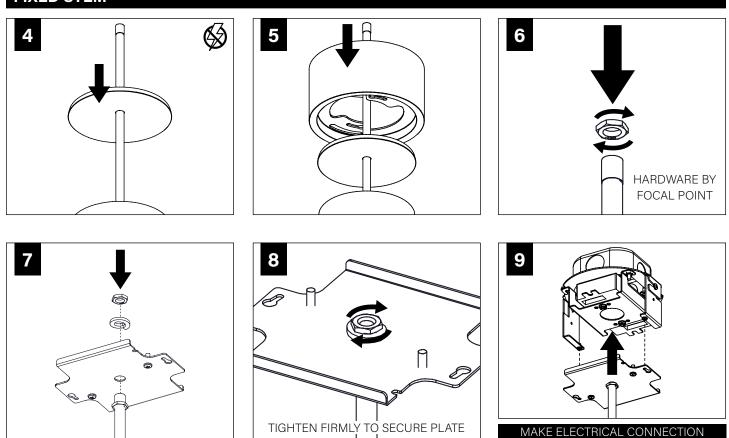


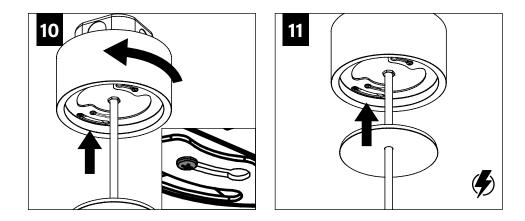


FLCY2 / FLCY3 / FLCY4 - FIXED STEM DRIVER SERVICE

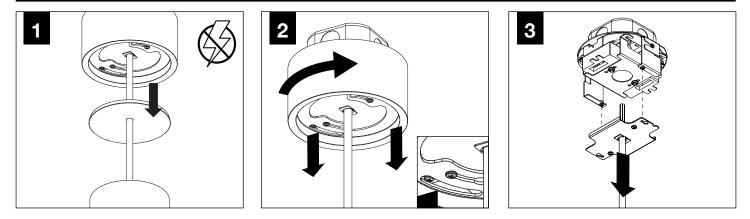


FLCY2 / FLCY3 / FLCY4 - SWIVEL STEM DRIVER SERVICE

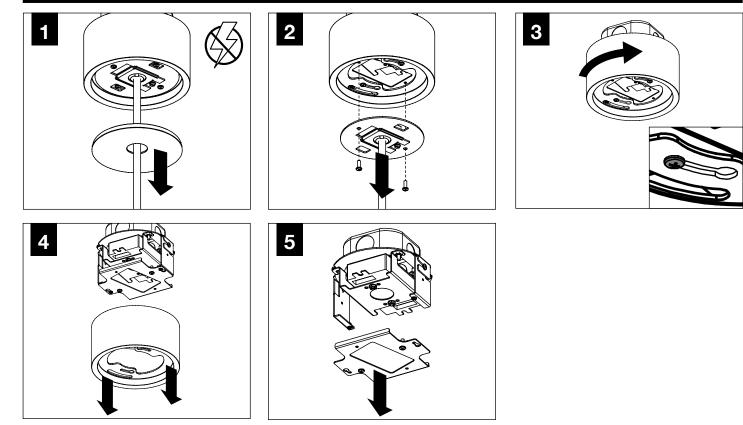



FLCY2 - OPTIC SERVICE

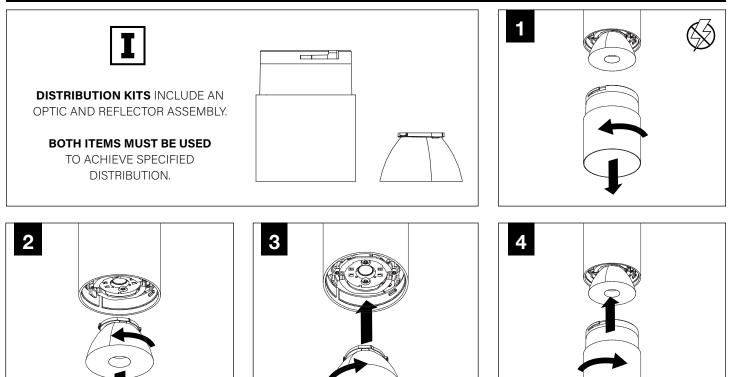


FLCY2 - WALL WASH AIMING







FLCY3 / FLCY4 - OPTIC SERVICE

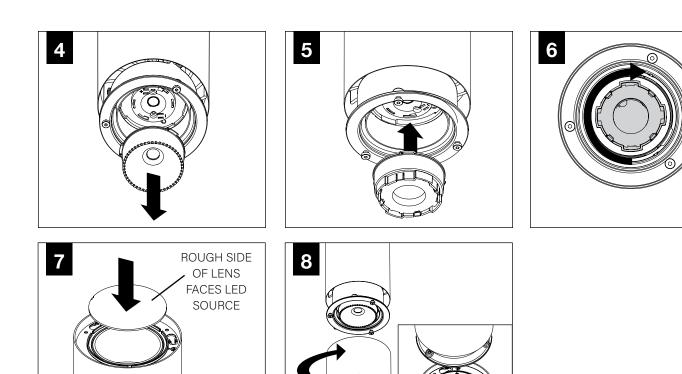



EMERGENCY





SEE BATTERY MANUFACTURER INSTRUCTIONS

EMERGENCY MAXIMUM MOUNTING HEIGHT: 2" CYLINDERS - 14.5' 3.5" CYLINDERS - 16.98' 4.5" CYLINDERS - 16'











PROCEED TO LUMINAIRE INSTALLATION