

ID+ 2.5" x 2.5"

LED DOWNLIGHT



clear diffuse
reflector



matte black
reflector



warm diffuse
reflector



white trim



titanium silver trim




bronze trim



black trim

DIMENSIONAL DATA

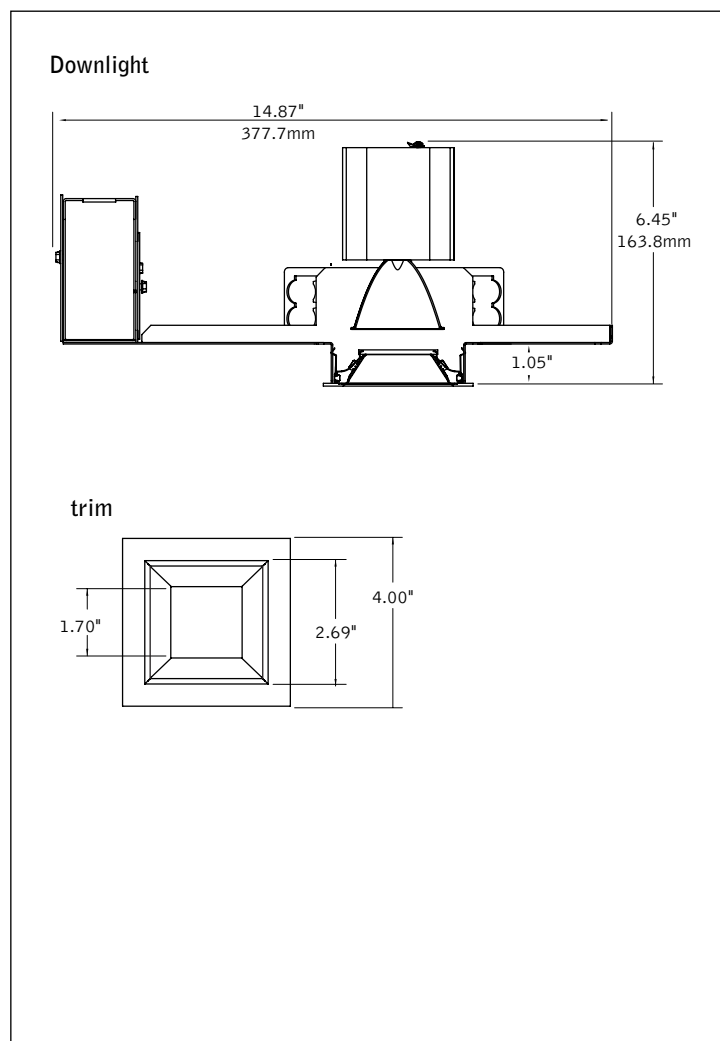

FEATURES

Small aperture LED fixed downlight.


15° beam is ideal for art and object accenting, additional Beamspreads up to 60° complement any application.

Selection of dimming drivers available.


Selection of trim styles and finishes to complement any design.

Adjustable accent & wall wash also available.

PERFORMANCE

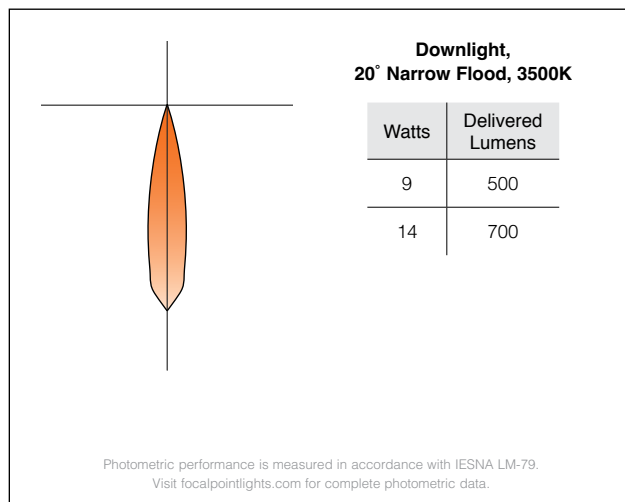

HOUSING DETAILS

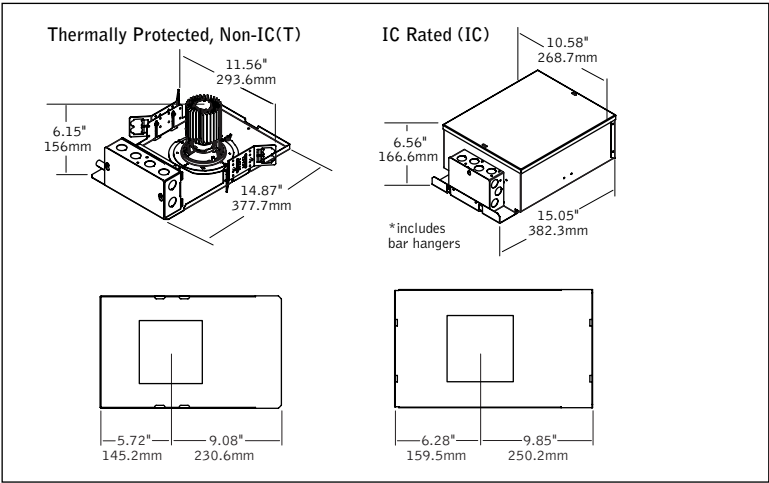

HOUSING SPECIFICATIONS

Construction
Die-formed housing and integral junction box with (7) 1/2" pry outs. Accommodates ceiling thicknesses up to 1". For thicker ceiling consult factory. Die-cast aluminum heat sink designed for maximum thermal dissipation. Fixture will not exceed 5 lb.

(T) Thermally protected housing for new construction. Insulation to be kept 3" away from housing. Butterfly brackets allow mounting to 1/2" emt. Order bar hangers as an accessory.

(IC) Insulated ceiling housing for new construction drywall/hard ceiling applications with direct insulation contact. Bar hangers included. Overlap and flush wall wash housing complies with ASTM E-283, air-tight energy codes.

Electrical
Choice of constant current dimming drivers. Power factor >.9 typical, 50/60 Hz., 350-2080mA.

Emergency battery
Bodine BSL17C-C2. Emergency output—7 watts for 90 minutes.

Labels
UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Lumen Maintenance
Reported: L70 at >36,000 hours
Derived from EPA TM-21 calculator.

Reliability
At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty
LED System rated for operation in ambient environments up to 25°C. 5 year limited warranty.

TRIM SPECIFICATIONS

LED System
Proprietary LED module with color accuracy within 2 SDCM.

Aesthetics
Parabolic reflector cone ensures glare free optics. Field-paintable flange. Trim clips pull trim tight to the ceiling.

Optics
Beamspreads achieved with optical filters.

PERFORMANCE CHART

See Page 3

HOUSING ORDERING

Housing Series		FLS22D
ID+ 2.5" Square Housing	FLS22	
Trim Type		
Square Flush	SF	
Square Overlap	SO	
Lumen Output		
500 Lumens	500L	
700 Lumens	700L	
Voltage		
120V	120	
277V	277	
Driver		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Lutron H-Series - 1% Dimming	LH1	
Lutron 5-Series - 5% EcoSystem Digital (700L only)	LU5	
DALI - 1% Dimming	D11	
Lutron A-Series - Forward Phase (120 only)	LTE	
Housing Type		
Thermally Protected, Non-IC	T	
IC Rated (500L only)	IC	
Factory Options		
Bar Hangers (T housing only)	BH	
Chicago Plenum / National Plenum (IC housing only)	CP	
Emergency Battery Pack (Remote test switch, above ceiling access, T housing & SO trim only)	EM	
TRIM & LED MODULE		
Aperture		LS22
2.5" Square Aperture	LS22	
Trim Type		SQ
Square	SQ	
Color Temperature		
2700K, 90+ CRI	927K	
3000K, 90+ CRI	930K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		DN
Downlight	DN	
Distribution		
15° Spot	SP	
20° Narrow Flood	NFL	
40° Flood	FL	
60° Wide Flood	WFL	
Reflector Color		
Clear Diffuse	CD	
Matte Black	BK	
Warm Diffuse	WD	
Flange Finish		
White	WH	
Black	BK	
Titanium Silver	TS	
Bronze	BR	
ACCESSORIES		
(One kit included per order as indicated in Distributon above. Order additional kits to change distribution in the field as needed.)		
15° Spot Kit	LS22-SPK	
20° Narrow Flood Kit	LS22-NFLK	
40° Flood Kit	LS22-FLK	
60° Wide Flood Kit	LS22-WFLK	

PERFORMANCE CHART

Delivered Lumens	System Watts	Distribution	Beamspread	Center Beam Candlepower (CBCP)
500L	9	SP	15°	2457
	9	NFL	20°	3008
	9	FL	40°	617
	9	WFL	60°	550
700L	14	SP	15°	3510
	14	NFL	20°	4224
	14	FL	40°	882

*Tested with 3500K Clear Diffuse Reflector. **Lumen output may vary +/- 5%. 0.963 Matte Black Reflector (BK) lumen multiplier. LU5 performance: WFL = 400L, SP & FL = 515L.