

luna[®] led

FLUL 1x4 | 2x2 | 2x4


CONNECTED[™]
SOLUTIONS

PL Preferred Light
Experience BETTER COLOR




FOCAL POINT[®]







⚠ AVOID ALL CONTACT WITH LED SURFACE, LEDs ARE EASILY DAMAGED!

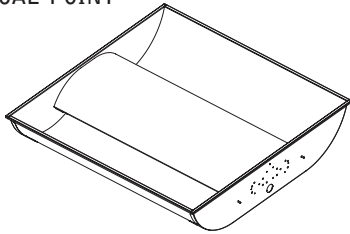FOCAL POINT






KEY

-  POWER OFF
-  POWER ON
-  ATTENTION

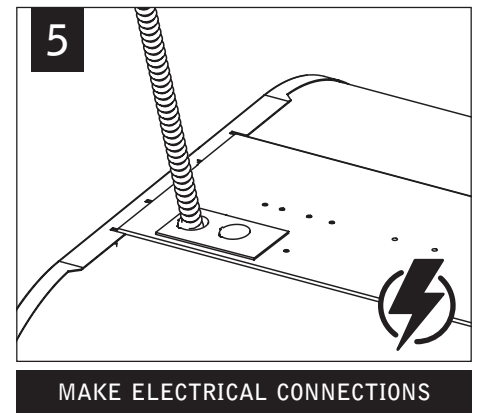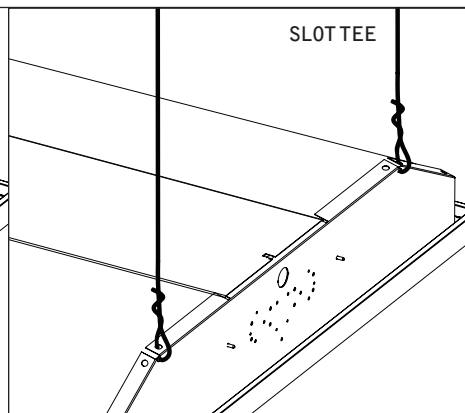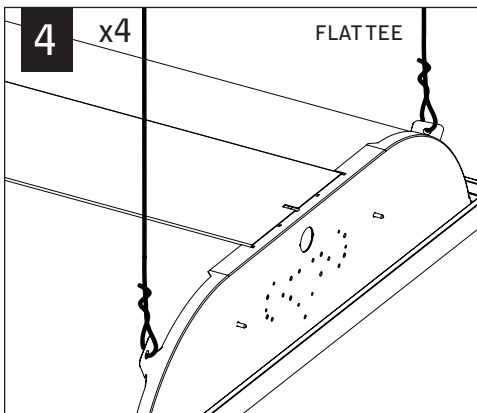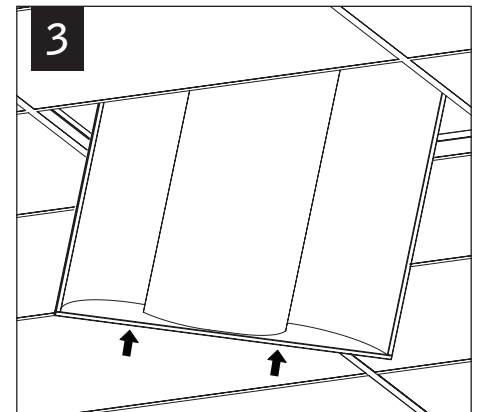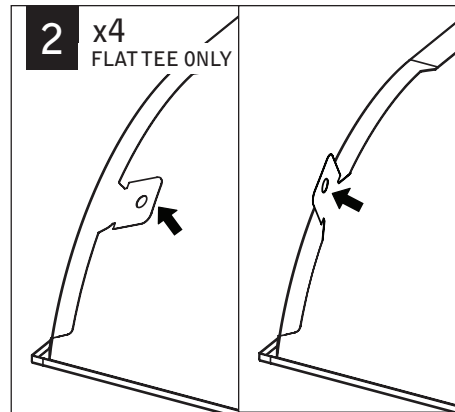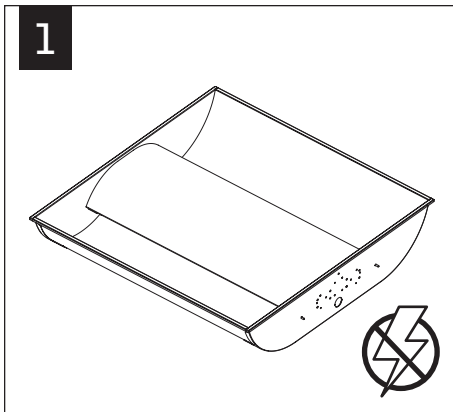


MAKE ELECTRICAL CONNECTIONS

DRYWALL INSTALLATION

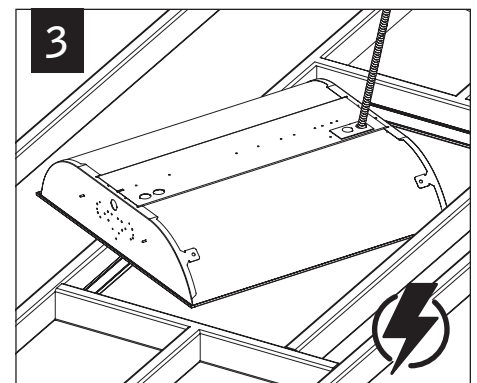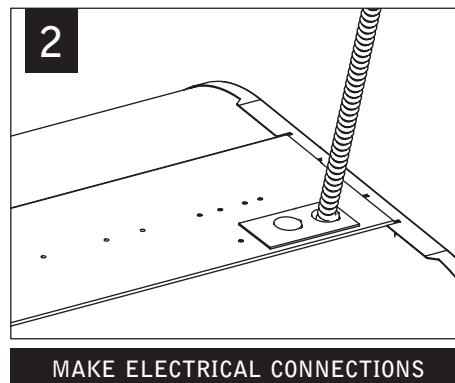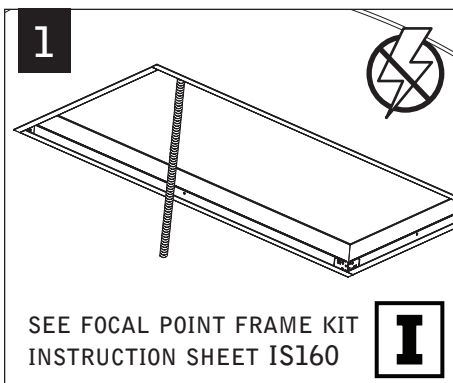


Fixtures must be installed by a qualified electrician (check with local and national codes for proper installation).
To prevent electrical shock, disconnect electrical supply before installation or servicing.

SERVICE

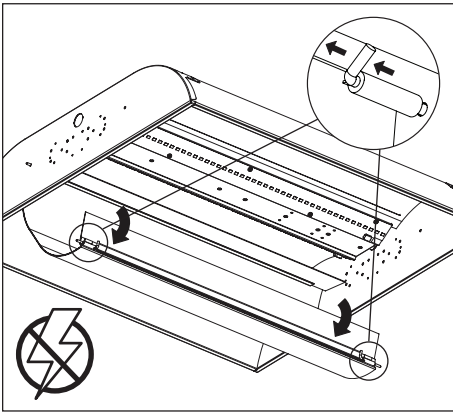


2 REMOVE DRIVER COVER

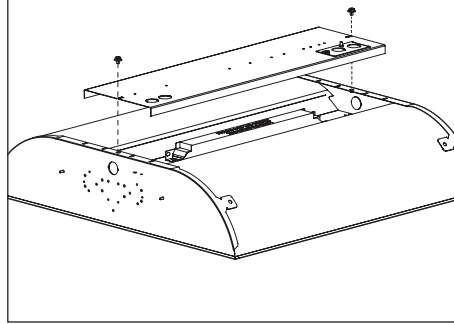

POSITIONAL CLIPS (OPTIONAL)

FOLLOW FOCAL POINT
INSTRUCTIONS FOR
POSITIONAL CLIP
INSTALLATION.
SEE IS138

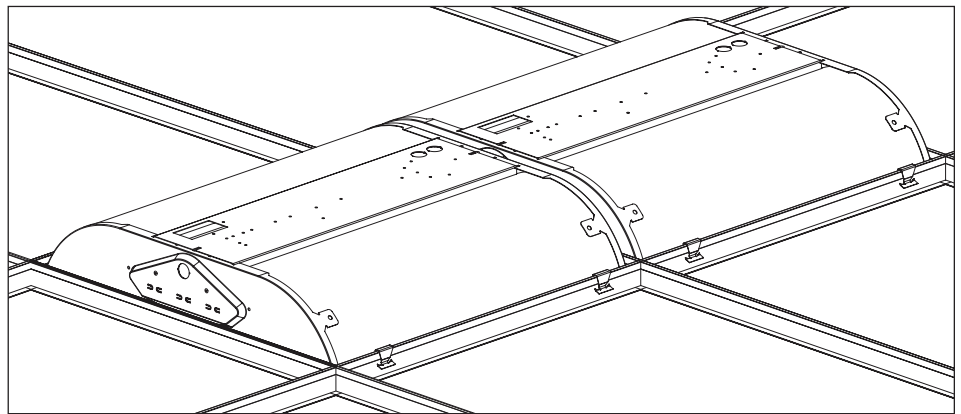

EMERGENCY









SEE BATTERY MANUFACTURER
INSTRUCTIONS

EMERGENCY MAXIMUM MOUNTING HEIGHT:
24.00'

Fixtures must be installed by a qualified electrician (check with local and national codes for proper installation).
To prevent electrical shock, disconnect electrical supply before installation or servicing.

ACUITY nLIGHT

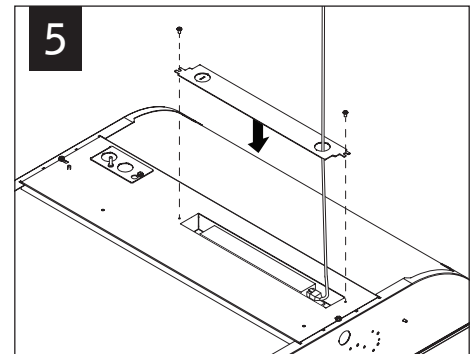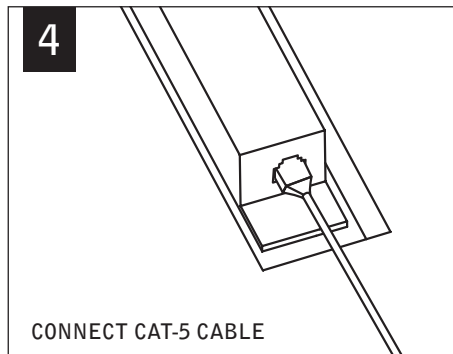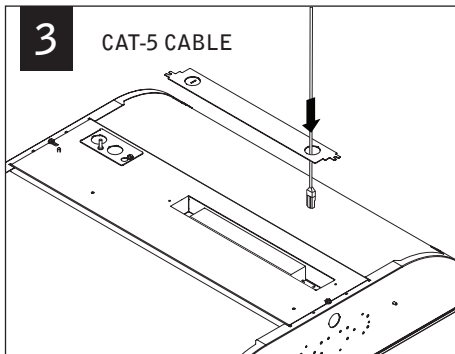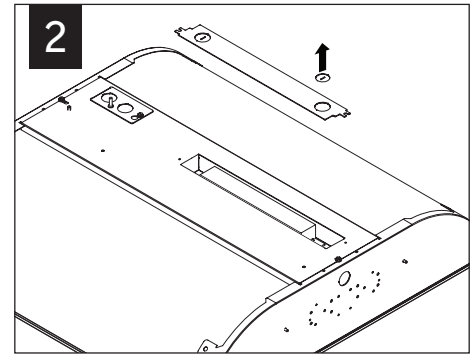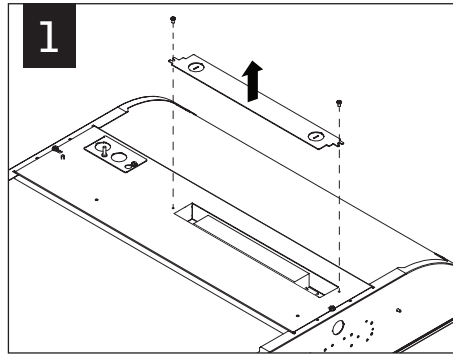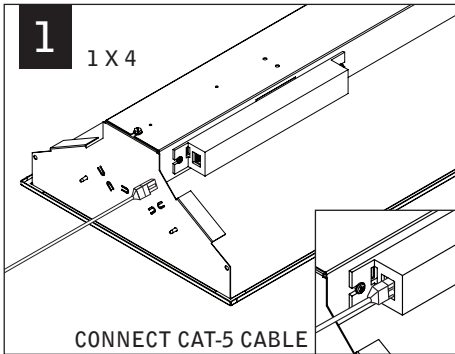

WATTSTOPPER

