Seem[®] 1 Point Source

Grid Ceiling | FSM1D


(PL) Preferred Light


COMPONENT KEY




BEFORE YOU BEGIN

- Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
- To prevent electrical shock, disconnect electrical supply before installation or servicing.
- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.

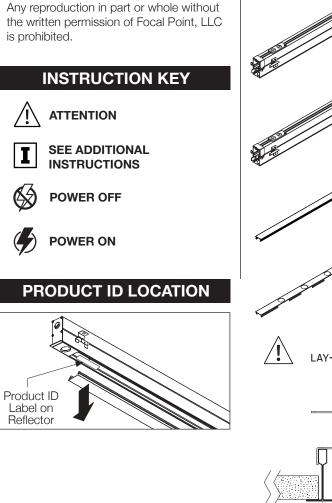

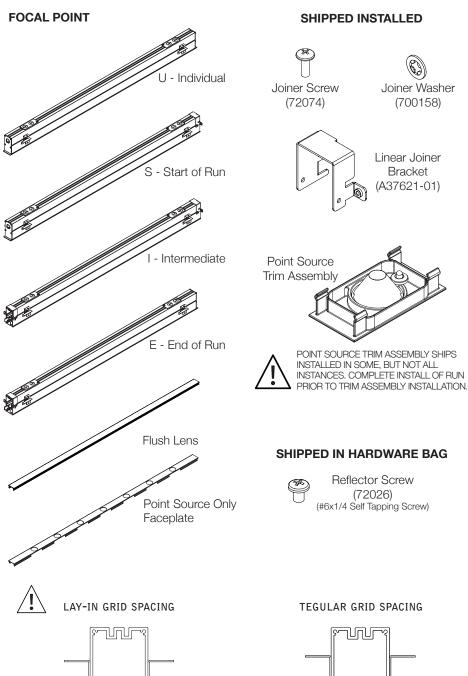



IS0739 REV. B

2.125"


53.9 mm


ſ


RAIL & CLIP GUIDE

<u>/</u>!

CHECK RAIL & CLIP POSITIONS BEFORE INSTALLATION. ARROWS INDICATE SCREW POSITIONS. TO CHANGE IN THE FIELD REMOVE AND REINSTALL ACCORDING TO DIAGRAMS BELOW.








G1: STD 15/16" Lay-In Tile G2: STD 9/16" Lay-In Tile


G4: Tall 15/16" Lay-In Tile G5: Tall 9/16" Lay-In Tile

G3: 9/16" Slot-Tee Tegular Tile T1: STD 15/16" Tegular Tile T2: STD 9/16" Tegular Tile T4: Tall 15/16" Tegular Tile T5: Tall 9/16" Tegular Tile T6: 9/16" Node Tegular Tile


STD = 1-1/2" Tee Height, Tall = 1-11/16" Tee Height

A INDIVIDUAL INSALLATIONS FOLLOW STEPS 1, 2 & 6

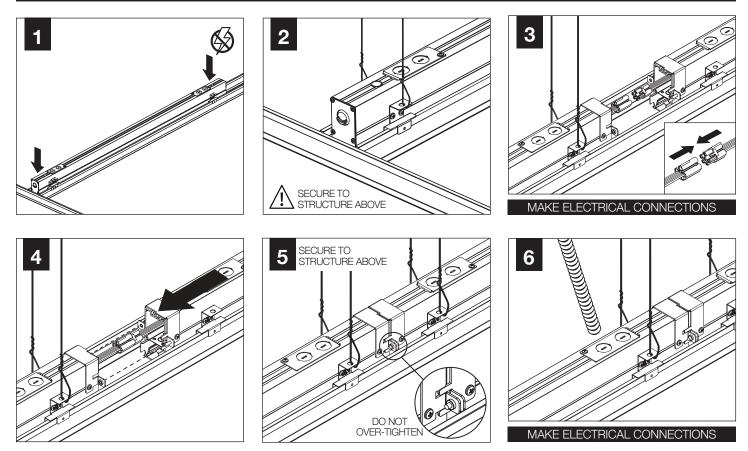



DRIVER SERVICE - INTEGRATED POINT SOURCE

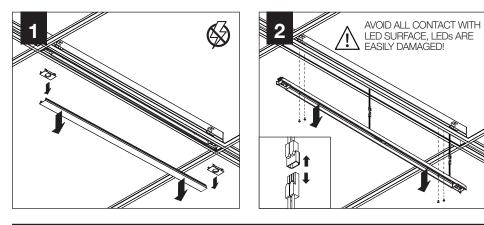

DRIVER SERVICE - POINT SOURCE ONLY

