



Seem® 1 Point Source


LED DIRECT



Intermediate point source detail



Black finish




Surface Mount option



6" spacing



12" spacing




Direct/Indirect companions



Recessed companions

DIMENSIONAL DATA

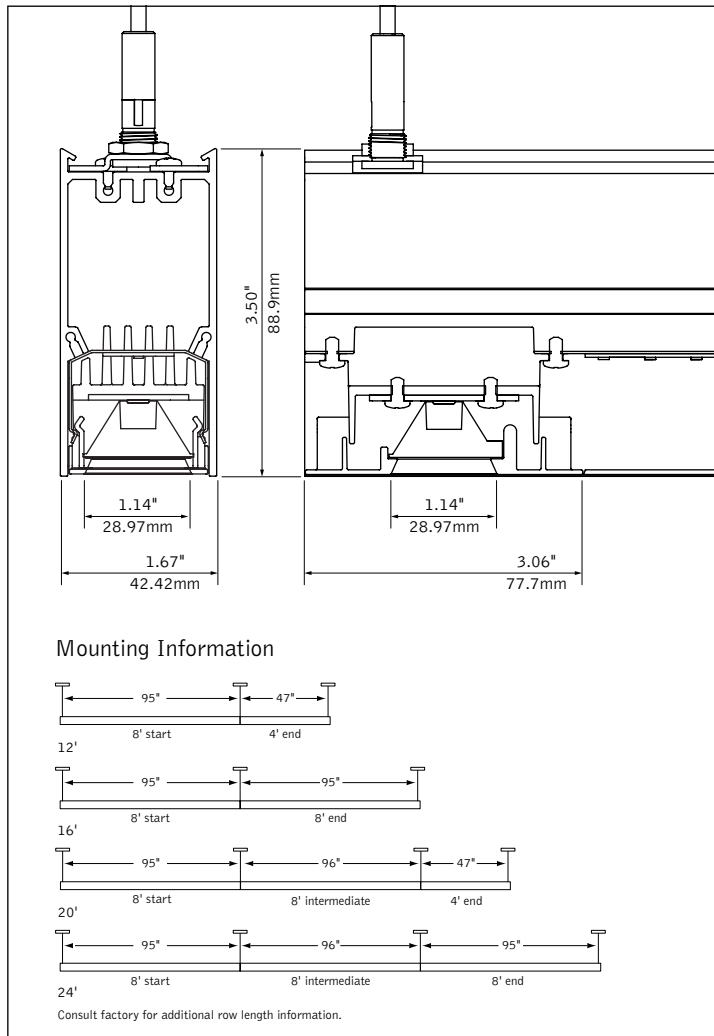

FEATURES

Narrow extruded aluminum nominal 1.5" linear direct illumination with integrated point source downlights.


Individual units and continuous runs in 1' increments.

Frosted acrylic lenses provide uninterrupted illumination, without pixels or shadows.

LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.

Choice of output levels and light distributions to meet a wide variety of application needs.

DISTRIBUTIONS

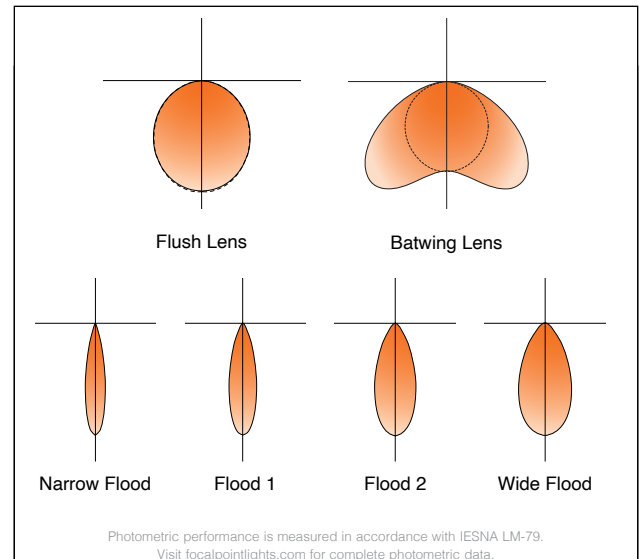

project:

PSE - Start and end of run

Diagram illustrating the start and end of run for PSE (Passive Seismic Evaluation) at various spacings (4', 8', 12', 15', 24'). The diagram shows a horizontal line representing the run, with markers indicating the start and end points for each spacing. The 4' spacing shows a single marker at the start. The 8' spacing shows markers at the start and end. The 12' spacing shows markers at the start, middle, and end. The 15' spacing shows markers at the start, middle, and end. The 24' spacing shows markers at the start, middle, and end.

PS4 - Nominal 4ft spacing across run

Diagram illustrating the nominal 4ft spacing across run for PS4 (Passive Seismic Evaluation) at various spacings (8', 12', 16', 24'). The diagram shows a horizontal line representing the run, with markers indicating the nominal 4ft spacing across the run. The 8' spacing shows markers at the start, middle, and end. The 12' spacing shows markers at the start, middle, and end. The 16' spacing shows markers at the start, middle, and end. The 24' spacing shows markers at the start, middle, and end.

PS5 - Nominal 5ft spacing across run

Diagram illustrating the nominal 5ft spacing across run for PS5 (Passive Seismic Evaluation) at various spacings (10', 15'). The diagram shows a horizontal line representing the run, with markers indicating the nominal 5ft spacing across the run. The 10' spacing shows markers at the start, middle, and end. The 15' spacing shows markers at the start, middle, and end.

PS6 - Nominal 6ft spacing across run

Diagram illustrating the nominal 6ft spacing across run for PS6 (Passive Seismic Evaluation) at various spacings (12', 18', 24'). The diagram shows a horizontal line representing the run, with markers indicating the nominal 6ft spacing across the run. The 12' spacing shows markers at the start, middle, and end. The 18' spacing shows markers at the start, middle, and end. The 24' spacing shows markers at the start, middle, and end.

PS8 - Nominal 8ft spacing across run

Diagram illustrating the nominal 8ft spacing across run for PS8 (Passive Seismic Evaluation) at various spacings (16', 24'). The diagram shows a horizontal line representing the run, with markers indicating the nominal 8ft spacing across the run. The 16' spacing shows markers at the start, middle, and end. The 24' spacing shows markers at the start, middle, and end.

PS06 - 6" Nominal on-center spacing

Diagram illustrating the 6" nominal on-center spacing for PS06 (Passive Seismic Evaluation) at various spacings (4', 8', 12'). The diagram shows a horizontal line representing the run, with markers indicating the 6" nominal on-center spacing across the run. The 4' spacing shows markers at the start, middle, and end. The 8' spacing shows markers at the start, middle, and end. The 12' spacing shows markers at the start, middle, and end.

PS12 - 12" Nominal on-center spacing

Diagram illustrating the 12" nominal on-center spacing for PS12 (Passive Seismic Evaluation) at various spacings (4', 8', 12'). The diagram shows a horizontal line representing the run, with markers indicating the 12" nominal on-center spacing across the run. The 4' spacing shows markers at the start, middle, and end. The 8' spacing shows markers at the start, middle, and end. The 12' spacing shows markers at the start, middle, and end.

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with both 80 and 90 CRI options. LED modules and drivers are replaceable from below. Color accuracy <3 SDCM.

One piece extruded aluminum housing. Cast aluminum end caps. 8' unit weight: 18.5lbs.

Reflectors fabricated of 22 Ga. steel finished in High Reflectance White powder coat.
Extruded acrylic lens .07" thick with frosted finish, up to 8' continuous.

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Power factor > .9.

Emergency output - 10 watts for 90 minutes. See EM/EC Guide for default locations and ordering details.

UL and cUL Listed. Suitable for Dry or Damp Locations, indoor use only.

Polyester powder coat applied over a multi-stage pre-treatment.

Reported: L70 at >61,000 hours	Calculated: L70 at 470,000 hours
L90 at >61,000 hours	L90 at 115,000 hours

Reported: L70 at >55,000 hours	Calculated: L70 at 226,000 hours
I 90 at 54,000 hours	I 90 at 54,000 hours

Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

See page 3.

Focal Point LLC reserves the right to change specifications for product improvement without notification.

ORDERING		
Luminaire Series		FSM1DS
Seem 1 LED Point Source		FSM1DS
Shielding		
Flush Lens		FL
Batwing Lens		BW
Point Source Only		PS
Point Source Spacing		
Start and End of Run		PSE
Nominal 4ft Spacing		PS4
Nominal 5ft Spacing		PS5
Nominal 6ft Spacing		PS6
Nominal 7ft Spacing		PS7
Nominal 8ft Spacing		PS8
Mixed Spacing		PSM
(See point source spacing guide for more options.)		
PS only	6" Nominal On-Center Spacing (250L & 350L only.)	PS06
	12" Nominal On-Center Spacing (Wider spacing available, consult factory.)	PS12
Point Source Lumens		
	250 Lumens (PS shielding only)	250L
	350 Lumens (Consult factory for Lutron with FL or BW shielding.)	350L
	450 Lumens	450L
Point Source Distribution		
	Narrow Flood	NFL
	Flood 1	FL1
	Flood 2	FL2
	Wide Flood	WFL
Linear Lumen Output		
PS only	No linear output, point source only	0LF
	125 Lumens per foot (5' minimum length. See spacing guide for PS4 limitations. Consult factory for Lutron.)	125LF
FL & BW only	250 Lumens per foot	250LF
	375 Lumens per foot	375LF
	500 Lumens per foot	500LF
	625 Lumens per foot	625LF
Color Temperature		
	2700K, 80CRI or 90 CRI	27K or 927K
	3000K, 80CRI or 90 CRI	30K or 930K
	3500K, 80CRI or 90 CRI	35K or 935K
	4000K, 80CRI or 90 CRI	40K or 940K
Circuit		
	Single Circuit	1C
	Dual Circuit (FL & BW shielding only)	2C
Voltage		
	120/277 UNV Volt	UNV
	347 Volt (LD1 driver only)	347
Control System & Dimming Level		
	0-10V - 10% Dimming	LD1
	0-10V - 1% Dimming	L11
Lutron Hi-Lume EcoSystem (LDE1) -	1% Dimming	LH1
Lutron 5-Series EcoSystem (LDE5) -	5% Dimming	LU5
Mounting		
	24" Cable Suspension	C24_
	48" Cable Suspension	C48_
	96" Cable Suspension	C96_
(Specify canopy color White (WH), Black (BK) or Titanium Silver (TS). Example: C24WH.)		
(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)		
	Surface Mount	SM
Factory Options		
	Black Cord	BKCD
	Emergency Circuit	_EC
(Direct linear only on FL & BW shielding)		
	Emergency Battery Pack	_EM
(5' minimum length for FL & BW shielding. 4' minimum length for PS shielding. See EM/EC Guide for default locations and ordering details.)		
Finish		
	Black	BK
	Titanium Silver	TS
	Matte White Housing	WH
Luminaire Length		
	Specify luminaire/row length in 1' increments	_ft
(4' minimum. Smaller increments available, consult factory.)		

PERFORMANCE CHART (4' LINEAR AREA)

Shielding	Lumens per Foot	Delivered Lumens	Tested System Watts	LPW
Flush Lens / Batwing Lens	125LF	500	6	75
	250LF	1000	10	98
	375LF	1500	15	104
	500LF	2000	19	106
	625LF	2500	24	103

Based on 3500K, 4' lengths. Lumen Multipliers: Preferred Light = 0.65, 90 CRI = 0.87 Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%

PERFORMANCE CHART (POINT SOURCE)

Per Point Source					PS06		PS12		PSE			
					4' Luminaire				4-8' Luminaires		> 8' Luminaires	
					Distribution	Beamspread	Point Source Lumens	Delivered Lumens	Tested System Watts	LPW	Tested System Watts	LPW
	Narrow Flood (NFL)	21°	250L	258	21	87	10	77	-	-	-	-
			350L	360	30	84	14	80	10	74	12	61
			450L	457	-	-	17	81	12	76	14	66
	Flood 1 (FL1)	28°	250L	254	21	86	10	76	-	-	-	-
			350L	354	30	83	14	78	10	73	12	60
			450L	450	-	-	17	79	12	75	14	66
	Flood 2 (FL2)	42°	250L	249	21	84	10	74	-	-	-	-
			350L	346	30	81	14	77	10	71	12	59
			450L	441	-	-	17	78	12	73	14	65
	Wide Flood (WFL)	53°	250L	242	21	82	10	72	-	-	-	-
			350L	337	30	79	14	75	10	69	12	57
			450L	429	-	-	17	75	12	71	14	63

Based on 3500K. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%

7 point sources

3 point sources


2 point sources

Seem® 1 Point Source


POINT SOURCE SPACING GUIDE

ON-CENTER SPACING EXAMPLES


PS4 - Nominal 4ft spacing across run




PS5 - Nominal 5ft spacing across run



PS6 - Nominal 6ft spacing across run




PS8 - Nominal 8ft spacing across run



MIXED SPACING EXAMPLES

PSM - Mixed spacing across run. Point sources located at start and end of run as well as housing joints.



Luminaire Run Length (ft)	Run Configuration	Point Source Spacing Code	Total # Point Sources	Luminaire Run Length (ft)	Run Configuration	Point Source Spacing Code	Total # Point Sources
8	8'	PS4	3	30	5' + 5' + 5' + 5' + 5' + 5'	PS5	7
9	-	-	-	30	6' + 6' + 6' + 6' + 6'	PS6	6
10	5' + 5'	PS5	3	31	6' + 6' + 7' + 6' + 6'	PSM	6
11	-	-	-	32	8' + 8' + 8' + 8'	PS4	9
12	8' + 4'	PS4*	4	32	8' + 8' + 8' + 8'	PS8	5
12	6' + 6'	PS6	3	33	6' + 7' + 7' + 7' + 6'	PSM	6
13	4' + 5' + 4'	PSM*	4	34	7' + 7' + 6' + 7' + 7'	PSM	6
14	7' + 7'	PS7	3	35	5' + 5' + 5' + 5' + 5' + 5' + 5'	PS5	8
15	5' + 5' + 5'	PS5	4	35	7' + 7' + 7' + 7' + 7'	PS7	6
16	8' + 8'	PS4	5	36	8' + 8' + 8' + 8' + 4'	PS4*	10
16	8' + 8'	PS8	3	36	6' + 6' + 6' + 6' + 6' + 6'	PS6	7
17	6' + 5' + 6'	PSM	4	37	8' + 7' + 7' + 7' + 8'	PSM	6
18	6' + 6' + 6'	PS6	4	38	8' + 8' + 6' + 8' + 8'	PSM	6
19	6' + 7' + 6'	PSM	4	39	8' + 8' + 7' + 8' + 8'	PSM	6
20	8' + 8' + 4'	PS4*	6	40	8' + 8' + 8' + 8' + 8'	PS4	11
20	5' + 5' + 5' + 5'	PS5	5	40	8' + 8' + 8' + 8' + 8'	PS8	6
20	7' + 6' + 7'	PSM	4	40	5' + 5' + 5' + 5' + 5' + 5' + 5' + 5'	PS5	9
21	7' + 7' + 7'	PS7	4	41	6' + 6' + 6' + 5' + 6' + 6' + 6'	PSM	8
22	7' + 8' + 7'	PSM	4	42	6' + 6' + 6' + 6' + 6' + 6' + 6'	PS6	8
23	8' + 7' + 8'	PSM	4	42	7' + 7' + 7' + 7' + 7' + 7'	PS7	7
24	8' + 8' + 8'	PS4	7	43	6' + 6' + 6' + 7' + 6' + 6' + 6'	PSM	8
24	8' + 8' + 8'	PS8	4	44	8' + 8' + 8' + 8' + 8' + 4'	PS4*	12
24	6' + 6' + 6' + 6'	PS6	5	45	5' + 5' + 5' + 5' + 5' + 5' + 5' + 5' + 5'	PS5	10
25	5' + 5' + 5' + 5' + 5'	PS5	6	46	7' + 8' + 8' + 8' + 8' + 7'	PSM	7
26	7' + 6' + 6' + 7'	PSM	5	47	6' + 5' + 5' + 5' + 5' + 5' + 5' + 5' + 6'	PSM	10
27	6' + 5' + 5' + 5' + 6'	PSM	6	48	8' + 8' + 8' + 8' + 8' + 8'	PS4	13
28	8' + 8' + 8' + 4'	PS4*	8	48	8' + 8' + 8' + 8' + 8' + 8'	PS8	7
28	7' + 7' + 7' + 7'	PS7	5	48	6' + 6' + 6' + 6' + 6' + 6' + 6' + 6'	PS6	9
29	6' + 6' + 5' + 6' + 6'	PSM	6	>48	Consult Factory	-	-


*Not available with 125LF.

Seem® 1 Point Source


POINT SOURCE ONLY SPACING GUIDE

ON-CENTER SPACING EXAMPLES

PS06 - 6" Nominal on-center spacing



PS12 - 12" Nominal on-center spacing



Luminaire Run Length (ft)	Run Configuration	Point Source Spacing Code	Total # Point Sources
4	4	PS06	7
5	5	PS06	9
6	6	PS06	11
7	7	PS06	13
8	8	PS06	15
9	5 + 4	PS06	17
10	6 + 4	PS06	19
11	7 + 4	PS06	21
12	8 + 4	PS06	23
13	8 + 5	PS06	25
14	8 + 6	PS06	27
15	8 + 7	PS06	29
16	8 + 8	PS06	31
17	8 + 5 + 4	PS06	33
18	8 + 6 + 4	PS06	35
19	8 + 7 + 4	PS06	37
20	8 + 8 + 4	PS06	39
21	8 + 8 + 5	PS06	41
22	8 + 8 + 6	PS06	43
23	8 + 8 + 7	PS06	45
24	8 + 8 + 8	PS06	47
25	8 + 8 + 5 + 4	PS06	49
26	8 + 8 + 6 + 4	PS06	51
27	8 + 8 + 7 + 4	PS06	53
28	8 + 8 + 8 + 4	PS06	55
29	8 + 8 + 8 + 5	PS06	57
30	8 + 8 + 8 + 6	PS06	59
31	8 + 8 + 8 + 7	PS06	61
32	8 + 8 + 8 + 8	PS06	63
33	8 + 8 + 8 + 5 + 4	PS06	65
34	8 + 8 + 8 + 6 + 4	PS06	67
35	8 + 8 + 8 + 7 + 4	PS06	69
36	8 + 8 + 8 + 8 + 4	PS06	71
37	8 + 8 + 8 + 8 + 5	PS06	73
38	8 + 8 + 8 + 8 + 6	PS06	75
39	8 + 8 + 8 + 8 + 7	PS06	77
40	8 + 8 + 8 + 8 + 8	PS06	79
41	8 + 8 + 8 + 8 + 5 + 4	PS06	81
42	8 + 8 + 8 + 8 + 6 + 4	PS06	83
43	8 + 8 + 8 + 8 + 7 + 4	PS06	85
44	8 + 8 + 8 + 8 + 8 + 4	PS06	87
45	8 + 8 + 8 + 8 + 8 + 5	PS06	89
46	8 + 8 + 8 + 8 + 8 + 6	PS06	91
47	8 + 8 + 8 + 8 + 8 + 7	PS06	93
48	8 + 8 + 8 + 8 + 8 + 8	PS06	95
>48	Consult Factory	-	-

Luminaire Run Length (ft)	Run Configuration	Point Source Spacing Code	Total # Point Sources
4	4	PS12	3
5	5	PS12	4
6	6	PS12	5
7	7	PS12	6
8	8	PS12	7
9	5 + 4	PS12	8
10	6 + 4	PS12	9
11	7 + 4	PS12	10
12	8 + 4	PS12	11
13	8 + 5	PS12	12
14	8 + 6	PS12	13
15	8 + 7	PS12	14
16	8 + 8	PS12	15
17	8 + 5 + 4	PS12	16
18	8 + 6 + 4	PS12	17
19	8 + 7 + 4	PS12	18
20	8 + 8 + 4	PS12	19
21	8 + 8 + 5	PS12	20
22	8 + 8 + 6	PS12	21
23	8 + 8 + 7	PS12	22
24	8 + 8 + 8	PS12	23
25	8 + 8 + 5 + 4	PS12	24
26	8 + 8 + 6 + 4	PS12	25
27	8 + 8 + 7 + 4	PS12	26
28	8 + 8 + 8 + 4	PS12	27
29	8 + 8 + 8 + 5	PS12	28
30	8 + 8 + 8 + 6	PS12	29
31	8 + 8 + 8 + 7	PS12	30
32	8 + 8 + 8 + 8	PS12	31
33	8 + 8 + 8 + 5 + 4	PS12	32
34	8 + 8 + 8 + 6 + 4	PS12	33
35	8 + 8 + 8 + 7 + 4	PS12	34
36	8 + 8 + 8 + 8 + 4	PS12	35
37	8 + 8 + 8 + 8 + 5	PS12	36
38	8 + 8 + 8 + 8 + 6	PS12	37
39	8 + 8 + 8 + 8 + 7	PS12	38
40	8 + 8 + 8 + 8 + 8	PS12	39
41	8 + 8 + 8 + 8 + 5 + 4	PS12	40
42	8 + 8 + 8 + 8 + 6 + 4	PS12	41
43	8 + 8 + 8 + 8 + 7 + 4	PS12	42
44	8 + 8 + 8 + 8 + 8 + 4	PS12	43
45	8 + 8 + 8 + 8 + 8 + 5	PS12	44
46	8 + 8 + 8 + 8 + 8 + 6	PS12	45
47	8 + 8 + 8 + 8 + 8 + 7	PS12	46
48	8 + 8 + 8 + 8 + 8 + 8	PS12	47
>48	Consult Factory	-	-