

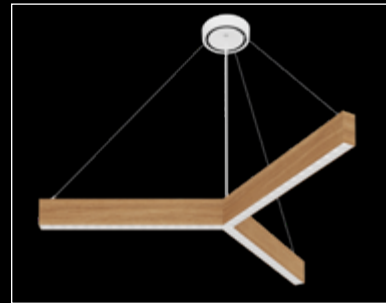


Seem® 1 Trio


LED DIRECT PENDANT

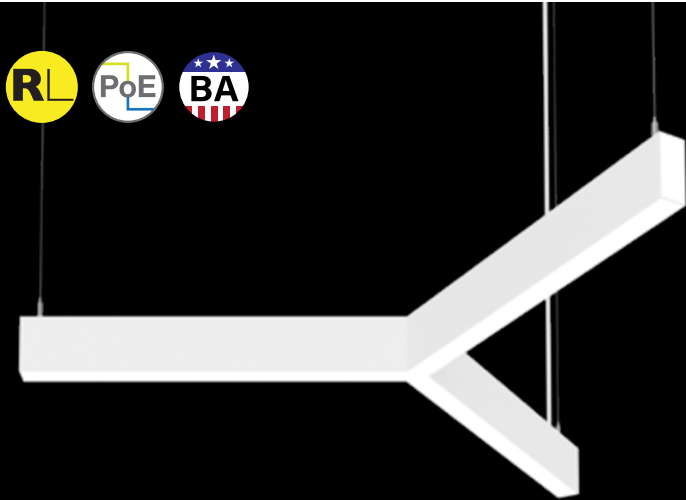

The Naturals Collection - Chestnut with Clear Specular louver shown




Lit end cap detail



Point Source ends detail




louver detail



Single point canopy detail

DIMENSIONAL DATA

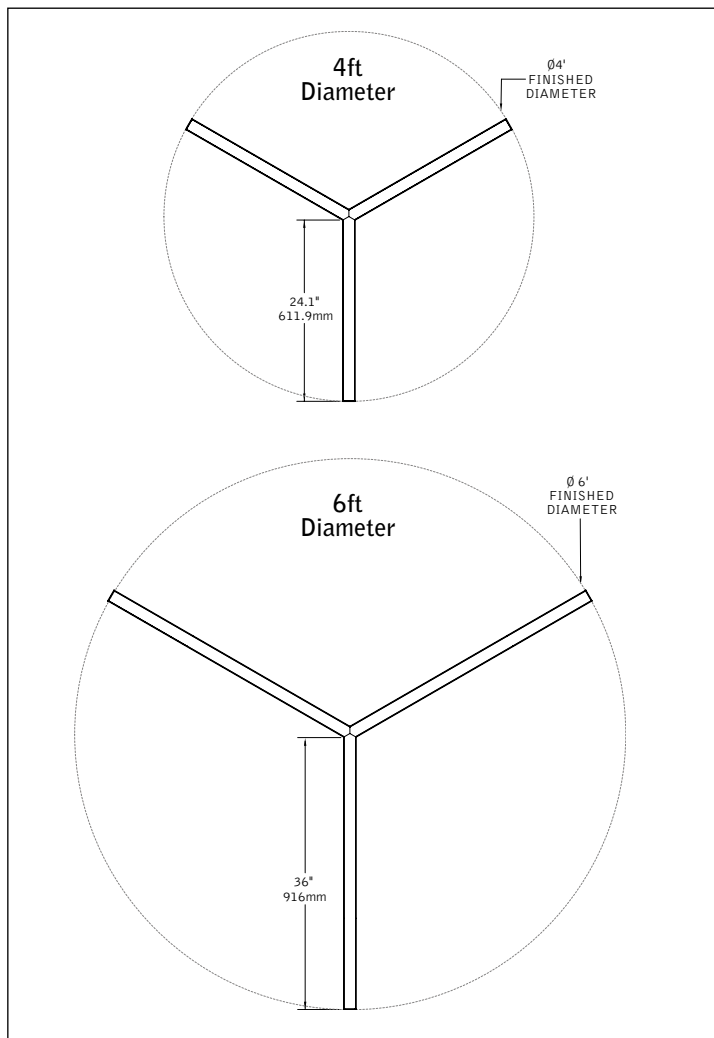

FEATURES

Narrow 1.5" extruded aluminum 'Y' shaped recessed LED luminaire with multiple shielding options.

Individual 4' or 6' diameter units in lens, louver or integrated point source downlight configurations.


Deeply regressed louver cells provide 60° cut-off from light source to promote visual comfort.

Choice of point source downlight output levels to meet a wide variety of application needs.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Available with The Naturals, a series of finishes that exude biophilic beauty.


DISTRIBUTIONS

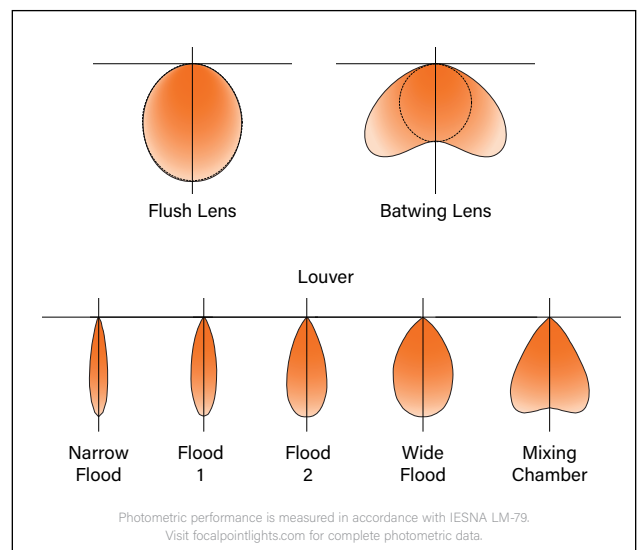

fixture:

project:

STANDARD LENS DIMENSIONAL DATA

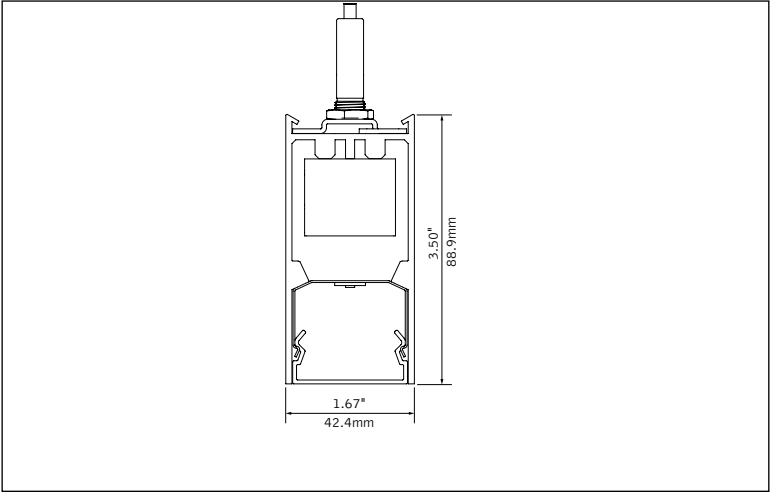

STANDARD LENS PERFORMANCE CHART

Size	Lumen Output	Tested System Watts	 BW		 FL	
			Delivered lumens	LPW	Delivered lumens	LPW
4'	750	9	810	87	767	92
	1500	15	1586	97	1503	102
	2250	23	2363	97	2240	103
	3000	30	3183	99	3017	105
	3750	37	3959	101	3753	106
6'	1125	12	1198	99	1135	93
	2250	23	2363	103	2240	97
	3375	34	3571	106	3385	100
	4500	44	4736	108	4489	103
	5625	55	5944	109	5634	103

Based on 3500K. Lumen multipliers: 90 CRI = 0.87. Delivered lumens may vary +/- 5%. Actual wattage may vary +/- 5%

LIT END CAP PERFORMANCE CHART

Lumen Output		Delivered Lumens Per End Cap	
4'	6'		
750	1125	28	
1500	2250	56	
2250	3375	83	
3000	4500	112	
3750	5625	139	

Based on 3500K. Lumen multipliers: 90 CRI = 0.87. Delivered lumens may vary +/- 5%. Actual wattage may vary +/- 5%



STANDARD LENS ORDERING

Luminaire Series		FSM1FP
Seem 1 Pendant	FSM1FP	
Profile		T
Trio		
Nominal Size		
4' Diameter (2' arms)	4	
6' Diameter (3' arms)	6	
Shielding		
Batwing Lens	BW	
Flush Lens	FL	
Lumen Output		
4' Diameter	750 Lumens	750L
	1500 Lumens	1500L
	2250 Lumens	2250L
	3000 Lumens	3000L
	3750 Lumens	3750L
6' Diameter	1125 Lumens	1125L
	2250 Lumens	2250L
	3375 Lumens	3375L
	4500 Lumens	4500L
	5625 Lumens	5625L
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI or 90+ CRI	40K or 940K	
Circuits		1C
Single Circuit		
Voltage		
120/277 UNV Volt	UNV	
347 Volt (LD1 driver only)	347	
Low Voltage		LV
Control System & Dimming Level		
0-10V - 10% Dimming	LD1	
0-10V - 1% Dimming	L11	
Low Voltage, PoE compatible (No driver. Not available with EM or EC. LV Voltage only.)	LVN	
Lutron Hi-Lume EcoSystem (LDE1) -		
1% Dimming	LH1	
DALI 1% Dimming	D11	
Mounting		
(Specify canopy color, see finishes page for options. The Naturals available with Multi-point suspension only. Example: White = J24WH.)		
48" Cable Single Suspension (Power cord at intersection CC or power cord at end CE)	CC48__ or CE48__	
96" Cable Single Suspension (Power cord at intersection CC or power cord at end CE)	CC96__ or CE96__	
24" Cable Multi-point Suspension	J24__	
48" Cable Multi-point Suspension	J48__	
96" Cable Multi-point Suspension (Consult factory for sloped ceiling applications.)	J96__	
Surface Mount		SM
Factory Options		
Black Cord	BKCD	
Lit End Caps (FL shielding only. Not available with The Naturals. Not recommended with Black housing.)	LE	
Emergency Circuit		EC
Emergency Battery Pack (120/277 Volt only.)		EM
Housing Finish		
(See finishes page for The Naturals options)		
Matte Black	BK	
Titanium Silver	TS	
Matte White	WH	


fixture:

project:


LOUVER DIMENSIONAL DATA

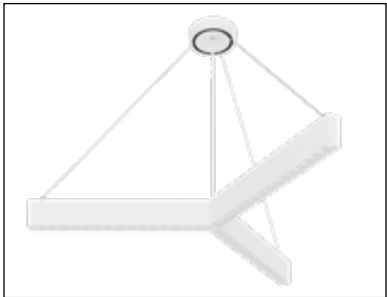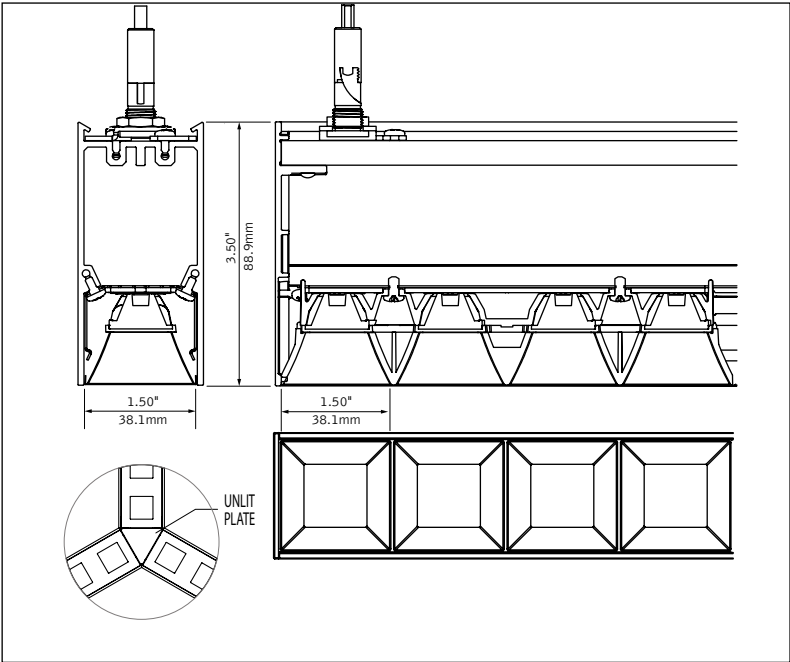

4' Single Canopy, Matte White housing and louver



Black Specular Louver



Matte Black Louver



Matte White Louver




Clear Diffuse Louver



Center detail







Emergency detail



Clear Specular Louver

LOUVER DISTRIBUTIONS

					
	NFL	FL1	FL2	WFL	LMC
Beam Spread	20°	29°	43°	67°	68°
Spacing Criteria	0.36	0.50	0.70	0.98	1.18

PERFORMANCE CHART

See page 6



LOUVER ORDERING

Luminaire Series		FSM1FP
Seem 1 Pendant	FSM1FP	
Profile		T
Trio		T
Nominal Size		
4' Diameter (2' arms)	4	
6' Diameter (3' arms)	6	
Shielding		LC
Louver only		LC
Lumen Output		
4' Diameter	1500 Lumens	1500L
	2250 Lumens	2250L
	3000 Lumens	3000L
	3750 Lumens	3750L
	4500 Lumens	4500L
	5250 Lumens	5250L
6' Diameter	6000 Lumens	6000L
	2250 Lumens	2250L
	3375 Lumens	3375L
	4500 Lumens	4500L
	5625 Lumens	5625L
	6750 Lumens	6750L
	7875 Lumens	7875L
	9000 Lumens	9000L
Color Temperature		
2700K, 80+ CRI or 90+ CRI		27K or 927K
3000K, 80+ CRI or 90+ CRI		30K or 930K
3500K, 80+ CRI or 90+ CRI		35K or 935K
4000K, 80+ CRI or 90+ CRI		40K or 940K
Circuits		1C
Single Circuit		1C
Voltage		
120/277 UNV Volt		UNV
347 Volt (LD1 driver only)		347
Low Voltage		LV
Control System & Dimming Level		
0-10V - 10% Dimming		LD1
0-10V - 1% Dimming		L11
Low Voltage, PoE compatible (No driver. Not available with EM or EC. LV Voltage only.)		LVN
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming		LH1
DALI 1% Dimming		D11
Mounting		
(Specify canopy color, see finishes page for options. The Naturals available with Multi-point suspension only. Example: White = J24WH.)		
48" Cable Single Suspension (Power cord at intersection CC or power cord at end CE)		CC48__ or CE48__
96" Cable Single Suspension (Power cord at intersection CC or power cord at end CE)		CC96__ or CE96__
24" Cable Multi-point Suspension		J24__
48" Cable Multi-point Suspension		J48__
96" Cable Multi-point Suspension (Consult factory for sloped ceiling applications.)		J96__
Surface Mount		SM
Louver Distribution		
Narrow Flood		NFL
Flood 1		FL1
Flood 2		FL2
Wide Flood		WFL
Louvered Mixing Chamber		LMC
Factory Options		
Black Cord		BKCD
Emergency Circuit		EC
Emergency Battery Pack (120/277 Volt only.)		EM
Louver Finish		
Matte Black		BK
Black Specular		BS
Clear Diffuse		CD
Clear Specular		CS
Matte White		WH
Housing & Faceplate Finish (See finishes page for The Naturals options)		
Matte Black		BK
Titanium Silver		TS
Matte White		WH

fixture:

project:

POINT SOURCE DIMENSIONAL DATA

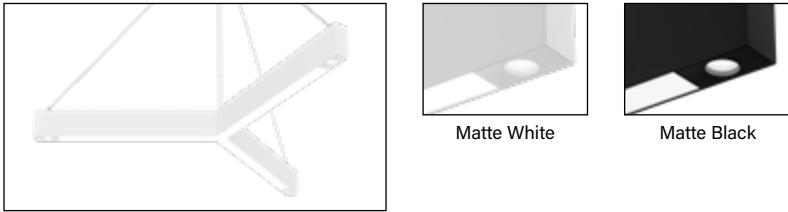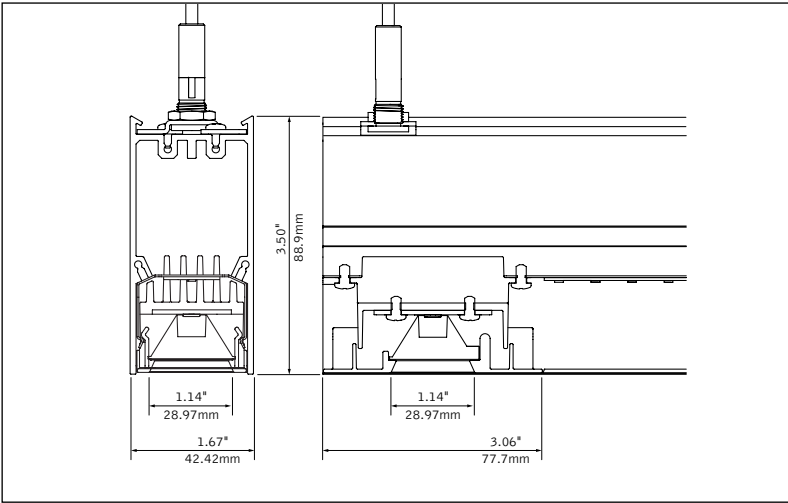

PERFORMANCE CHART (LENSED AREA)

Size	Lumen Output	Tested System Watts	BW		FL	
			Delivered lumens	LPW	Delivered lumens	LPW
4'	660	8	680	89	645	84
	1320	14	1414	101	1340	96
	1980	20	2104	105	1994	100
	2640	27	2794	104	2648	99
	3300	33	3485	105	3303	100
6'	1035	11	1112	97	1054	92
	2070	21	2190	106	2076	100
	3105	31	3269	105	3098	100
	4140	41	4347	106	4121	101
	5175	50	5469	109	5184	103

Based on 3500K. Lumen multipliers: 90 CRI = 0.87. Delivered lumens may vary +/- 5%. Actual wattage may vary +/- 5%

PERFORMANCE CHART (POINT SOURCE)

Distribution	Beamspread	Point Source Lumens	Delivered Lumens	Tested Watts	LPW
Narrow Flood (NFL)	21°	250L	258	3.4	76.9
		350L	360	4.5	79.6
		450L	457	5.7	80.5
Flood 1 (FL1)	28°	250L	254	3.4	75.6
		350L	354	4.5	78.3
		450L	450	5.7	79.2
Flood 2 (FL2)	42°	250L	249	3.4	74.1
		350L	346	4.5	76.7
		450L	441	5.7	77.5
Wide Flood (WFL)	53°	250L	242	3.4	72.1
		350L	337	4.5	74.6
		450L	429	5.7	75.5

Based on 3500K. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%

Focal Point LLC reserves the right to change specifications for product improvement without notification.

POINT SOURCE ORDERING

Luminaire Series		FSM1FP
Seem 1 Pendant	FSM1FP	
Profile		T
Trio	T	
Nominal Size		
4' Diameter (2' arms)	4	
6' Diameter (3' arms)	6	
Shielding		
Batwing Lens + Point Source Ends	BWPSE	
Flush Lens + Point Source Ends	FLPSE	
Point Source Lumens		
250 Lumens	250L	
350 Lumens	350L	
450 Lumens	450L	
Point Source Distribution		
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Lensed Lumen Output		
4' Diameter	660 Lumens	660L
	1320 Lumens	1320L
	1980 Lumens	1980L
	2640 Lumens	2640L
	3300 Lumens	3300L
6' Diameter	1035 Lumens	1035L
	2070 Lumens	2070L
	3105 Lumens	3105L
	4140 Lumens	4140L
	5175 Lumens	5175L
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI or 90+ CRI	40K or 940K	
Circuits		
Single Circuit	1C	
Dual Circuit	2C	
(Independent control of Lens & Point Source distributions)		
Voltage		
120/277 UNV Volt	UNV	
347 Volt (LD1 driver only)	347	
Low Voltage	LV	
Control System & Dimming Level		
0-10V - 10% Dimming	LD1	
0-10V - 1% Dimming	L11	
Low Voltage, PoE compatible	LVN	
(No driver. Not available with EM or EC. LV Voltage only.)		
Lutron Hi-Lume EcoSystem (LDE1) -		
1% Dimming	LH1	
DALI 1% Dimming	D11	
Mounting		
(Specify canopy color, see finishes page for options. The Naturals available with Multi-point suspension only. Example: White = J24WH.)		
48" Cable Single Suspension	CC48__ or CE48__	
(Power cord at intersection CC or power cord at end CE)		
96" Cable Single Suspension	CC96__ or CE96__	
(Power cord at intersection CC or power cord at end CE)		
24" Cable Multi-point Suspension	J24__	
48" Cable Multi-point Suspension	J48__	
96" Cable Multi-point Suspension	J96__	
(Consult factory for sloped ceiling applications.)		
Surface Mount	SM	
Factory Options		
Black Cord	BKCD	
Emergency Circuit	EC	
Emergency Battery Pack (120/277 Volt only)	EM	
Housing & Faceplate Finish		
Matte Black	BK	
Titanium Silver	TS	
Matte White	WH	

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with both 80 and 90 CRI options. 3500K and 4000K with CRI>90 have a cyanosis observation index (COI) of 3.3 or less. LED modules and drivers are replaceable from below. Color accuracy <3 SDCM.

Construction

Extruded aluminum housing. Cast aluminum end caps. Luminaire will not exceed 16lbs.

Optic

Reflectors fabricated of 22 Ga. steel finished in High Reflectance White powder coat. Extruded acrylic lens .07" thick with frosted finish. 60-degree cut-off to louvered light source and its image.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Power factor > .9. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires. PoE runs require an independent PoE node and power feed for each luminaire section.

Emergency Battery

Emergency output - 10 watts for 90 minutes. Maximum mounting height: 18.5ft.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment. Canopy and cord white as standard. The Naturals: 100% low VOC vinyl.

Lumen Maintenance

Lensed Source

Reported: L70 at >61,000 hours	Calculated: L70 at 470,000 hours
L90 at >61,000 hours	L90 at 115,000 hours

Louvered Sources

Reported: L70 at >54,000 hours	Calculated: L70 at 138,000 hours
L90 at 43,000 hours	L90 at 43,000 hours

Point Sources

Reported: L70 at >55,000 hours	Calculated: L70 at 226,000 hours
L90 at 54,000 hours	L90 at 54,000 hours

Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.


Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

MOUNTING DETAILS

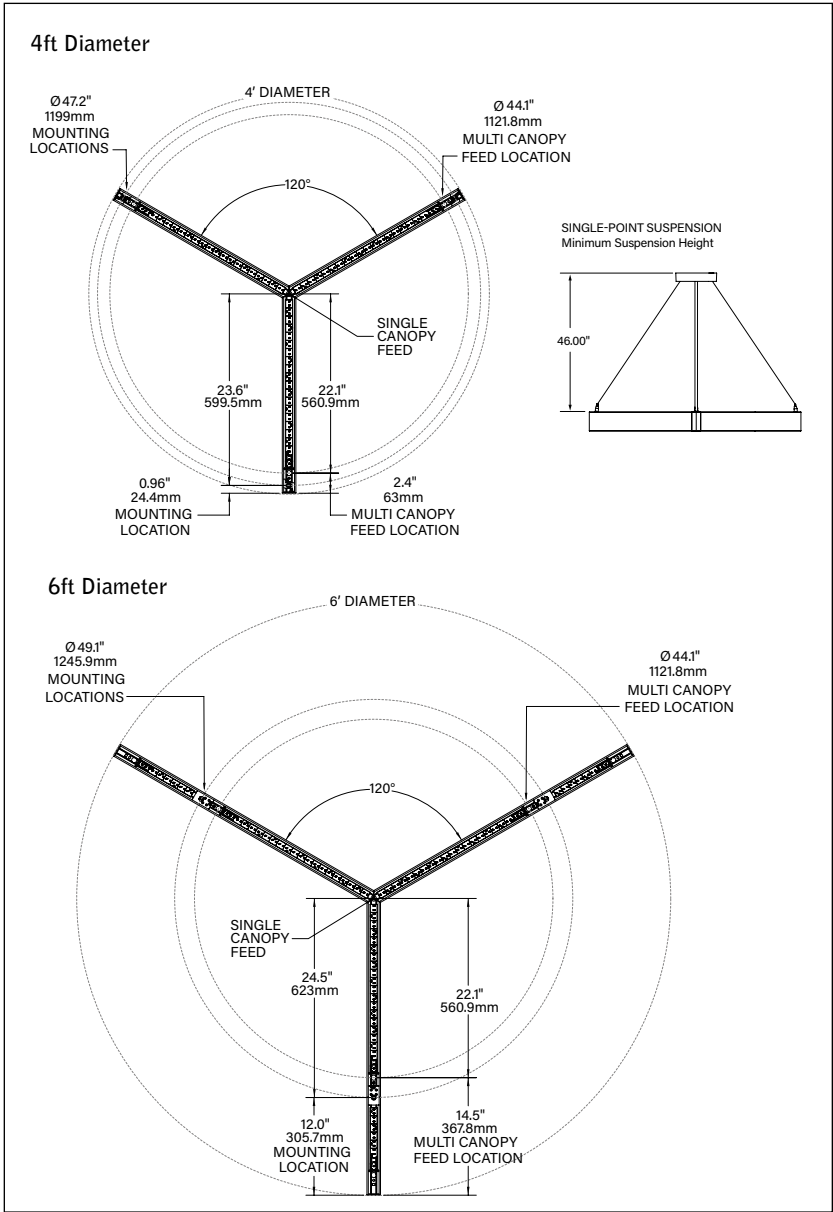

Declare.

Seem Linear Luminaires
Focal Point, LLC

Final Assembly: Chicago, IL, USA
Life Expectancy: 10 Year(s)
End of Life Options: Recyclable (55%), Landfill (45%)

Ingredients:

Aluminum Alloy 6063; UNS G10080 Steel Alloy; Small Electrical Components - RoHS Compliant¹; Copper; Polymethyl methacrylate; Steel; Poly[imino(1,6-dioxo-1,6-hexanediyl)imino-1,6-hexanediyl]; **Polyvinyl chloride**; Aluminum Alloy 6061; UNS S30400 Stainless Steel Alloy; Steel manufacture, chemicals; 2-Propenoic acid, 2-methyl-, methyl ester, polymer with ethyl 2-propenoate; Nylon 6; **Benzene, ethenyl-, homopolymer, brominated; Bis(pentabromophenyl) ether (decabromodiphenyl ether) (DecaBDE);** Tris(2-ethylhexyl) trimellitate; Zinc; Methyl methacrylate; Antimony oxide (Antimony trioxide); Kaolin, calcined; Octadecanoic acid, calcium salt; Steel, carbon

¹LBC Temp Exception RL-002 - Small Electrical Components

Living Building Challenge Criteria:

I-13 Red List:

☐ LBC Red List Free	% Disclosed: 100% at 100ppm
☐ LBC Red List Approved	VOC Content: Not Applicable
☒ Declared	

I-10 Interior Performance: Not Applicable
I-14 Responsible Sourcing: Not Applicable

FPL-0003
EXP. 01 FEB 2027
Original Issue Date: 2024

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

Declare label applies to lensed shielding ordering codes BW & FL only.

LOUVERED PERFORMANCE CHART

Size	Lumen Output	Tested System Watts	 NFL		 FL1		 FL2		 WFL		 LMC	
			Delivered Lumens	LPW	Delivered Lumens	LPW	Delivered Lumens	LPW	Delivered Lumens	LPW	Delivered Lumens	LPW
4'	1500	15.4	2028	132	1726	112	1830	119	1509	98	1460	95
	2250	21.0	2999	143	2552	122	2707	129	2233	106	2159	103
	3000	29.0	4134	142	3518	121	3732	129	3078	106	2977	103
	3750	35.5	5170	146	4400	124	4667	131	3849	108	3722	105
	4500	41.5	6110	147	5200	125	5515	133	4548	110	4399	106
	5250	47.4	7041	149	5992	127	6355	134	5241	111	5069	107
	6000	53.8	8046	150	6847	127	7263	135	5990	111	5793	108
6'	2250	22.8	3042	133	2588	113	2745	120	2264	99	2190	96
	3375	31.6	4499	142	3829	121	4061	128	3349	106	3239	102
	4500	42.5	6202	146	5278	124	5598	132	4617	109	4465	105
	5625	51.6	7755	150	6600	128	7000	136	5773	112	5584	108
	6750	60.4	9165	152	7799	129	8273	137	6823	113	6599	109
	7875	70.0	10561	151	8988	128	9533	136	7862	112	7604	109
	9000	82.8	12069	146	10271	124	10894	132	8985	108	8690	105

Based on 3500K, 80 CRI. Delivered lumens may vary +/- 5%. Actual wattage may vary +/- 5%

Louver Color Temperature & CRI		Louver Finish		Louver Distribution	
Color Temperature	Multiplier	Color	Multiplier	Distribution	Multiplier
2700K, 80+ CRI [27K]	0.95	Matte Black [BK]	1.00	Narrow Flood [NFL]	1.34
2700K, 90+ CRI [927K]	0.80	Black Specular [BS]	1.00	Flood 1 [FL1]	1.14
3000K, 80+ CRI [30K]	0.97	Clear Diffuse [CD]	1.07	Flood 2 [FL2]	1.21
3000K, 90+ CRI [930K]	0.83	Clear Specular [CS]	1.10	Wide Flood [WFL]	1.00
3500K, 80+ CRI [35K]	1.00	Matte White [WH]	1.11	Louvered Mixing Chamber [LMC]	0.97
3500K, 90+ CRI [935K]	0.85				
4000K, 80+ CRI [40K]	1.03				
4000K, 90+ CRI [940K]	0.87				


How To Use Lumen Multipliers

Formula: (Lumen Output Value) x (Color Temperature & CRI) x (Distribution) x (Finish)

Finishes



STANDARD FINISHES

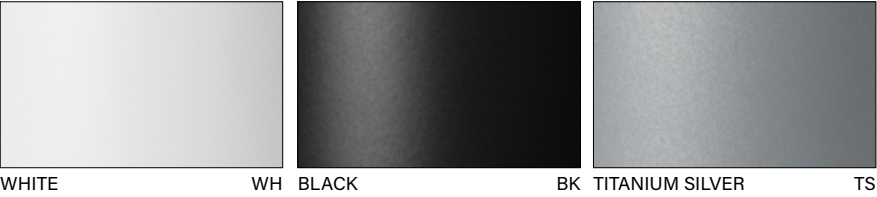

THE NATURALS (25% SCALE)

