



# Seem® 2

LED INDIRECT ONLY WALL MOUNT

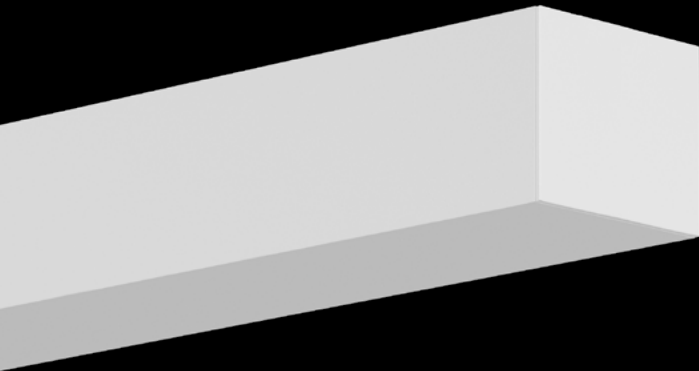

The Naturals collection - Walnut shown




Suspended companion



Recessed companion

## DIMENSIONAL DATA

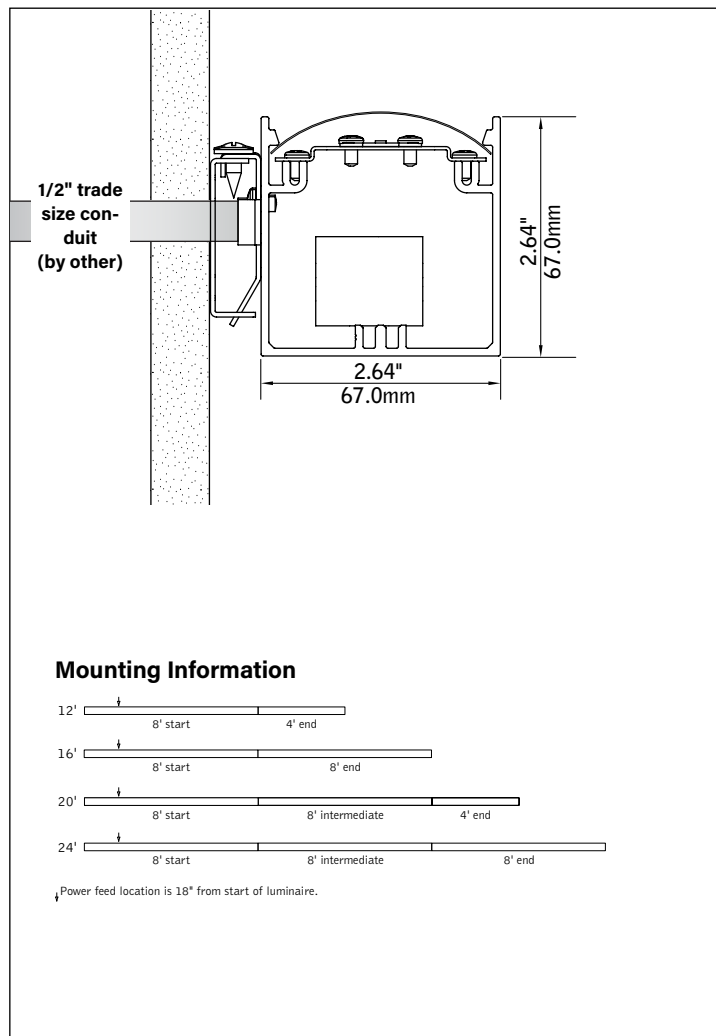

## FEATURES

2.64" square extruded aluminum linear indirect LED wall mount luminaire.

Individual units and continuous runs in 1"- increments.


Choice of output levels and light distributions to meet a wide variety of application needs.

Features Right Light lumen levels allowing lumen and wattage design flexibility.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Available with The Naturals, a series of finishes that exude biophilic beauty.

## PERFORMANCE

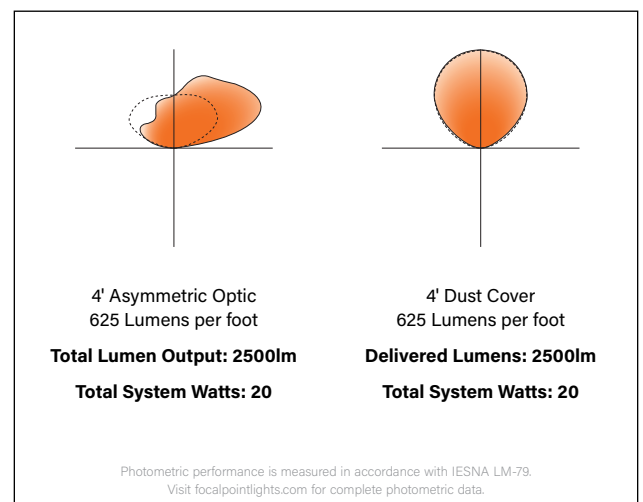

DETAILS

Standard Patterns with 90° Corners

'L' Patterns - A'xB'

Order: 8'x6''

Order: 6'x8''

Order: 8'x6'x4''

Order: 8'x6'x4''

Corner Detail

Corners are constructed as 5° extensions to straight runs on one or both ends.

Ordering examples assume A=8', B=6' & C=4'

Specify clockwise from start of run.

Start of run is always at first specified run length.

4' PERFORMANCE CHART

Lumens per Foot	Delivered Lumens	Asymmetric Optic		Dust Cover	
		Tested System Watts	LPW	Tested System Watts	LPW
250LF	1000	7.34	136	7.23	138
375LF	1500	9.82	153	9.65	155
500LF	2000	12.64	158	12.41	161
625LF	2500	15.58	160	15.30	163
750LF	3000	18.58	161	18.24	164
875LF	3500	22.51	155	21.29	164
1000LF	4000	25.85	155	25.32	158
1125LF	4500	29.34	153	28.77	156
1250LF	5000	32.93	152	32.27	155
1375LF	5500	36.62	150	35.87	153
1500LF	6000	40.47	148	39.58	152

Based on 3500K, 80 CRI, 4' lengths. Lumen multipliers: 90 CRI = 0.87. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%

ORDERING

Luminaire Series	FSM2IW	FSM2IW
Seem 2 LED Indirect	FSM2IW	
Shielding		
Asymmetric Optic	AS	
Dust Cover	DC	
Indirect Distribution		
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
750 Lumens per foot	750LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
1125 Lumens per foot	1125LF	
1250 Lumens per foot	1250LF	
1375 Lumens per foot	1375LF	
1500 Lumens per foot	1500LF	
1625 Lumens per foot	1625LF	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI or 90+ CRI	40K or 940K	
Circuits & Zones		
1 Circuit, non-emergency	1C	
Consult Ordering Guide for multiple circuiting and zoning options	_C_Z_DL	
Voltage		
120/277 UNV Volt	UNV	
347 Volt	347	
(LD1 driver only)		
Low Voltage	LV	
Control System & Dimming Level		
0-10V - 10% Dimming	LD1	
0-10V - 1% Dimming	L11	
Low Voltage, PoE compatible	LVN	
(No driver. Not available with EM or EC. LV Voltage only.)		
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming	LH1	
DALI 1% Dimming	D11	
(250LF 3' minimum. 875LF max.)		
Mounting		WM
Wall Mount	WM	
Factory Options		
(See Ordering Guide on page 3 for ordering details for DC, EC, EM & ECD.)		
Daylight Circuit	_DC	
Auxillary Circuit	_EC	
Backup Battery Pack†	_EM	
Emergency Control Device†	_ECD	
†(4' minimum. 120/277 Volt only. Does not meet UL 924.)		
Finish		
(See finishes page for The Naturals options)		
Black	BK	
Titanium Silver	TS	
Matte White Housing	WH	
Luminaire Length		ft in
Specify luminaire/row length in 1" increments	_ft_in	
(2" minimum. Leave blank for patterns. Smaller increments available, consult factory.)		
Pattern Options		
(2" minimum length)		
'L' pattern	A' x B'	
'U' pattern	A' x B' x C'	
(Consult factory for other pattern options)		



# Ordering Guide

## Linear Circuitry, Zones & Factory Options

### HOW TO USE THIS GUIDE

Fill out the worksheet on the following page to specify your requirements for circuitry, zones, and factory options.


Refer to the run chart for standard run configurations, consult factory for custom configurations.

Complete the Totals / Ordering Codes at the bottom of the worksheet and add to your ordering logic on the cut sheet.

Submit the worksheet along with your order.

EXAMPLE	TOTAL RUN LENGTH: 32ft		JOB NAME: _____			FIXTURE TYPE: _____		
	HOUSING SECTION	SECTION LENGTH	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS		
						SEPARATE ELECTRICAL FEEDS		EM
			SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	DAYLIGHT CIRCUIT	AUXILLARY CIRCUIT	
	1	8	1C	1Z				1EM
	2	8	2C	2Z				
Totals / Ordering Codes			2C	2Z		1DC		1EM

ORDERING: FSM2IW-DC-625LF-35K- 2C2Z -UNV-LD1-WM- 1DC-1EM -WH-32ft

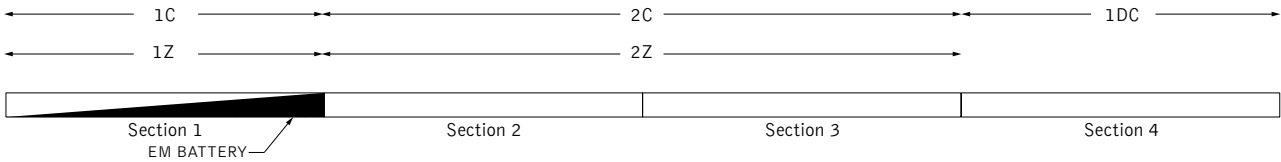

KEY	
<b>C = Switching Circuit</b> Switched Hot / Shared Neutral	<b>DC = Daylight Circuit</b> Switched Hot / Separate Neutral
<b>Z = Dimming Zone</b> Dimming Control Wires	<b>EC = Emergency Circuit</b> Switched Hot / Separate Neutral
<b>DL = Daylight Zone</b> Daylight Dimming Control Wires	<b>EM = Emergency Battery</b> Unswitched Hot / Shared Neutral
	<b>ECD = Emergency Control Device</b> Unswitched Hot / Separate Neutral

### DEFAULTS

- Zones and Factory Options illuminate entire sections from 4' to 8' in length.
- One shared or isolated circuit and zone required per housing section.
- Limit of one EM or ECD per housing section.
- Additional electrical feed required for applications greater than three shared circuits and zones.
- Each DC, EC and ECD require an additional electrical feed.
- ECD not available in the same housing section as EC.
- Longer lead times and additional pricing may apply for custom run configurations.

### CUSTOM LENGTHS

- If partial illumination of emergency or daylight section is required, indicate in ordering guide and add "partial illumination" in Order Notes. Drawing required.
- Engineering validation required, longer lead times may apply.

# Ordering Guide Worksheet

Linear Circuitry, Zones & Factory Options

WORKSHEET

TOTAL RUN LENGTH: _____		JOB NAME: _____			FIXTURE TYPE: _____			
HOUSING SECTION	SECTION LENGTH	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			
		SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	SEPARATE ELECTRICAL FEEDS			EM
DAYLIGHT CIRCUIT	AUXILLARY CIRCUIT				ECD			
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
Totals / Ordering Codes								

Combine to create Circuits & Zones ordering code

Enter as individual Factory Options

RUN CHART

Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths
9	5 + 4	21	8 + 8 + 5	33	8 + 8 + 8 + 5 + 4	45	8 + 8 + 8 + 8 + 8 + 5
10	6 + 4	22	8 + 8 + 6	34	8 + 8 + 8 + 6 + 4	46	8 + 8 + 8 + 8 + 8 + 6
11	7 + 4	23	8 + 8 + 7	35	8 + 8 + 8 + 7 + 4	47	8 + 8 + 8 + 8 + 8 + 7
12	8 + 4	24	8 + 8 + 8	36	8 + 8 + 8 + 8 + 4	48	8 + 8 + 8 + 8 + 8 + 8
13	8 + 5	25	8 + 8 + 5 + 4	37	8 + 8 + 8 + 8 + 5		
14	8 + 6	26	8 + 8 + 6 + 4	38	8 + 8 + 8 + 8 + 6		
15	8 + 7	27	8 + 8 + 7 + 4	39	8 + 8 + 8 + 8 + 7		
16	8 + 8	28	8 + 8 + 8 + 4	40	8 + 8 + 8 + 8 + 8		
17	8 + 5 + 4	29	8 + 8 + 8 + 5	41	8 + 8 + 8 + 8 + 5 + 4		
18	8 + 6 + 4	30	8 + 8 + 8 + 6	42	8 + 8 + 8 + 8 + 6 + 4		
19	8 + 7 + 4	31	8 + 8 + 8 + 7	43	8 + 8 + 8 + 8 + 7 + 4		
20	8 + 8 + 4	32	8 + 8 + 8 + 8	44	8 + 8 + 8 + 8 + 8 + 4		

Standard run configurations, consult factory for custom configurations.

# Finishes



**STANDARD FINISHES**



**THE NATURALS (25% SCALE)**

