


# Seem® 2


LED



## DIMENSIONAL DATA

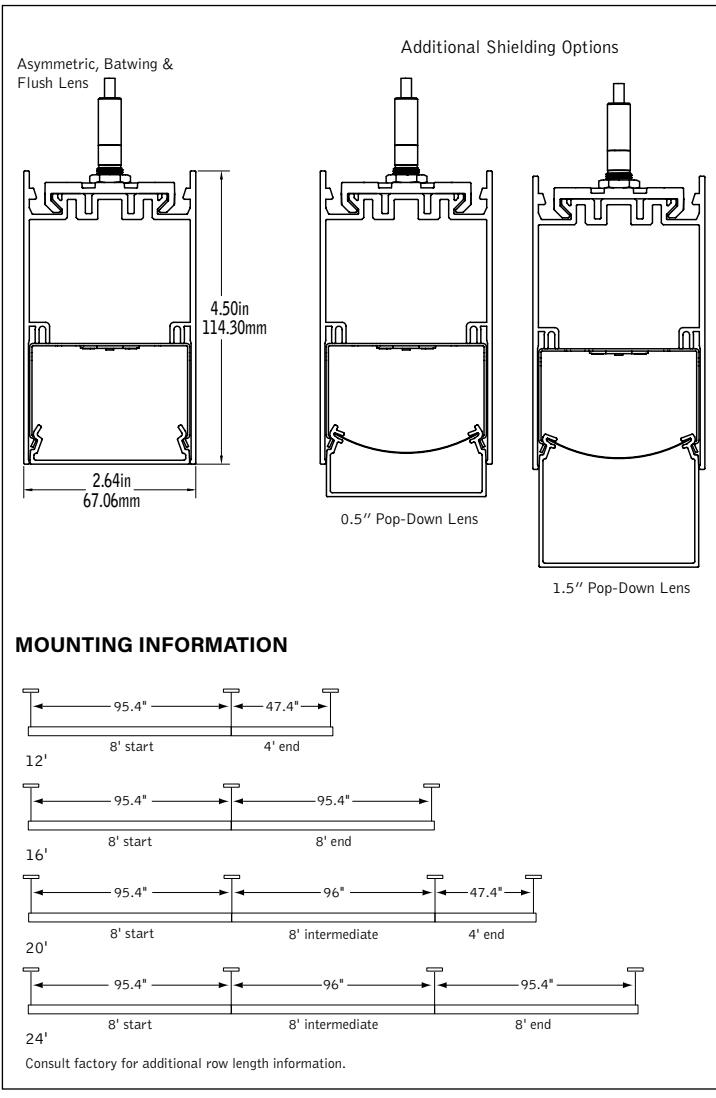

## MOUNTING INFORMATION

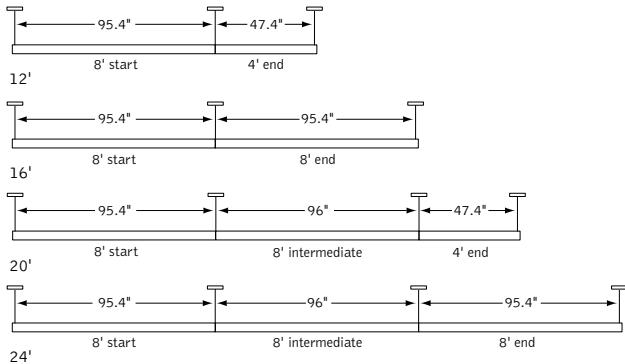

Consult factory for additional row length information.

## FEATURES

Narrow 2.5" linear direct LED with Asymmetric, Batwing, Flush, 0.5" or 1.5" Pop-Down lens.

Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.


Individual units and continuous runs in 1' increments.

Connected Solutions: Integrates with wired and wireless building lighting control systems.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.


Available with The Naturals, a series of finishes that exude biophilic beauty.

## DISTRIBUTIONS

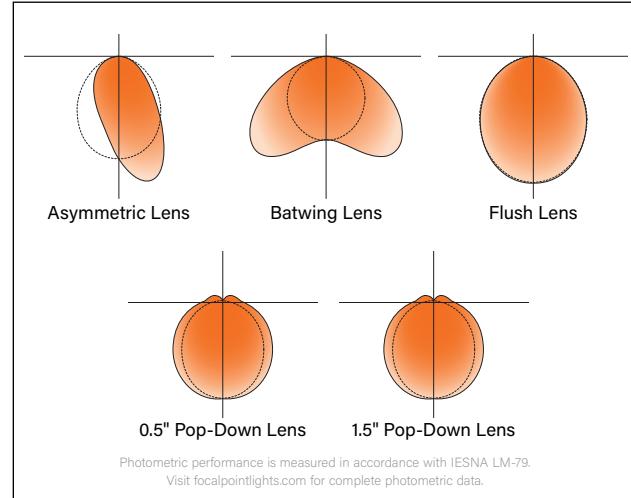

Photometric performance is measured in accordance with IESNA LM-79. Visit [focalpointlights.com](http://focalpointlights.com) for complete photometric data.

## MOUNTING INFORMATION

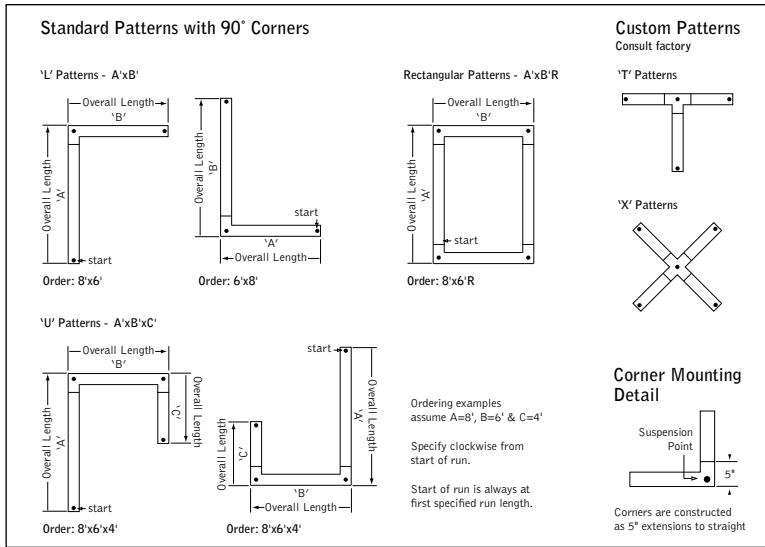

## SPECIFICATIONS

### LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80 or CRI>90, 3 SDCM. 3500K and 4000K with CRI>90 have a cyanosis observation index (COI) of 3.3 or less. LED modules and drivers are replaceable from below.

### Construction

One piece extruded aluminum housing. Cast aluminum end caps. 8' unit weight: 30 lbs.

### Optic

Reflectors fabricated of 22 Ga. steel finished in matte white powder coat. Extruded acrylic lens with satin finish, up to 8' continuous.

### Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Power factor > .9. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires. PoE runs require an independent PoE node and power feed for each luminaire section.

### Emergency

Emergency Battery output - 10 watts for 90 minutes. Maximum mounting height: 20 ft. Emergency Circuit with Connected Solutions (DLM1, LMFS1, LMFS2, NLT1, CLM1, NXE1, WLXP) shipped standard with leads to connect UL924 compliant device, by others.

### Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

### Finish

Polyester powder coat applied over a multi-stage pre-treatment. Canopy and cord white as standard. The Naturals: 100% low VOC vinyl.

### Lumen Maintenance

Reported: L70 at >61,000 hours  
L90 at >61,000 hours

Calculated: L70 at 385,000 hours  
L90 at 103,000 hours

Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

### Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

### Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

## 4' PERFORMANCE CHART

See page 3.



Options in orange qualify for the Quickship program. 1000' total.  
Refer to Quickship Guide for complete details including EM/EC options.

## ORDERING

### Luminaire Series

**FSM2LS**

### Seem 2 LED

### Shielding

### Asymmetric Lens

**AS**

**BW**

**FL**

**PD05**

**PD15**

### Batwing Lens

### Flush Lens

**0.5" Pop-Down Lens**

**1.5" Pop-Down Lens**

(Individual units only)

### Lumen Output

**125 Lumens per foot**

(LD1 & L11 only. 4' minimum)

**250 Lumens per foot**

(3' minimum with LH1)

**375 Lumens per foot**

**500 Lumens per foot**

**625 Lumens per foot**

**750 Lumens per foot**

**875 Lumens per foot**

**1000 Lumens per foot**

### Color Temperature

**27K or 927K**

**30K or 930K**

**35K or 935K**

**40K or 940K**

### Circuits & Zones

**1C**

**\_C\_Z\_DL**

### Voltage

**120/277 UNV Volt**

**347V**

(LD1 & L11 only)

### Low voltage

### Control System & Dimming Level

**0-10V - 10% Dimming**

**0-10V - 1% Dimming**

### Low Voltage, PoE compatible

(No driver. Not available with EM or EC. LV Voltage only.)

### Lutron Hi-Lume EcoSystem (LDE1) -

**1% Dimming**

**DALI 1% Dimming**

(For 750LF, 875LF & 1000LF consult factory.)

### Wattstopper DLM - 1% Dimming\*\*

**DLM1**

### Wattstopper Fixture Sensor\*\*

**LMFS1**

**Low Density - 1% Dimming**

*See sensor layout guide*

### Wattstopper Fixture Sensor\*\*

**LMFSD**

**High Density - 1% Dimming**

*See sensor layout guide*

### Lutron Athena Wireless Node\*\*

**LAW1**

### Lutron Athena Wireless Sensor\*\*

**LAWS**

(Remote mounted sensor. *See sensor layout guide*)

### Acuity nLight - 1% Dimming\*\*

**NLT1**

(For 750LF, 875LF & 1000LF consult factory.)

### Encelium CLM Connected Lighting Module\*\*

**CLM1**

**1% Dimming**

**Current NX Enabled - 1% Dimming\*\***

**NXE1**

### WaveLinx Pro - 1% Dimming\*\*

**WLXP**

*See sensor layout guide*

\*\*(3' minimum length, with ECD/EM - 7' minimum.)

*'Not available with pop-down lenses.)*

*\*(0-10V standard, consult factory for DAL)*

### Mounting

**24" Cable Suspension**

**C24**

**48" Cable Suspension**

**C48**

**96" Cable Suspension**

**C96**

(Specify canopy color, see finishes page for options.)

*Example: White = C24WH)*

*(Specify one of the following in place of "C"*

*J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)*

### Surface Mount

(Not available with LAW1, CLM1, DLM1, NLT1 or NXE1)

### Factory Options

(See Ordering Guide for ordering details for DC, EC, EM & ECD.)

**Black Cord**

**Daylight Circuit**

**Emergency Circuit**

**Emergency Battery Pack<sup>†</sup>**

**Emergency Control Device<sup>†</sup>**

*(3' minimum. 120/277 Volt only.)*

### Finish

(See finishes page for The Naturals options.)

**Black**

**Titanium Silver**

**Matte White Housing**

**WH**

**Luminaire Length**

**Specify luminaire/row length in 1' increments**

*(2' minimum. Leave blank for patterns. Smaller increments available, consult factory.)*

### Pattern Options

*(2' minimum length)*

**'L' pattern**

**'U' pattern**

**Rectangular pattern**

*(Consult factory for other pattern options.)*

**A' x B'**

**A' x B' x C'**

**A' x B' R**

#### 4' PERFORMANCE CHART

Shielding	Lumens per Foot	Delivered Lumens	Tested System Watts	LPW
Asymmetric Lens	125LF	500	5.64	89
	250LF	1000	8.24	121
	375LF	1500	11.22	134
	500LF	2000	14.53	138
	625LF	2500	17.93	139
	750LF	3000	22.22	135
	875LF	3500	26.00	135
	1000LF	4000	29.84	134
Batwing Lens	125LF	500	5.63	89
	250LF	1000	8.27	121
	375LF	1500	11.26	133
	500LF	2000	14.62	137
	625LF	2500	18.02	139
	750LF	3000	22.32	134
	875LF	3500	26.15	134
	1000LF	4000	30.07	133
Flush Lens	125LF	500	5.48	91
	250LF	1000	8.87	113
	375LF	1500	12.17	123
	500LF	2000	15.84	126
	625LF	2500	19.65	127
	750LF	3000	24.45	123
	875LF	3500	28.65	122
	1000LF	4000	33.12	121
Pop Down 0.5" Lens	125LF	500	5.72	87
	250LF	1000	9.35	107
	375LF	1500	12.91	116
	500LF	2000	16.89	118
	625LF	2500	21.70	115
	750LF	3000	26.14	115
	875LF	3500	30.69	114
	1000LF	4000	35.43	113
Pop Down 1.5" Lens	125LF	500	5.56	90
	250LF	1000	9.02	111
	375LF	1500	12.40	121
	500LF	2000	16.17	124
	625LF	2500	20.06	125
	750LF	3000	24.96	120
	875LF	3500	29.33	119
	1000LF	4000	33.72	119

Based on 3500k, 80CRI, 4' lengths. Lumen multiply 90+ CRI = 0.86  
Delivered lumens may vary +/- 5%. Actual wattage may vary +/- 5%

# Declare.

## Seem 2 Focal Point, LLC

Final Assembly: Chicago, Illinois, USA

Life Expectancy: 10 Year(s)

End of Life Options: Recyclable (55%), Landfill (45%)

### Ingredients:

Aluminum; Steel; Small Electrical Components - RoHS Compliant<sup>1</sup>; Polymethyl methacrylate; UNS G1008; Copper; Zinc; Steel, carbon; **Polyvinyl chloride**; Poly[imino(1,6-dioxo-1,6-hexanediy)imino-1,6-hexanediy]; Methyl methacrylate; **Benzene, ethenyl-, homopolymer, brominated; Bis(pentabromophenyl) ether (decabromodiphenyl ether) (DecaBDE)**; Polyethylene; Polypropylene; Steel manufacture, chemicals

<sup>1</sup>LBC Temp Exception RL-002 - Small Electrical Components

### Living Building Challenge Criteria:

#### I-13 Red List:

LBC Red List Free  
 LBC Red List Approved  
 Declared

% Disclosed: 100% at 100ppm

VOC Content: Not Applicable

#### I-10 Interior Performance: Not Applicable

#### I-14 Responsible Sourcing: Not Applicable

FPL-0003  
EXP. 01 JAN 2026  
Original Issue Date: 2024

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY  
INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](http://living-future.org/declare)

Focal Point provides flexibility in meeting the needs of each project by integrating with several building lighting control systems. A variety of sensors, drivers and other components can be specified that allow the luminaires to communicate with wired and wireless networks. All zoning can be digitally reconfigured through the application software. Daylight harvesting, occupancy sensing, integration with HVAC systems, and individual controls enable the monitoring and modulating of light levels and temperature in order to save energy, reduce costs and maximize occupants' comfort. All Connected Solutions luminaires require a compatible building control system.<sup>†</sup>

Connected Solution	Ordering Code	Model #*	Protocol	Compatible Networks*	Occupancy & Daylight	Temperature Reporting	Communication to Luminaire	Drivers	
 WATTSTOPPER®	DLM1	LMFC-011	DLM	DLM	Enabled <sup>†</sup>	No	Wired	<b>Advance by Signify</b> , Optotronic by eldoLED	
	LMFS1	LMFS-601 & LMFI-111	DLM Wireless	DLM	Integrated <sup>‡</sup>	No	Wireless		
	LMFSD	LMFS-601							
	WLXP	OEM-WAA	WaveLinx Wireless	WaveLinx Pro Trellix	Integrated <sup>‡</sup>	No	Wireless (WaveLinx Pro Wireless Area Controller)	<b>Advance by Signify</b>	
	D11	Specified Driver	DALI	Crestron Züm Wireless & SpaceBuilder	Enabled <sup>†</sup>	No	Wired	eldoLED ECODrive	
	L11		0-10V					<b>Advance by Signify</b>	
	CLM1	ZBHA-CLM-DIM-ENC	ZigBee	Encelium X Light Management System	Enabled <sup>†</sup>	No	Wireless	<b>Optotronic by eldoLED</b> Advance by Signify	
	LAW1	A-WN-D01-RF-WH	DALI, 0-10V	Athena Wireless	Enabled <sup>†</sup>	No	Wireless	<b>Advance by Signify</b>	
	LAWS	A-WN-D01-OCC-WH	DALI, 0-10V	Athena Wireless	Integrated <sup>‡</sup>	No	Wireless	<b>Advance by Signify</b>	
	LH1	LDE1	EcoSystem	Quantum, Energi Savr Node, Energi TriPak	Enabled <sup>†</sup>	No	Wired	<b>Lutron Hi-Lume</b>	
	NLT1	nEPS-60-IO	nLight	nLight	Enabled <sup>†</sup>	No	Wired	eldoLED ECODrive, eldoLED SOLOdrive	
	NXE1	NXFM-LV	NX	NX Distributed Intelligence	Enabled <sup>†</sup>	No	Wired		
								<b>Optotronic by eldoLED</b>	


\*Not all compatible networks may be listed. \*\*For performance data and additional control system details please visit the connected solutions manufacturer websites. Primary drivers are listed in **bold**. To specify a particular driver please consult factory.

<sup>†</sup>Controls systems supplied by others. <sup>‡</sup>Enabled: Fixture supplied with a Node/ Controller. Sensor to be provided by others. <sup>‡</sup>Integrated: Fixture supplied with an installed Sensor.

# Finishes



## STANDARD FINISHES

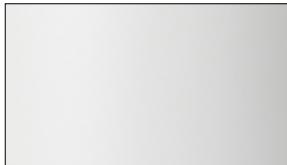

WHITE



WH BLACK



BK TITANIUM SILVER

TS

## THE NATURALS (25% SCALE)



LIGHT OAK



LOK GRAY ELM



GRE CHESTNUT



CHT WALNUT



WLT WOVEN LINEN

WLN

# Ordering Guide



## Direct Only Linear Circuitry, Zones & Factory Options

### HOW TO USE THIS GUIDE

Fill out the worksheet on the following page to specify your requirements for circuitry, zones, and factory options.


Refer to the run chart for standard run configurations, consult factory for custom configurations.

Complete the Totals / Ordering Codes at the bottom of the worksheet and add to your ordering logic on the cut sheet.

Submit the worksheet along with your order.

EXAMPLE	TOTAL RUN LENGTH: <b>32ft</b>		JOB NAME: _____			Fixture Type: _____			
	HOUSING SECTION	SECTION LENGTH	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			EM
			SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	ECD	
	1	8	1C	1Z					1EM
	2	8	2C	2Z					
	3	8	2C	2Z					
	4	8				1DC			
	<b>Totals / Ordering Codes</b>		<b>2C</b>	<b>2Z</b>		<b>1DC</b>			<b>1EM</b>

ORDERING: FSM4L-FL-625LF-35K- **2C2Z** -UNV-LD1-G2- **1DC-1EM** -WH-32ft

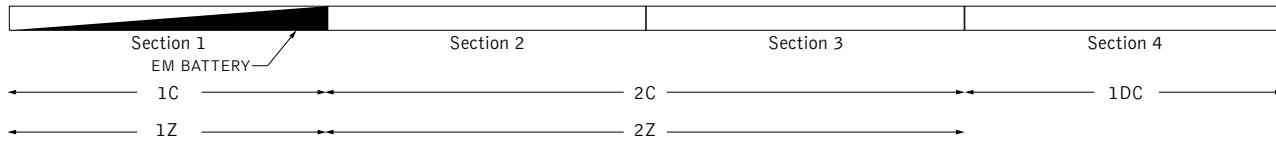

KEY	
<b>C = Switching Circuit</b> Switched Hot / Shared Neutral	<b>DC = Daylight Circuit</b> Switched Hot / Separate Neutral
<b>Z = Dimming Zone</b> Dimming Control Wires	<b>EC = Emergency Circuit</b> Switched Hot / Separate Neutral
<b>DL = Daylight Zone</b> Daylight Dimming Control Wires	<b>EM = Emergency Battery</b> Unswitched Hot / Shared Neutral
	<b>ECD = Emergency Control Device</b> Unswitched Hot / Separate Neutral

### DEFAULTS

- Zones and Factory Options illuminate entire sections from 4' to 8' in length.
- One shared or isolated circuit and zone required per housing section.
- Limit of one EM or ECD per housing section.
- Additional electrical feed required for applications greater than three shared circuits and zones.
- Each DC, EC and ECD require an additional electrical feed.
- ECD not available in the same housing section as EC.
- Longer lead times and additional pricing may apply for custom run configurations.

### CUSTOM LENGTHS

- If partial illumination of emergency or daylight section is required, indicate in ordering guide and add "partial illumination" in Order Notes. Drawing required.
- Engineering validation required, longer lead times may apply.

# Ordering Guide Worksheet

Linear Circuitry, Zones & Factory Options



WORKSHEET	TOTAL RUN LENGTH:		JOB NAME: _____			Fixture Type: _____		
	HOUSING SECTION	SECTION LENGTH	Shared Electrical Feed, Normal Power			FACTORY OPTIONS		
			Switching Circuit	Dimming Zone	Daylight Zone	Daylight Circuit	Emergency Circuit	ECD
	1							
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
<b>Totals / Ordering Codes</b>								

Combine to create Circuits & Zones ordering code      Enter as individual Factory Options

## RUN CHART

Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths
9	5 + 4	21	8 + 8 + 5	33	8 + 8 + 8 + 5 + 4	45	8 + 8 + 8 + 8 + 8 + 5
10	6 + 4	22	8 + 8 + 6	34	8 + 8 + 8 + 6 + 4	46	8 + 8 + 8 + 8 + 8 + 6
11	7 + 4	23	8 + 8 + 7	35	8 + 8 + 8 + 7 + 4	47	8 + 8 + 8 + 8 + 8 + 7
12	8 + 4	24	8 + 8 + 8	36	8 + 8 + 8 + 8 + 4	48	8 + 8 + 8 + 8 + 8 + 8
13	8 + 5	25	8 + 8 + 5 + 4	37	8 + 8 + 8 + 8 + 5		
14	8 + 6	26	8 + 8 + 6 + 4	38	8 + 8 + 8 + 8 + 6		
15	8 + 7	27	8 + 8 + 7 + 4	39	8 + 8 + 8 + 8 + 7		
16	8 + 8	28	8 + 8 + 8 + 4	40	8 + 8 + 8 + 8 + 8		
17	8 + 5 + 4	29	8 + 8 + 8 + 5	41	8 + 8 + 8 + 8 + 5 + 4		
18	8 + 6 + 4	30	8 + 8 + 8 + 6	42	8 + 8 + 8 + 8 + 6 + 4		
19	8 + 7 + 4	31	8 + 8 + 8 + 7	43	8 + 8 + 8 + 8 + 7 + 4		
20	8 + 8 + 4	32	8 + 8 + 8 + 8	44	8 + 8 + 8 + 8 + 8 + 4		

Standard run configurations, consult factory for custom configurations.