



Seem[®] 2

LED - WET LOCATION

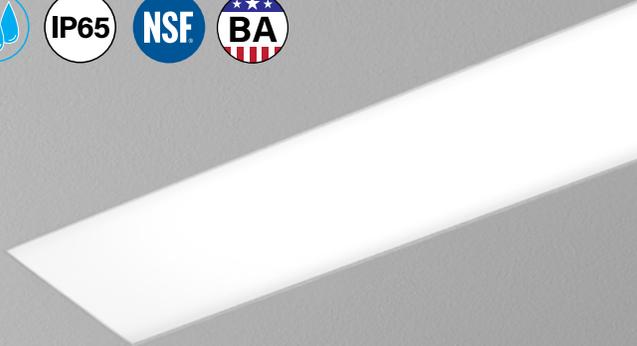

DIMENSIONAL DATA

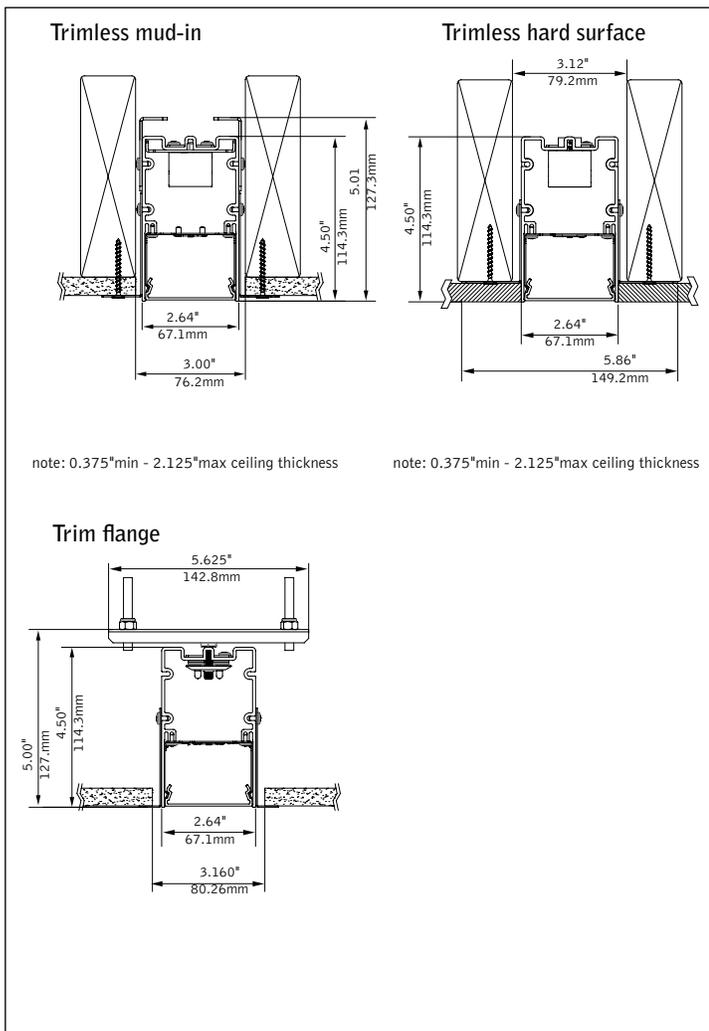

FEATURES

Narrow extruded aluminum 2.5" aperture recessed slot LED suitable for wet location.


Integrates with ceiling for a clean, unobtrusive aesthetic.

Individual units and continuous runs in 1' increments.




Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.

LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.

PERFORMANCE

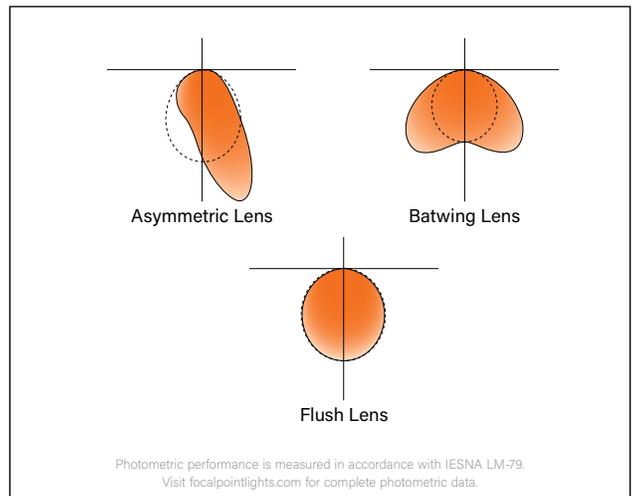

4' PERFORMANCE CHART

| Shielding | | Lumens per Foot | Delivered Lumens | Tested System Watts | LPW |
|-----------------|---|-----------------|------------------|---------------------|-----|
| Asymmetric Lens |  | 125LF | 500 | 5.9 | 85 |
| | | 250LF | 1000 | 8.2 | 122 |
| | | 375LF | 1500 | 11.1 | 135 |
| | | 500LF | 2000 | 14.5 | 138 |
| | | 625LF | 2500 | 17.9 | 140 |
| | | 750LF | 3000 | 22.1 | 136 |
| | | 875LF | 3500 | 25.9 | 135 |
| | | 1000LF | 4000 | 29.8 | 134 |
| Batwing Lens |  | 125LF | 500 | 5.5 | 91 |
| | | 250LF | 1000 | 8.7 | 115 |
| | | 375LF | 1500 | 12.0 | 125 |
| | | 500LF | 2000 | 15.5 | 129 |
| | | 625LF | 2500 | 20.0 | 125 |
| | | 750LF | 3000 | 24.0 | 125 |
| | | 875LF | 3500 | 28.1 | 125 |
| | | 1000LF | 4000 | 32.4 | 123 |
| Flush Lens |  | 125LF | 500 | 5.6 | 89 |
| | | 250LF | 1000 | 9.0 | 111 |
| | | 375LF | 1500 | 12.4 | 121 |
| | | 500LF | 2000 | 16.2 | 124 |
| | | 625LF | 2500 | 20.8 | 120 |
| | | 750LF | 3000 | 24.9 | 120 |
| | | 875LF | 3500 | 29.3 | 119 |
| | | 1000LF | 4000 | 33.8 | 118 |

Based on 3500k, 80CRI, 4' lengths. Lumen multiplie 90+ CRI = 0.86, Continuous runs = 0.93. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.