



Seem® 4

ASYMMETRIC LED

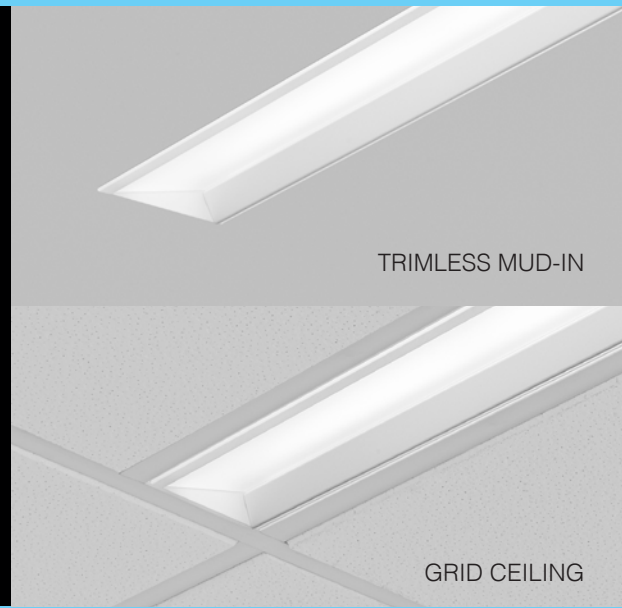

PERFORMANCE - 6' SPACING

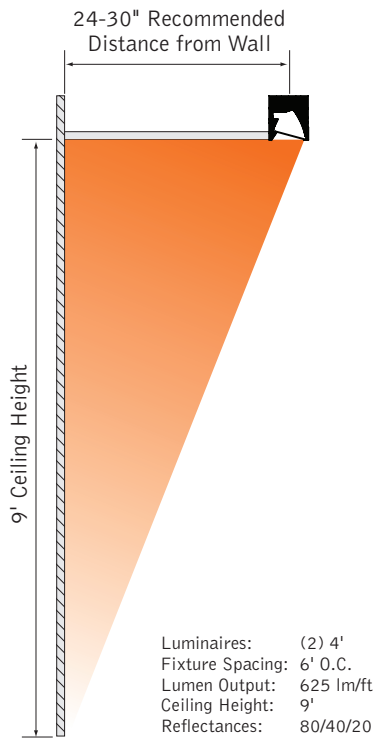


24" from wall | 2.5 : 1 uniformity

32.6	45.8	35.3	35.4	45.8	32.4
32.2	44.8	40.1	39.4	44.8	33.2
17.4	21.3	21.5	21.4	21.4	17.7
10.7	11.7	12.4	12.4	11.8	10.7

30" from wall | 2.0 : 1 uniformity

23.4	29.6	25.3	25.3	29.6	23.2
29.9	39.9	37.2	37.0	40.0	30.3
19.8	24.4	24.8	24.6	24.5	20.1
12.5	13.9	14.9	14.8	13.9	12.5



Lumens per foot	System Watts	Delivered Lumens	LPW
275LF	14	1100	76
375LF	20	1500	76
625LF	33	2500	75
875LF	49	3500	71


*Data based on 4' luminaire

FEATURES


- Asymmetric companion to our popular Seem 4 LED family
- Fully recessed optic provides clean visual aesthetic
- Standard per foot lumen outputs include 275, 375, 625 & 875
- Continuous runs in 1' increments provide maximum design flexibility
- Excellent wall uniformity
- Great lateral distribution allows for 8' on center fixture spacing
- 0-10V 10% or Lutron Dimming

DIMENSIONAL DATA

Grid ceiling, trim flange, trimless drywall and hard ceiling mounting available.

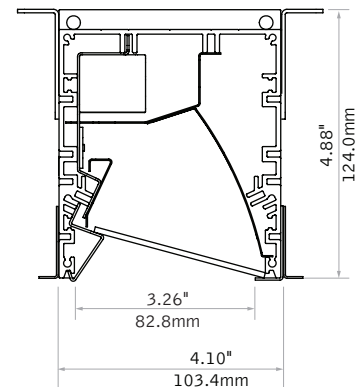

PERFORMANCE - 12' CONTINUOUS RUN

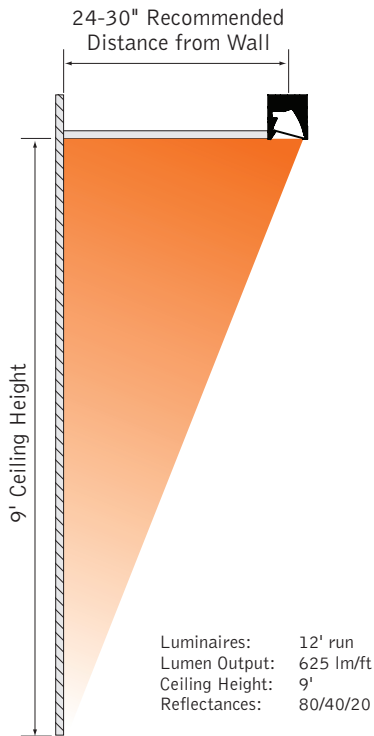


24" from wall | 2.6 : 1 uniformity

51.2	57.7	58.1	58.1	57.8	51.0
48.0	59.8	61.9	61.8	59.8	48.9
25.5	30.6	32.1	32.1	30.6	25.7
15.6	17.3	18.2	18.3	17.3	15.7

30" from wall | 2.0 : 1 uniformity

36.7	39.8	40.0	40.1	39.8	36.6
44.4	54.7	57.0	57.0	54.8	44.7
28.9	35.0	36.8	36.8	34.9	29.2
18.3	20.7	21.8	21.8	20.6	18.4

PERFORMANCE - 8' SPACING

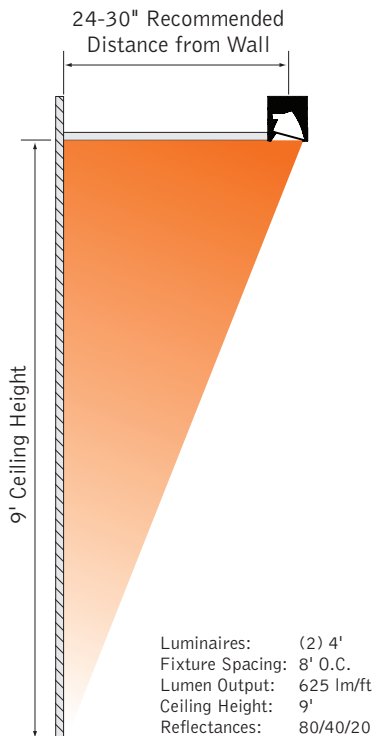

24" from wall | 2.5 : 1 uniformity

28.9	39.6	26.9	15.1	27.9	39.6	28.4
30.6	41.4	32.6	22.5	31.7	41.3	31.3
15.8	18.9	17.3	15.8	17.4	18.9	16.3
9.1	10.4	10.4	10.3	10.4	10.3	9.3

30" from wall | 1.9 : 1 uniformity

20.9	26.3	19.4	13.1	20.1	26.2	20.5
28.4	36.6	29.8	22.5	29.6	36.6	28.6
18.0	21.7	20.1	18.2	20.0	21.7	18.3
10.7	12.3	12.3	12.2	12.3	12.3	11.0

ORDERING

Luminaire Series	FSM4AL
Seem 4 Asymmetric LED	FSM4AL
Shielding	FL
Frosted Lens	FL
Nominal Output	
275 Lumens per foot (Not available with L3D driver.)	275LF
375 Lumens per foot	375LF
625 Lumens per foot	625LF
875 Lumens per foot	875LF
Color Temperature	
3000K	30K
3500K	35K
4000K	40K
Circuit	1C
Single Circuit	1C
Voltage	
120 Volt	120
277 Volt	277
UNV Volt	UNV
<small>(Cannot be specified with EM option)</small>	
Driver	
<small>(See driver reference for driver quantities)</small>	
0-10V - 10% Dimming	LD1
Lutron A-Series - 1% EcoSystem Digital <small>(consult factory for 3-wire control)</small>	L3D
Ceiling Configuration	
Std. 15/16" Lay-in	G1
Std. 15/16" Tegular	T1
Std. 9/16" Lay-in	G2
Std. 9/16" Tegular	T2
9/16" Slot-tee Tegular	G3
Tall 15/16" Lay-in	G4
Tall 15/16" Tegular	T4
Tall 9/16" Lay-in	G5
Tall 9/16" Tegular	T5
Node 9/16" Tegular	T6
Trim Flange Drywall	TF
Mud-in Trimless, pre-set for 1/2" Drywall	XF1
Mud-in Trimless, pre-set for 5/8" Drywall	XF2
Mud-in Trimless, set thickness in field <small>(Mounting equipment assembled in field)</small>	XFF
Non-Drywall Hard Surface	XFN
Factory Options	
Chicago Plenum	CP
Emergency Circuit <small>(625LF & 875LF only)</small>	EC
Emergency Battery Pack <small>(4' lengths or longer)</small>	EM
Flex Whip	FW
Finish	WH
Matte White Housing	WH
Luminaire Length <small>(Lengths are nominal. 2' minimum length.)</small>	
Specify luminaire/row length in 1' increments <small>(Smaller increments available. Consult factory for details.)</small>	X'