


# Seem® 6

LED WALL TO CEILING CORNER



trimless mud-in

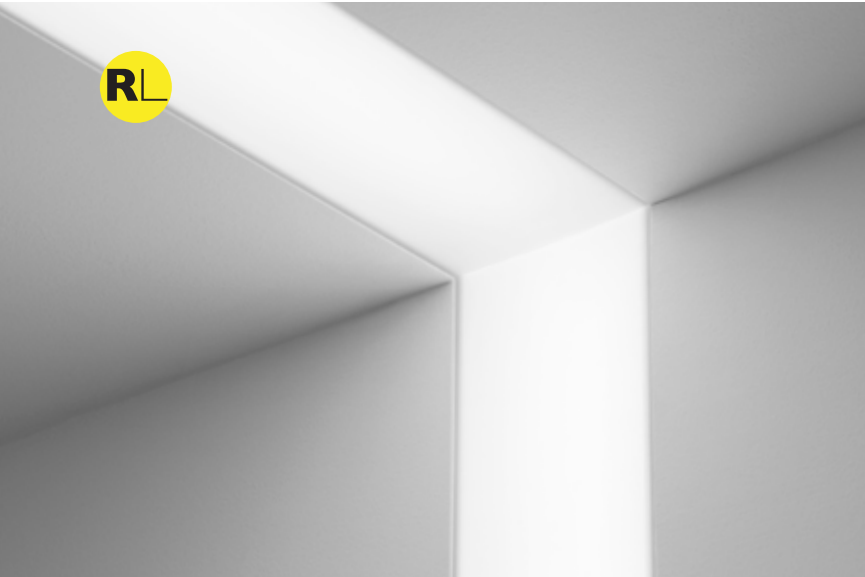


end detail



pop-down lens companion

## DIMENSIONAL DATA

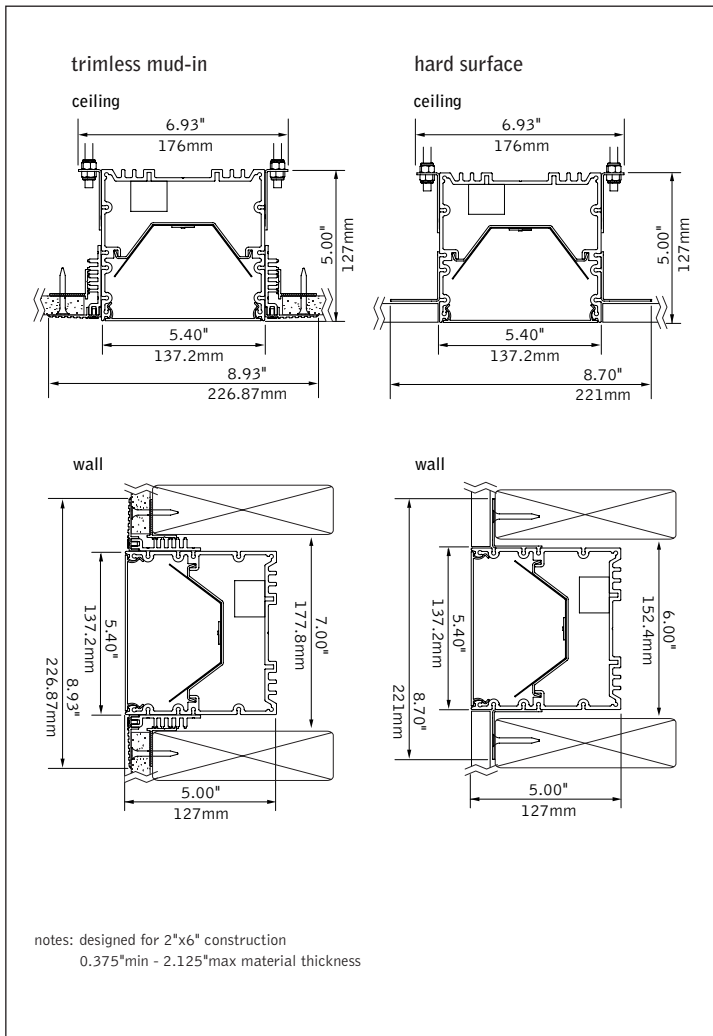

## FEATURES

Narrow extruded aluminum 6" aperture recessed slot LED that transitions from wall to ceiling.

Clean and minimal trimless drywall mounting.

Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.

LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.

Choice of output levels to meet a wide variety of application needs.

## PERFORMANCE

**PRODUCT OVERVIEW**

- Lumen Output: 1500-4000lm
- Wattage: 15-51W
- LPW: 78-83
- SDCM: 3


4' Flush Lens  
625 Lumens per foot  
**Delivered Lumens: 2500lm**  
**Total System Watts: 30W**

Photometric performance is measured in accordance with IESNA LM-79.  
Visit [focalpointlights.com](http://focalpointlights.com) for complete photometric data.

fixture:

project:

**DETAILS**

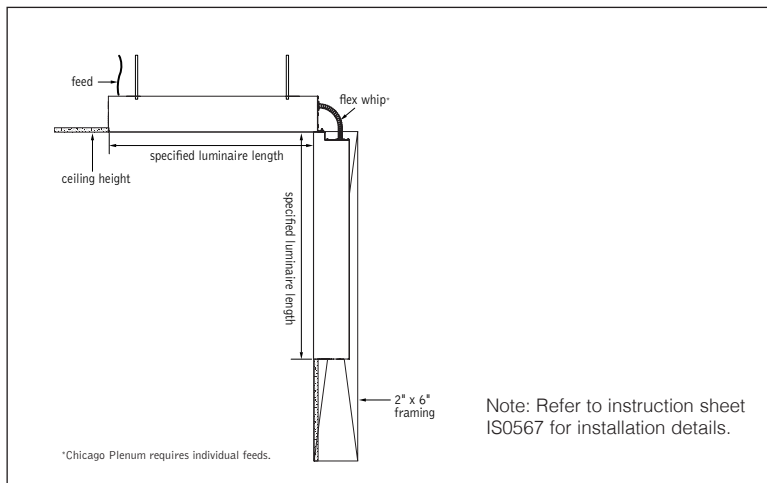

**SPECIFICATIONS**

**LED System**

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80 or CRI>90, 3SDCM. LED modules and drivers are replaceable from below.

**Construction**

One piece extruded aluminum housing. 20 Ga. steel end caps. Housing for new construction applications. XFW acceptable for use with wood, consult factory for Type IC availability. 2' unit weight: 18 lbs., 3' unit weight: 24 lbs., 4' unit weight: 30 lbs., 5' unit weight: 36 lbs.

**Optic**

Reflectors fabricated of 22 Ga. steel finished in High Reflectance White powder coat. Extruded acrylic lens .085" thick with satin finish, up to 8' continuous.

**Electrical**

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Dimming range 100% to 10%. Power factor > .9.

**Emergency Battery**

Emergency output - 10 watts for 90 minutes. Maximum mounting height: 18.8ft. See EM/EC Guide for default locations and ordering details.

**Labels**

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

**Finish**

Polyester powder coat applied over a multi-stage pre-treatment.

**Lumen Maintenance**

Reported: L70 > 61,000 hours                      Calculated: L70 at > 350,000 hours  
 L90 > 61,000 hours                                  L90 at > 90,000 hours

(Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)

**Reliability**

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

**Warranty**

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

**4' PERFORMANCE CHART**

Shielding	Lumens per Foot	Delivered Lumens	Tested System Watts	LPW
Flush Lens	375LF	1500	18	83
	625LF	2500	30	83
	875LF	3500	44	80
	1000LF	4000	51	78

Based on 3500K, 80 CRI, 4' lengths. Lumen multiplier: 90+ CRI = 0.87. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

**ORDERING**

<b>Luminaire Series</b> Seem 6 LED	FSM6L	<b>FSM6L</b>
<b>Shielding</b> Flush Satin Lens	FL	<b>FL</b>
<b>Lumen Output</b> 375 Lumens per foot (Not available with LU5 & LH1 Drivers)	375LF	
625 Lumens per foot (4' minimum with LU5 & LH1 Drivers)	625LF	
875 Lumens per foot (3' minimum with LU5 & LH1 Drivers)	875LF	
1000 Lumens per foot	1000LF	
<b>Color Temperature</b> 2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI or 90+ CRI	40K or 940K	
<b>Circuit</b> Single Circuit	1C	<b>1C</b>
<b>Voltage</b> UNV 120/277 Volt	UNV	<b>UNV</b>
<b>Control System &amp; Dimming Level</b> 0-10V - 10% Dimming	LD1	
0-10V - 1% Dimming	L11	
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming	LH1	
Lutron 5-Series EcoSystem (LDE5) - 5% Dimming	LU5	
DALI 1% Dimming	D11	
<b>Mounting</b> Wall to Ceiling Corner, pre-set for 1/2" Drywall	CXF1	
Wall to Ceiling Corner, pre-set for 5/8" Drywall	CXF2	
Wall to Ceiling Corner, set drywall thickness in field (Mounting equipment assembled in field)	CXFF	
Wall to Ceiling Corner, non-drywall hard surface	CXFN	
Wall to Ceiling Corner, wood	CXFW	
<b>Factory Options</b> Chicago Plenum	CP	
Emergency Circuit	_EC	
Emergency Battery Pack (4' minimum. See EM/EC Guide for default locations and ordering details.)	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish</b> Matte White Housing	WH	<b>WH</b>
<b>Luminaire Length</b> (Lengths are nominal) Specify luminaire/row length in 1' increments	X'CX'W	
Example: 12C6W= 12' in ceiling, 6' in wall		

# Seem® EM/EC Guide

FSM1, FSM1S, FSM1W, FSM2L-FL, FSM2L-FL2, FSM2LS, FSM2LW, FSM4L-FL/SR/SRXP, FSM4L-FL2, FSM4LS, FSM4LW, FSM4LP, FSM6L-FL/SR/SRXP\*



## DEFAULT LOCATIONS

- By default, EM/EC are located at the end (last section) of a run when one EM/EC location is specified, and at the start and end when two locations are specified.
- EM/EC illuminate entire sections from 4' to 8' in length.
- Feed location is at start of run. All EC's are fed individually at the end of each fixture segment.

### 1 EM/EC – END OF RUN



Ordering example: FSM4L-FL... **1EM-WH-36ft**

### 2 EM/EC – START & END OF RUN




Ordering example: FSM4L-FL... **2EM-WH-36ft**

## ALTERNATE LOCATIONS AND QUANTITIES

- If more than two locations are required, or specific locations within run need to be specified, indicate in the ordering string.

### ONE EM IN 3<sup>RD</sup> SECTION



Ordering example: FSM4L-FL... **1EM-3-WH-40ft**

### THREE EM IN 1<sup>ST</sup>, 3<sup>RD</sup> AND 6<sup>TH</sup> SECTIONS



Ordering example: FSM4L-FL... **3EM-1-3-6-WH-48ft**

## CUSTOM LENGTHS

- If partial illumination of emergency section is required, indicate quantity in ordering string and partial illumination in Order Notes. Drawing required.
- Longer lead times may apply.

Run length (ft)	Housing Configuration Section Lengths
9	5 + 4
10	6 + 4
11	7 + 4
12	8 + 4
13	8 + 5
14	8 + 6
15	8 + 7
16	8 + 8
17	8 + 5 + 4
18	8 + 6 + 4
19	8 + 7 + 4
20	8 + 8 + 4
21	8 + 8 + 5
22	8 + 8 + 6
23	8 + 8 + 7
24	8 + 8 + 8
25	8 + 8 + 5 + 4
26	8 + 8 + 6 + 4
27	8 + 8 + 7 + 4

Run length (ft)	Housing Configuration Section Lengths
28	8 + 8 + 8 + 4
29	8 + 8 + 8 + 5
30	8 + 8 + 8 + 6
31	8 + 8 + 8 + 7
32	8 + 8 + 8 + 8
33	8 + 8 + 8 + 5 + 4
34	8 + 8 + 8 + 6 + 4
35	8 + 8 + 8 + 7 + 4
36	8 + 8 + 8 + 8 + 4
37	8 + 8 + 8 + 8 + 5
38	8 + 8 + 8 + 8 + 6
39	8 + 8 + 8 + 8 + 7
40	8 + 8 + 8 + 8 + 8
41	8 + 8 + 8 + 8 + 5 + 4
42	8 + 8 + 8 + 8 + 6 + 4
43	8 + 8 + 8 + 8 + 7 + 4
44	8 + 8 + 8 + 8 + 8 + 4
45	8 + 8 + 8 + 8 + 8 + 5
46	8 + 8 + 8 + 8 + 8 + 6
47	8 + 8 + 8 + 8 + 8 + 7
48	8 + 8 + 8 + 8 + 8 + 8

Standard run configurations, consult factory for custom configurations.

\*Recessed and suspended only. Does not include direct/indirect, pop-down lens or asymmetric options.