

Seem® 6

LED WALL TO CEILING CORNER



trimless mud-in




end detail



pop-down lens companion

DIMENSIONAL DATA

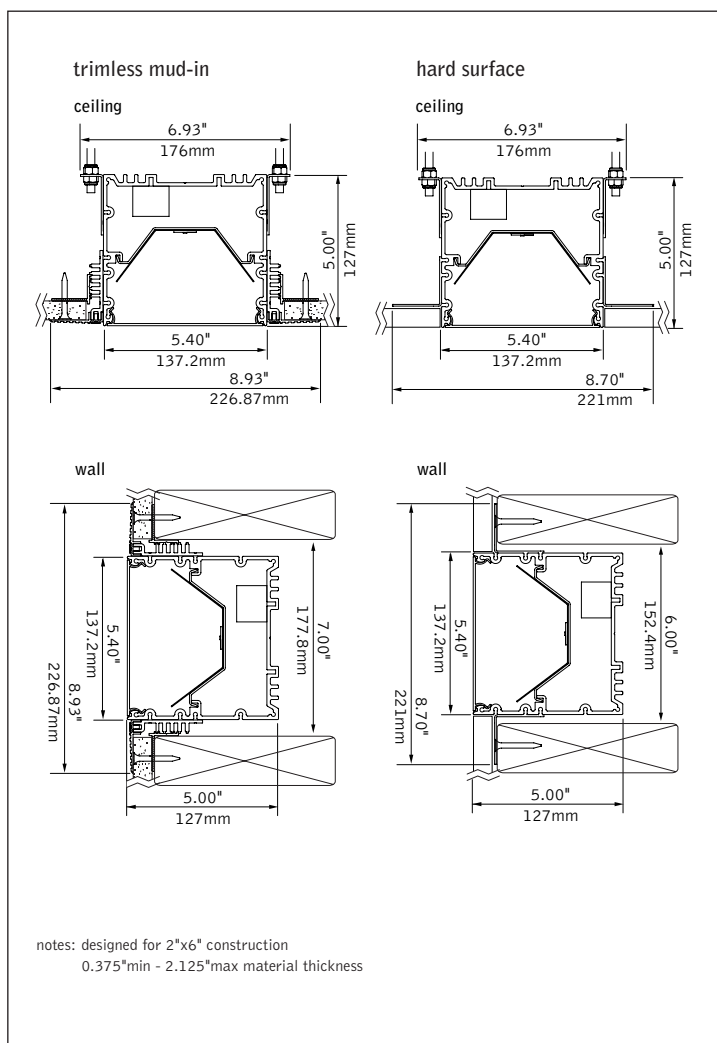

FEATURES

Narrow extruded aluminum 6" aperture recessed slot LED that transitions from wall to ceiling.


Clean and minimal trimless drywall mounting.

Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.

LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.

Choice of output levels to meet a wide variety of application needs.


PERFORMANCE

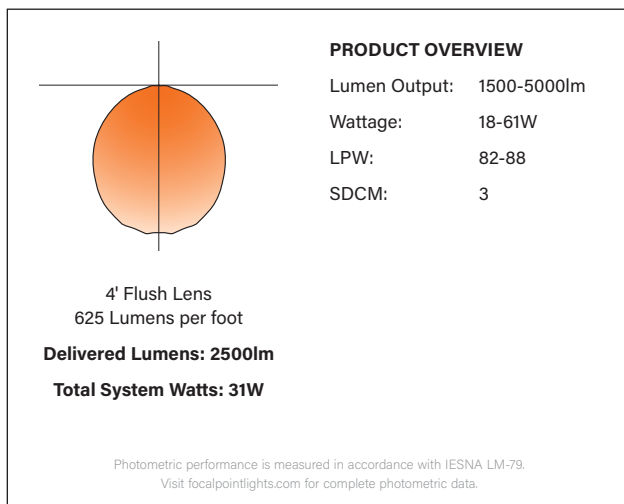

fixture:

project:

DETAILS

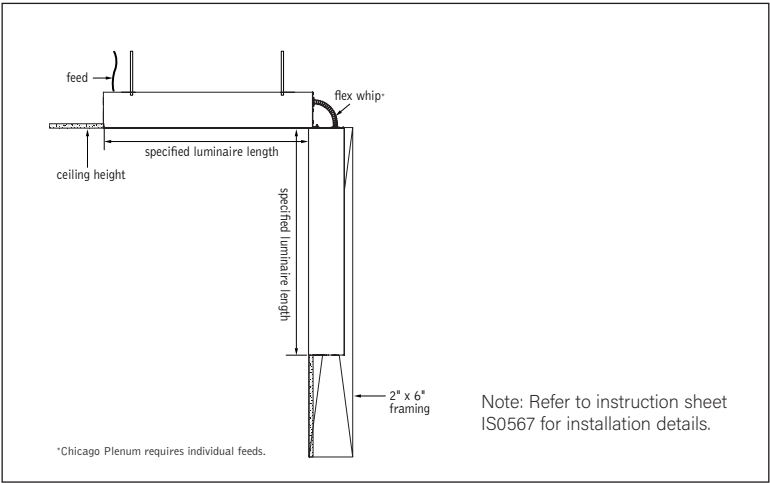

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80 or CRI>90, 3SDCM. 3500K and 4000K with CRI>90 have a cyanosis observation index (COI) of 3.3 or less. LED modules and drivers are replaceable from below.

Construction

One piece extruded aluminum housing. 20 Ga. steel end caps. Housing for new construction applications. XFW acceptable for use with wood, consult factory for Type IC availability. 2' unit weight: 18 lbs., 3' unit weight: 24 lbs., 4' unit weight: 30 lbs., 5' unit weight: 36 lbs.

Optic

Reflectors fabricated of 22 Ga. steel finished in High Reflectance White powder coat. Extruded acrylic lens .085" thick with satin finish, up to 8' continuous.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Dimming range 100% to 10%.Power factor > .9.

Emergency Battery

Emergency output - 10 watts for 90 minutes. Maximum mounting height: 18.8ft. See EM/EC Guide for default locations and ordering details.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.

Lumen Maintenance

Reported: L70 > 61,000 hours Calculated: L70 at > 350,000 hours
 L90 > 61,000 hours L90 at > 90,000 hours

(Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

4' PERFORMANCE CHART

Shielding	Lumens per Foot	Delivered Lumens	Tested System Watts	LPW
Flush Lens	375LF	1500	18	88
	625LF	2500	31	87
	875LF	3500	44	85
	1000LF	4000	51	85
	1125LF	4500	54	84
	1250LF	5000	61	82

Based on 3500K, 80 CRI, 4' lengths. Lumen multiplier: 90+ CRI = 0.87. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

Focal Point LLC reserves the right to change specifications for product improvement without notification.

ORDERING

Luminaire Series		FSM6L
Seem 6 LED	FSM6L	
Shielding		FL
Flush Satin Lens	FL	
Lumen Output		
375 Lumens per foot	375LF	
(Not available with LU5 & LH1 Drivers)		
625 Lumens per foot	625LF	
(4' minimum with LU5 & LH1 Drivers)		
875 Lumens per foot	875LF	
(3' minimum with LU5 & LH1 Drivers)		
1000 Lumens per foot	1000LF	
1125 Lumens per foot	1125LF	
1250 Lumens per foot	1250LF	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI or 90+ CRI	40K or 940K	
Circuit		1C
Single Circuit	1C	
Voltage		UNV
UNV 120/277 Volt	UNV	
Control System & Dimming Level		
0-10V - 10% Dimming	LD1	
0-10V - 1% Dimming	L11	
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming	LH1	
Lutron 5-Series EcoSystem (LDE5) - 5% Dimming	LU5	
DALI 1% Dimming (1000LF max.)	D11	
Mounting		
Wall to Ceiling Corner, pre-set for 1/2" Drywall	CXF1	
Wall to Ceiling Corner, pre-set for 5/8" Drywall	CXF2	
Wall to Ceiling Corner, set drywall thickness in field (Mounting equipment assembled in field)	CXFF	
Wall to Ceiling Corner, non-drywall hard surface	CXFN	
Wall to Ceiling Corner, wood	CXFW	
Factory Options		
Chicago Plenum (Not available with Flex Whip)	CP	
Emergency Circuit	_EC	
Emergency Battery Pack (4' minimum. See EM/EC Guide for default locations and ordering details.)	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
Finish		WH
Matte White Housing	WH	
Luminaire Length (Lengths are nominal)		
Specify luminaire/row length in 1' increments	X'CX'W	
Example: 12C6W= 12' in ceiling, 6' in wall		