


Seem® 6

LED POP-DOWN LENS



trimless mud-in

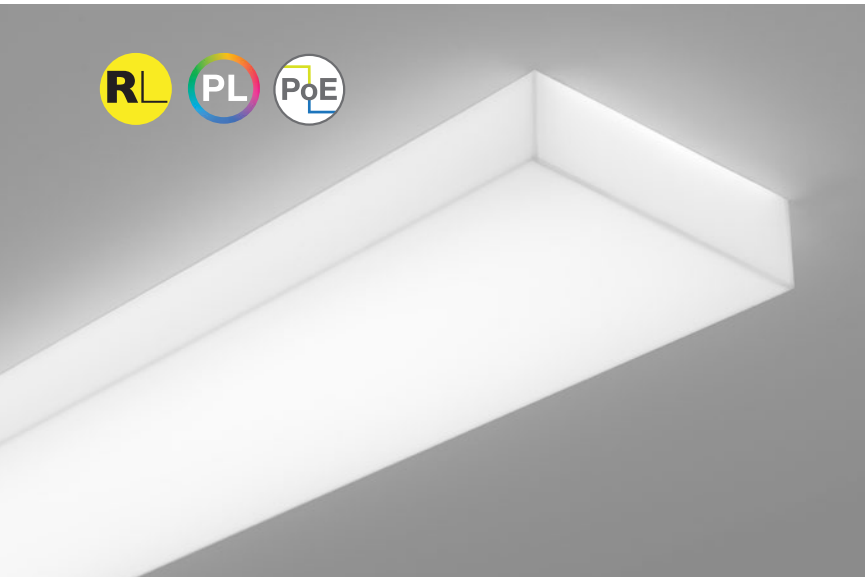

grid




flush lens companion



regress lens companion


DIMENSIONAL DATA

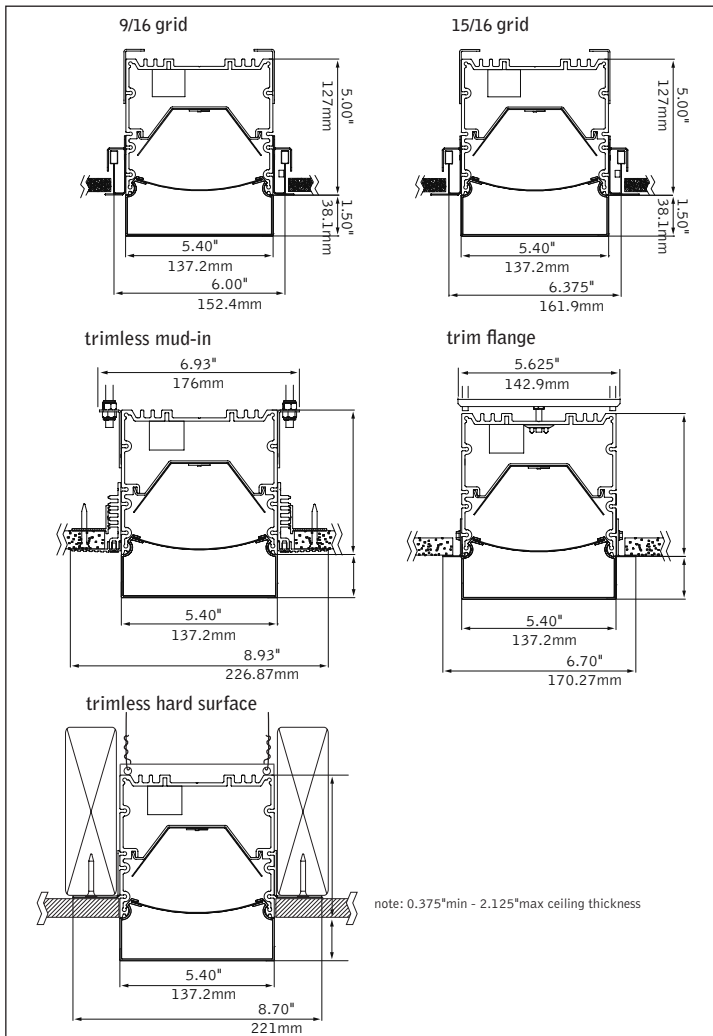

FEATURES

- 6" aperture recessed LED slot with 1.5" pop-down lens.
- Integrates with ceiling in a variety of mounting styles for a clean aesthetic.
- Compatible with common pre-engineered grid ceiling systems requiring luminaires fitting into a 6" slot.
- Dimensional frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.
- LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.
- Preferred Light: Lighting for better color rendition and human preference.

PERFORMANCE



PRODUCT OVERVIEW

Lumen Output: 1500-4000lm

Wattage: 18-51W

LPW: 72-77

SDCM: 3


4' Flush Lens
 625 Lumens per foot
Delivered Lumens: 2500lm
Total System Watts: 30W

Photometric performance is measured in accordance with IESNA LM-79.
 Visit focalpointlights.com for complete photometric data.

fixture:

project:

DETAILS

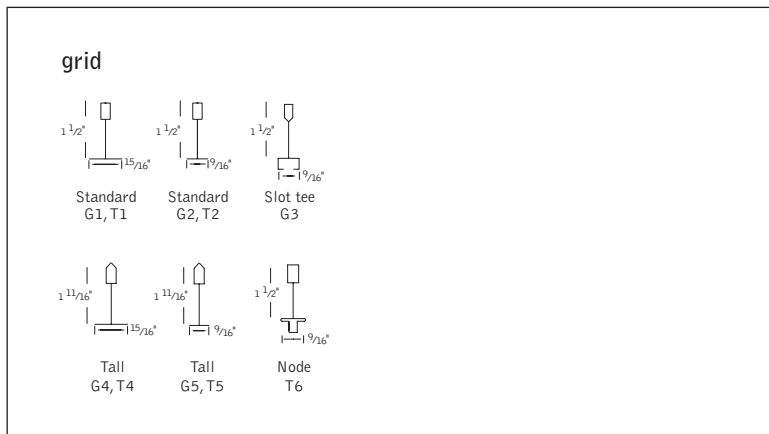

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80 or CRI>90, 3SDCM. 3500K and 4000K with CRI>90 have a cyanosis observation index (COI) of 3.3 or less. LED modules and drivers are replaceable from below.

Construction

One piece extruded aluminum housing. 20 Ga. steel end caps. Housing for new construction applications. XFW acceptable for use with wood, consult factory for Type IC availability. 2' unit weight: 18 lbs., 3' unit weight: 24 lbs., 4' unit weight: 30 lbs., 5' unit weight: 36 lbs.

Optic

Reflectors fabricated of 22 Ga. steel finished in High Reflectance White powder coat. Extruded acrylic lens .085" thick with satin finish, up to 8' continuous.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Dimming range 100% to 10%. Power factor > .9. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Emergency Battery

Emergency output - 10 watts for 90 minutes. Maximum mounting height: 18ft. Emergency Circuit maximum mounting height: 21ft.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.

Lumen Maintenance

Reported: L70 > 61,000 hours Calculated: L70 at > 350,000 hours
 L90 > 61,000 hours L90 at > 90,000 hours
 (Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

4' PERFORMANCE CHART

Shielding	Lumens per Foot	Delivered Lumens	Tested System Watts	LPW
1.5" Pop-Down lens	375LF	1500	18	77
	625LF	2500	30	77
	875LF	3500	44	74
	1000LF	4000	51	72

Based on 3500K, 80 CRI, 4' lengths. Lumen multipliers: Preferred Light = 0.65, 90+ CRI = 0.87. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

Focal Point LLC reserves the right to change specifications for product improvement without notification.

ORDERING

Luminaire Series	FSM6L	FSM6L
Seem 6 LED	FSM6L	
Shielding		PD15
1.5" Pop-Down Lens	PD15	
Lumen Output		
375 Lumens per foot <small>(Not available with LU5 & LH1 Drivers)</small>	375LF	
625 Lumens per foot <small>(4' minimum with LU5 & LH1 Drivers)</small>	625LF	
875 Lumens per foot <small>(3' minimum with LU5 & LH1 Drivers)</small>	875LF	
1000 Lumens per foot	1000LF	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI or 90+ CRI	40K or 940K	
3500K, Preferred Light <small>(6' increments only)</small>	P35K	
Circuit		1C
Single Circuit	1C	
Voltage		
120/277 UNV Volt	UNV	
Low voltage	LV	
Control System & Dimming Level		
0-10V - 10% Dimming	LD1	
0-10V - 1% Dimming	L11	
Low-voltage, PoE compatible <small>(No driver. Not available with EM or EC. LV Voltage only.)</small>	LVN	
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming	LH1	
Lutron 5-Series EcoSystem (LDE5) - 5% Dimming	LU5	
DALI 1% Dimming	D11	
Ceiling Configurations		
Std. 15/16" Lay-in	G1	
Std. 15/16" Tegular	T1	
Std. 9/16" Lay-in	G2	
Std. 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in	G4	
Tall 15/16" Tegular	T4	
Tall 9/16" Lay-in	G5	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
Trim Flange Drywall	TF	
Trim Flange Wood	TFW	
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	
Mud-in Trimless, set thickness in field <small>(Mounting equipment assembled in field)</small>	XFF	
Non-Drywall Hard Surface	XFN	
Hard Surface, Wood	XFW	
Factory Options		
Chicago Plenum <small>(Not available with Flex Whip)</small>	CP	
Emergency Circuit	EC	
Emergency Battery Pack <small>(4' lengths or longer)</small>	EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
Finish		WH
Matte White Housing	WH	
Luminaire Length <small>(Lengths are nominal)</small>		
	2'	2'
	3'	3'
	4'	4'
	5'	5'
	6'	6'
	7'	7'
	8'	8'
<small>(Smaller increments available. Consult factory for details.)</small>		

For more information visit focalpointlights.com/reference or consult factory.