


acrylic diffuser



microglow

## DIMENSIONAL DATA

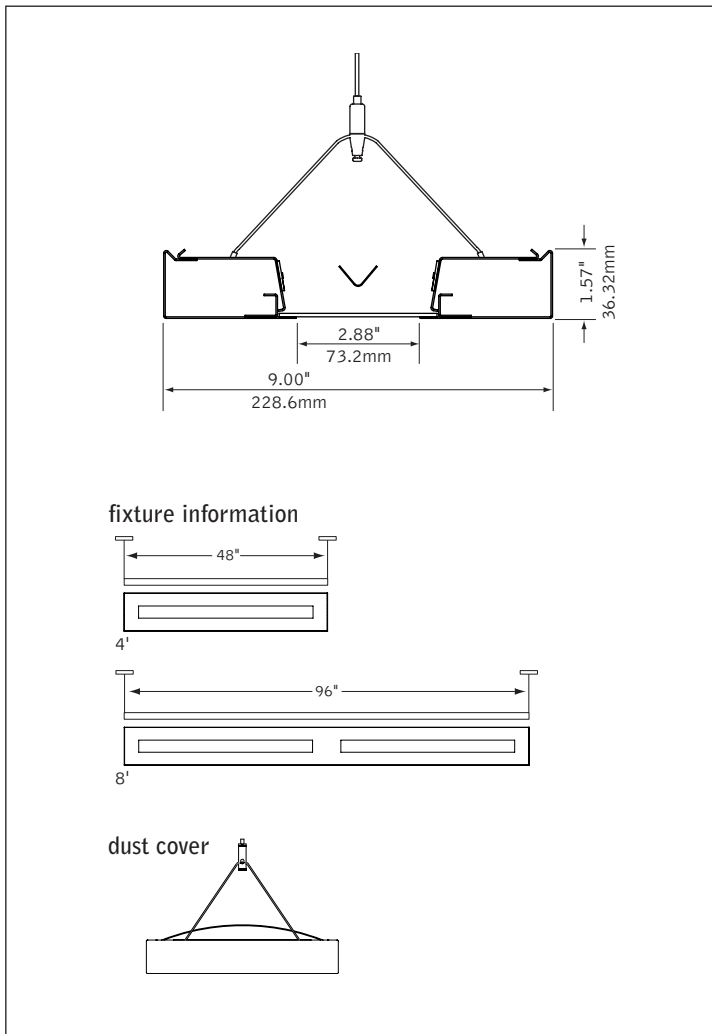

## FEATURES

Low profile suspended direct/indirect LED luminaire.

Excellent choice for lower ceiling applications and areas where ceiling uniformity is important.

Features Gradient Optic which softens cut-off line on surrounding walls and other vertical structures.


MicroGlow lens offers cutoff & brightness control to support comfortable environments.

35% energy savings over comparable fluorescent versions.

Connected Solutions: Integrates with wired and wireless building lighting control systems.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.


## PERFORMANCE

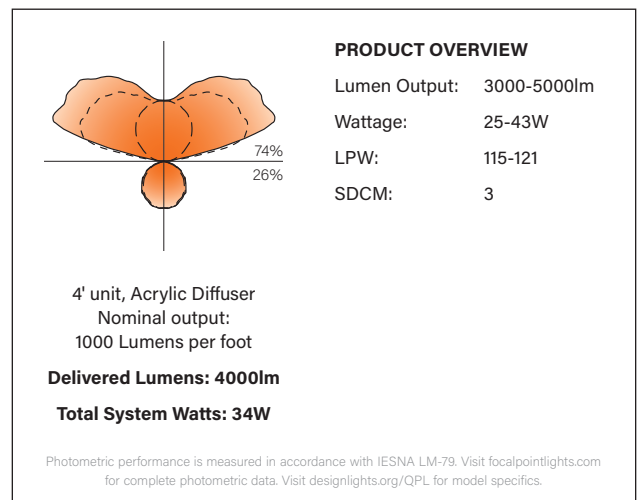

fixture:

project:

**SUSPENSION INFORMATION**

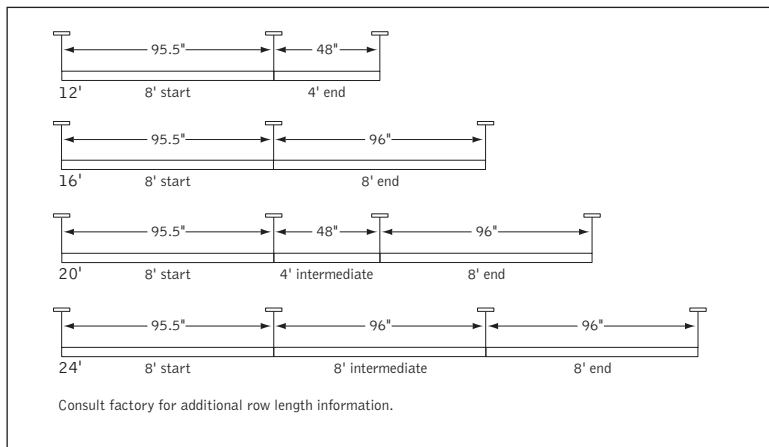

**SPECIFICATIONS**

**LED Systems**

Linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. Available in 3000K, 3500K, 4000K with CRI>80, 3SDCM. LED boards and drivers are replaceable.

**Construction**

One-piece 20 Ga. steel housing. Steel end caps attach flush to housing. For row installation, internal brackets form hairline joint. All luminaires are provided with Y-cable suspension mounted on 48" or 96" centers. 4' unit weight: 22 lbs., 8' unit weight: 40 lbs.

**Optic**

Reflector fabricated of 22 Ga. steel finished in high reflectance matte white. 24 Ga. steel beam softening filter finished in matte white powder coat. .125" thick acrylic lens.

**Electrical**

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Power factor > .9. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires. PoE runs require an independent PoE node and power feed for each luminaire section.

**Emergency**

Emergency output —12W for 90 minutes. Maximum mounting height: 11.25ft. Emergency Circuit maximum mounting height: 15.00ft. Emergency Circuit with Connected Solutions (NLT1, ENL1, CLM1, CLMZ1, DLM1) shipped standard with leads to connect UL924 compliant device, by others. See EM/EC Guide on page 4 for default locations and ordering details.

**Labels**

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

**Finish**

Polyester powder coat applied over a multi-stage pre-treatment. Canopy finished in Matte Satin White.

**Lumen Maintenance**

Reported: L70 at >60,000 hours                      Calculated: L70 at 130,000 hours  
 Reported: L90 at 40,000 hours                      Calculated: L90 at 40,000 hours  
 Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

**Reliability**

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

**Warranty**

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

**4' PERFORMANCE CHART**

Lumens per Foot	Delivered Lumens	Tested System Watts	LPW
750LF	3000	25	121
875LF	3500	29	120
1000LF	4000	34	118
1125LF	4500	38	117
1250LF	5000	43	115

Based on 3500K. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%

Focal Point LLC reserves the right to change specifications for product improvement without notification.

**ORDERING**

**Fixture Series**

Twelve LED FTWLS

**Shielding**

Acrylic Diffuser AC

MicroGlow Prismatic Lens MG

**Lumen Output**

750 Lumens per foot 750LF  
 875 Lumens per foot 875LF  
 1000 Lumens per foot 1000LF  
 1125 Lumens per foot 1125LF  
 1250 Lumens per foot 1250LF

**Color Temperature**

3000K, 80+CRI 30K  
 3500K, 80+CRI 35K  
 4000K, 80+CRI 40K

**Circuits**

Single Circuit 1C

**Voltage**

UNV 120/277 Volt UNV  
 347 Volt 347  
(LD1 only)  
 Low Voltage LV

**Control System & Dimming Level**

0-10V - 1% Dimming L11  
 0-10V - 10% Dimming LD1  
 Low Voltage, PoE compatible LVN

(No driver. Not available with EM or EC. LV Voltage only)

Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming LH1

DALI - 1% Dimming D11  
 Step Dimming SD5

(Not available with 750LF)

Acuity nLight - 1% Dimming NLT1

Enlighted Smart Sensor - 1% Dimming ENL1

Osram Connected Lighting Module for ENCELUM systems - 1% Dimming CLM1

(Compatible with Osram ENCELUM and ENCELUM EDGE systems only)

Osram Connected Lighting Module for ZigBee Wireless Networks - 1% Dimming CLMZ1

(Not compatible with Osram ENCELUM systems)

Wattstopper DLM - 1% Dimming DLM1

**Mounting**

12" Cable Suspension J12

24" Cable Suspension J24

48" Cable Suspension J48

96" Cable Suspension J96

(Add "P" for Chicago plenum. Eg: JPI2, CPI2)

(Specify one of the following in place of "J"

C - for 5" canopies at non-feed locations.

CS - for sloped ceilings.)

Stem Mount S\_\_

(Specify stem length in inches Standard stem lengths 6, 12, 18, 24, 36, 48". White stems and canopies supplied standard. For non-white housings: to match stem and housing, add M to ordering code (S12M). To match stem, canopy and housing, add MC to ordering code (S12MC)

**Factory Options**

Dust Cover DST

Emergency Battery Pack\* \_EM

Emergency Circuit\* \_EC

See EM/EC Guide for default locations and ordering details.)

**Finish**

Titanium Silver TS

Matte Satin White WH

**Fixture Run Length**


4' 4'  
 8' 8'  
 12' (8'+4') 12'  
 16' (8'+8') 16'  
 20' (8'+4'+8') 20'  
 24' (8'+8'+8') 24'

(Individual units may not be field modified for continuous row mount. Longer run lengths available in 4' increments.)



Options in orange qualify for the Quickship program, 400' total. Refer to Quickship Guide for complete details including EM/EC options.


Focal Point provides flexibility in meeting the needs of each project by integrating with several building lighting control systems. A variety of sensors, drivers and other components can be specified that allow the luminaires to communicate with wired and wireless networks. All zoning can be digitally reconfigured through the application software. Daylight harvesting, occupancy sensing, integration with HVAC systems, and individual controls enable the monitoring and modulating of light levels and temperature in order to save energy, reduce costs and maximize occupants' comfort. All Connected Solutions luminaires require a compatible building control system.†



nLight® provides a two-way wired digital lighting system allowing for on/off and dimming functionality, occupancy sensing, and multi-zone daylight harvesting.


Acuity nLight - 1% Dimming (NLT1)  
Acuity Model #nEPS-60-IO

CAT-5 Cable provided by others. Serial labels will be provided on outside of luminaires and control unit.



Enlighted smart sensor allows for occupancy sensing, daylight harvesting, energy usage, temperature and light level control. Communicates wirelessly with the Enlighted network.


Enlighted Smart Sensor - 1% Dimming (ENL1)  
Enlighted Model #SU-5E-IOT



Connected Lighting Module (CLM) enables each luminaire to be independently controlled and configured. Communicates wirelessly with Daintree Networks®, Osram ENCELIIUM®, Osram ENCELIIUM EDGE™, and other networks using the ZigBee® HA communication protocol to allow for on/off and dimming functionality, occupancy sensing and multi-zone daylight harvesting.

Osram CLM - 1% Dimming (CLM1 & CLMZ1)  
Osram Model #ZBHA-CLM DIM


Serial labels will be provided on outside of luminaires and control unit.



A Digital Lighting Management (DLM) system that provides two-way wired communication between networked luminaires and control system to allow for on/off and dimming functionality, occupancy sensing and multi-zone daylight harvesting.


Wattstopper DLM - 1% Dimming (DLM1)  
Wattstopper Model #LMFC-011

Segment Network Wire provided by others. Serial labels will be provided on outside of luminaires and control unit.



A two-way digital network that enables on/off and dimming functionality, occupancy sensing, and multi-zone daylight harvesting working with Quantum®, Energi Savr Node™, and Energi TriPak® using EcoSystem® communication protocol.

Lutron Hi-Lume EcoSystem - 1% Dimming (LH1)  
Lutron Model #LDE1



A two-way digital network that enables on/off and dimming functionality, occupancy sensing, and multi-zone daylight harvesting. Communicates with Züm wireless and SpaceBuilder working with Züm hub scheduling or FUSION management.

DALI - 1% Dimming (D11)  
0-10V - 1% Dimming (L11)

Note: 0-10V is not a digital network but is compatible with Creston Züm™ system.

## CONNECTED SOLUTIONS DETAILS

Connected Solution	Model #	Protocol	Compatible Networks*	Occupancy	Daylight	Temperature Reporting	Communication to Luminaire	Drivers
Acuity nLight (NLT1)	nEPS-60-IO**	nLight	nLight	Enabled	Enabled	No	Wired	<b>eldoLED ECoDrive</b> , <b>eldoLED SOLOdrive</b>
Crestron (D11, L11)	Specified Driver	DALI 0-10V	Crestron Züm Wireless & SpaceBuilder	Enabled	Enabled	No	Wired	<b>eldoLED ECoDrive (DALI)</b> , <b>Advance by Signify (0-10V)</b>
Enlighted Smart Sensor (ENL1)	SU-5E-IOT**	Enlighted RF	Enlighted	Integrated	Integrated	Yes	Wireless	<b>Advance by Signify</b> , <b>Osram Optotronic</b>
Legrand Wattstopper DLM (DLM1)	LMFC-011**	DLM	DLM	Enabled	Enabled	No	Wired	<b>Advance by Signify</b> , <b>Osram Optotronic</b>
Lutron EcoSystem (LH1)	LDE1**	EcoSystem	Quantum, Energi Savr Node, Energi TriPak	Enabled	Enabled	No	Wired	<b>Lutron Hi-Lume</b>
Osram CLM for ENCELIIUM systems (CLM1)	ZBHA-CLM**	ZigBee HA	Osram ENCELIIUM & ENCELIIUM EDGE	Enabled	Enabled	No	Wireless	<b>Osram Optotronic</b>
Osram CLM for ZigBee Wireless Networks (CLMZ1)	ZBHA-CLM**	ZigBee HA	Daintree Networks & open ZigBee Networks	Enabled	Enabled	No	Wireless	<b>Osram Optotronic</b>

\*Not all compatible networks may be listed. \*\*For performance data and additional control system details please visit the connected solutions manufacturer websites. Primary drivers are listed in **bold**. To specify a particular driver please consult factory.  
†Controls systems supplied by others.

# EM/EC Guide


TWELVE LED - FTWLS



## DEFAULT LOCATIONS

- By default, EM/EC are located at the end (last section) of a run when one EM/EC location is specified, and at the start and end when two locations are specified.
- EM/EC illuminate entire sections from 4' to 8' in length.
- Feed location is at start of run. All EC's are fed individually at the end of each fixture segment.

### 1 EM/EC - END OF RUN



Ordering example: FTWLS-AC... **1EM-WH-36ft**

### 2 EM/EC - START & END OF RUN




Ordering example: FTWLS-AC... **2EM-WH-36ft**

## ALTERNATE LOCATIONS AND QUANTITIES

- If more than two locations are required, or specific locations within run need to be specified, indicate in the ordering string.

### ONE EM IN 3<sup>RD</sup> SECTION



Ordering example: FTWLS-AC... **1EM-3-WH-40ft**

### THREE EM IN 1<sup>ST</sup>, 3<sup>RD</sup> AND 6<sup>TH</sup> SECTIONS



Ordering example: FTWLS-AC... **3EM-1-3-6-WH-48ft**

## CUSTOM LENGTHS

- If partial illumination of emergency section is required, indicate quantity in ordering string and partial illumination in Order Notes. Drawing required.
- Longer lead times may apply.

Run length (ft)	Housing Configuration Section Lengths
12	8 + 4
16	8 + 8
20	8 + 4 + 8
24	8 + 8 + 8
28	8 + 8 + 8 + 4

Run length (ft)	Housing Configuration Section Lengths
32	8 + 8 + 8 + 8
36	8 + 8 + 8 + 8 + 4
40	8 + 8 + 8 + 8 + 8
44	8 + 8 + 8 + 8 + 8 + 4
48	8 + 8 + 8 + 8 + 8 + 8

Standard run configurations, consult factory for custom configurations.