



perforated



slotted




solid



wall mount
companion

DIMENSIONAL DATA

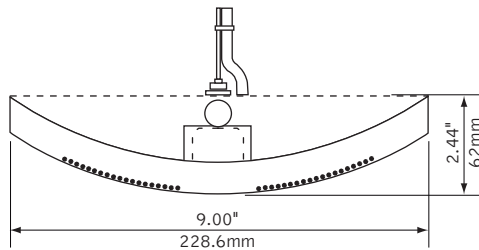

lampping options



T5 LAMPS




T5HO LAMPS




T8 LAMPS

fixture information



4' (4' 10")



8' (8' 10")


FEATURES

Suspended linear indirect fluorescent with contoured housing and end caps.

One-piece steel housing with 5" die-cast end caps.

Verve™ is an excellent choice for any open office application.

PERFORMANCE



Perforated Housing
1-Lamp T5HO

97.4% % Efficient

1150 cd @ 180°

PRODUCT OVERVIEW

Lumen Output: 5309-12754lm

Wattage: 62-177W


Lamping: T5, T5HO, T8

Visit focalpointlights.com for complete photometric data.

fixture:

project:

SUSPENSION INFORMATION

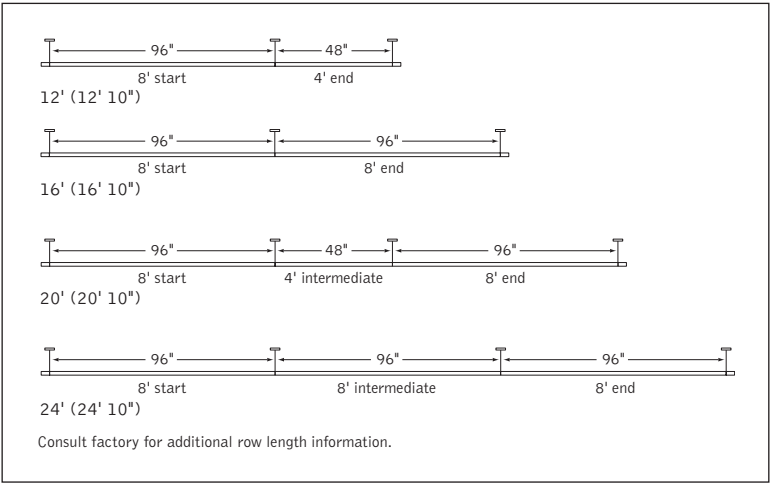

SPECIFICATIONS

Construction

One-piece 20 Ga. steel housing available solid or with perforated or slotted pattern. Perforated or slotted housing includes white acrylic insert. Die-cast 5" end cap standard. Optional short 1" end cap also available. For row installation, internal brackets form hairline joint. Standard lengths are available in 4' and 8'. All luminaires are provided with single point aircraft cable suspension mounted on 48" or 96" centers. 4' unit weight: 20 lbs., 8' unit weight: 30 lbs.

Optic

Die-formed 24 Ga. steel reflector, finished in high reflectance white powder coat (93% min. reflectance).

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Factory installed SJT power cord at feed location is included. Electronic ballasts are thermally protected and have a Class "P" rating. Optional dimming ballasts available.

Labels

UL and cUL listed.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.. Canopy finished in Matte Satin White.

ORDERING

Fixture Series	FV2S	
Verve II	FV2S	
Shielding		
Perforated Housing	PS	
Slotted Housing	SL	
Solid Housing	SD	
Lamping		
2 Lamp T5	2T5	
3 Lamp T5	3T5	
1 Lamp T5HO	1T5HO	
2 Lamp T5HO	2T5HO	
3 Lamp T5HO	3T5HO	
2 Lamp T8	2T8	
3 Lamp T8	3T8	
Circuit		
Single Circuit	1C	
Dual Circuit	2C	
(Multiple lamp luminaires only)		
Voltage		
120 Volt	120	
277 Volt	277	
347 Volt	347	
(Consult factory for dimming options)		
120/277 UNV	UNV	
(Not available with 1-lamp T5HO dimming or EM)		
Ballast		
Electronic Program Start <10% THD	S	
0-10V	D7	
Lutron 1% 3-wire	DH	
Lutron 1% H-Series	DK	
Mounting		
24" Cable Suspension	C24	
48" Cable Suspension	C48	
96" Cable Suspension	C96	
(Add "P" for Chicago plenum. Eg: CP12)		
(Specify one of the following in place of "C")		
J - for 2' canopies at non-feed locations.		
CS - for sloped ceilings.)		
Factory Options		
Dust Cover	DC	
Emergency Circuit	*EC	
Emergency Battery Pack	*EM	
HLR/GLR Fuse	FU	
Short 1" end cap	SE	
Include 3000K Lamp*	L830	
Include 3500K Lamp*	L835	
Include 4100K Lamp*	L841	
(Sensor options available – consult factory)		
Finish		
Matte White Housing	WH	
Titanium Silver	TS	
Luminaire Length		
4'	4'	
8'	8'	
12' (8'+4')	12'	
16' (8'+8')	16'	
20' (8'+4'+8')	20'	
24' (8'+8'+8')	24'	