






Quickship and Quickship RED give you access to the products you need with the speed that you require. Made-to-order luminaires are available for shipment in 2, 5, or 10 days and, when the job calls for unique designs, our engineering team and US-based manufacturing facility are also here to support you with custom luminaires.

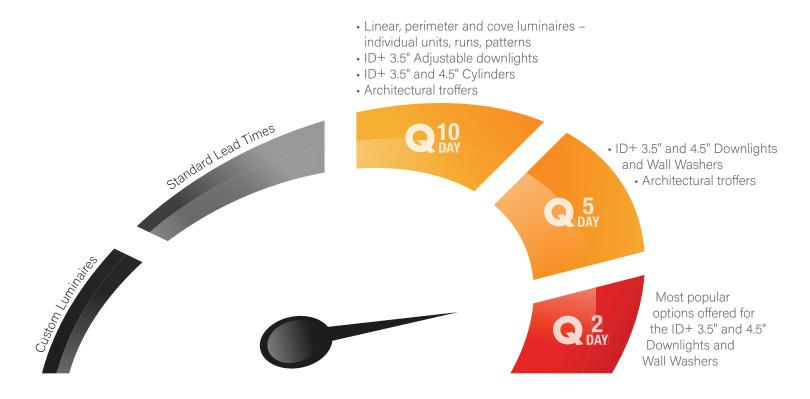

Learn more at focalpointlights.com/Quickship





Need downlights fast? Look no further! Quickship Red offers 2-day lead time on the most popular options for made-to-order ID+ 3.5" and 4.5" Downlights & Wall Washers.

Now, that's flexibility. Very short lead times on architectural grade downlights and the ability to select the options that are right for the job. Quickship Red is not a stock program, it's a program that's tailored to fit your needs and your schedule.

Discover all the options offered in this guide and consult the Quickship *RED Policies* at the back.



ID+ DOWNLIGHTS

ID+ 3.5" Downlight & Wal	l Wash	05
ID+ 3.5"x 3.5" Downlight 8	k Wall Wash	.07
ID+ 4.5" Downlight & Wal	l Wash	
ID+ 4.5"x 4.5" Downlight 8	k Wall Wash	11

FEATURE KEY









CONTRACTOR SUPPORT

In addition to our Quickship and Quickship Red programs, we offer a host of resources in the Contractor Zone of our website, including installation videos and quick access to our Field Service Team.

Learn more at focalpointlights.com/contractorzone



ID+ 3.5" DOWNLIGHT & WALL WASH






Housing Ordering		
ID+ 3.5" Downlight	_	FLC3D
Trim Type: Round Overlap	_	RO
Color Options: Standard White, 80 CRI	_	SW
Lumen Output		
1100 Lumen	1100L	
1500 Lumen	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	_	LD1
Housing		
Thermally Protected, Non-IC / Airtight	_	T
Factory Options		
Bar Hangers	BH	
Trim & LED Module		
Aperture: 3.5" Round Reflector	_	LC3
Trim Type: Round Overlap	_	RO
Color Options: Standard White, 80 CRI	_	SW
Lumen Output (Trim & housing output must match)		
1100 Lumen	1100L	
1500 Lumen	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Tall Cone with 50° cut-off	_	DNT
Distribution: Wide Flood	_	WFL
Finish: Clear Diffuse	_	CD
Flange Finish: White Painted	_	WP



2 DAY: 200 pieces or less



Housing Ordering		
ID+ 3.5" Wall Wash	_	FLC3W
Trim Type: Round Overlap	_	RO
Color Options: Standard White, 80 CRI	_	SW
Lumen Output		
1100 Lumen	1100L	
1500 Lumen	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	_	LD1
Housing Type		
Thermally Protected, Non-IC	_	T
Factory Options		
Bar Hangers	ВН	
Trim & LED Module		
Aperture: 3.5" Round Reflector		LC3
Trim Type: Round Overlap	_	RO
Color Options: Standard White, 80 CRI	_	SW
Lumen Output (Trim & housing output must match)		
1100 Lumen	1100L	
1500 Lumen	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Short Cone with 60° cut-off	-	wws
Finish: Clear Diffuse	_	CD
Flange Finish: White Painted	_	WP





ID+ 3.5" x 3.5" DOWNLIGHT & WALL WASH





Housing Ordering		
ID+ 3.5"x3.5" Downlight	_	FLC33D
Trim Type: Square Die-Cast Overlap	_	SDO
Color Options: Standard White, 80 CRI	_	SW
Lumen Output		
1100 Lumen	1100L	
1500 Lumen	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	_	LD1
Housing Type		
Thermally Protected, Non-IC / Airtight	_	T
Factory Options		
Bar Hangers	ВН	
Trim & LED Module		
Aperture: 3.5" Square Reflector	_	LC33
Trim Type: Square Die-Cast Overlap	_	SDO
Color Options: Standard White, 80 CRI	_	SW
Lumen Output (Trim & housing output must match)		
1100 Lumen	1100L	
1500 Lumen	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Tall Cone with 50° cut-off	_	DNT
Distribution: Wide Flood	_	WFL
Finish: Clear Diffuse	_	CD
Flange Finish: White Painted		WP



2 DAY: 200 pieces or less



Housing Ordering		
ID+ 3.5"x3.5" Wall Wash	_	FLC33W
Trim Type: Square Die-Cast Overlap	_	SDO
Color Options: Standard White, 80 CRI	_	sw
Lumen Output		
1100 Lumen	1100L	
1500 Lumen	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	_	LD1
Housing Type		
Thermally Protected, Non-IC	_	Т
Factory Options		
Bar Hangers	ВН	
Trim & LED Module		
Aperture: 3.5" Square Reflector		LC33
Trim Type: Square Die-Cast Overlap	_	SDO
Color Options: Standard White, 80 CRI	_	SW
Lumen Output (Trim & housing output must match)		
1100 Lumen	1100L	
1500 Lumen	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Short Cone with 60° cut-off	_	wws
Finish: Clear Diffuse		CD
Flange Finish: White Painted	_	WP



ID+ 4.5" DOWNLIGHT & WALL WASH





Housing Ordering

Housing Ordering		
ID+ 4.5" Downlight	_	FLC4D
Trim Type: Round Overlap	_	RO
Color Option: Standard White, 80 CRI	_	sw
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	_	LD1
Housing Type: Thermally Protected	_	Т
Factory Options		
Bar Hangers	BH	
Trim & LED Module		
Aperture: 4.5" Round Reflector	_	LC4
Trim Type: Round Overlap	_	RO
Lumen Output (Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Downlight with 50° cut-off		DN
Distribution: Wide Flood	_	WFL
Reflector Color: Clear Diffuse	_	CD
Flange Finish: White Painted	_	WP



2 DAY: 200 pieces or less



Housing Ordering

Housing Ordering		
ID+ 4.5" Downlight	_	FLC4W
Trim Type: Round Overlap	_	RO
Color Option: Standard White, 80 CRI	_	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	_	LD1
Housing Type: Thermally Protected	_	T
Factory Options		
Bar Hangers	ВН	
Trim & LED Module		
Aperture: 4.5" Round Reflector	_	LC4
Trim Type: Round Overlap	_	RO
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
Color Temperature		
3000K, 80+ CRI	30K	\overline{A}
3500K, 80+ CRI	35K	
Optic: Wall Wash	_	ww
Reflector Color: Clear Diffuse	_	CD
Flange Finish: White Painted	_	WP





ID+ 4.5" x 4.5" DOWNLIGHT & WALL WASH





Housing Ordering

Housing Ordering		
ID+ 4.5" x 4.5" Downlight	_	FLC44D
Trim Type: Square Overlap	_	SO
Color Option: Standard White, 80 CRI	_	sw
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	_	LD1
Housing Type: Thermally Protected	_	Т
Factory Options		
Bar Hangers	BH	
Trim & LED Module		
Aperture: 4.5" Square Reflector	_	LC44
Trim Type: Square Die-Cast Overlap	-	SDO
Lumen Output (Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Downlight with 50° cut-off	-	DN
Distribution: Wide Flood	_	WFL
Reflector Color: Clear Diffuse	_	CD
Flange Finish: White Painted	_	WP



2 DAY: 200 pieces or less



Housing Ordering

Housing Ordering		
ID+ 4.5" x 4.5" Wall Wash	_	FLC44W
Trim Type: Square Overlap	_	so
Color Option: Standard White, 80 CRI	_	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	_	LD1
Housing Type: Thermally Protected	_	T
Factory Options		
Bar Hangers	ВН	Α
Trim & LED Module		
Aperture: 4.5" Square Reflector	_	LC44
Trim Type: Square Die-Cast Overlap	_	SDO
Lumen Output (Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
Color Temperature		
3000K, 80+ CRI	30K	\overline{A}
3500K, 80+ CRI	35K	
Optic: Wall Wash	- 4	ww
Reflector Color: Clear Diffuse	_	CD
Flange Finish: White Painted	_	WP





HOW TO USE THIS GUIDE

The product options included in this guide all qualify for **Quickship RED**. Simply complete a catalog number by selecting the options you require and clearly mark your order as **Quickship RED** for fast processing. For more information or an expanded list of options, please consult the individual product cut sheets at focalpointlights.com.

QUICKSHIP POLICIES

Quickship Red line items must be denoted as such to ship with the 2-day terms of the program whether an entire order is comprised of only Quickship Red items or it includes Quickship Red, Quickship, and standard line items.

Items with different lead times will ship separately unless the order is marked as "SHIP COMPLETE". In that case, the entire order will ship with the longest lead time.

Estimated ship dates (ESD) are determined per the following example: If a clean order is received by 11:00am CST on Monday for a Quickship Red, 2-day item, the ESD will be Wednesday. Orders received after 11am will receive an ESD based on the following business day.

ORDER CHECKLIST

- ▲ Complete and correct catalog numbers
- ▲ Quickship RED clearly denoted in subject line of email and on PO
- ▲ Complete PO with proper terms
- ▲ Run lengths when required
- ▲ EM/EC locations and voltage when required

REMINDERS

All ship dates are estimated. 2-, 5- and 10-day lead times do not include weekends or holidays.

Consult factory for options or quantities not shown in this guide. Large quantities may not qualify for Quickship or Quickship Red.

Partial shipments may be required based on current factory loads.

Change orders of any kind will affect lead time.







uickship RED

The fastest available made-to-order, architectural grade downlights on the market have arrived!



FOCAL POINT®

Bringing It All To Light®











