



Quickship Guide

5&10 DAY Configurations



FOCAL POINT®

Bringing It All To Light®



Quickship
RED

2DAY
Configurations

Quickship Policies

Quickship is a broad, made-to-order offering of architectural luminaires that support all main areas of a project. We leverage our vertical integration and on-site manufacturing capabilities to ship a wide variety of options in 2, 5 and 10 days. Unlike a stock program, Quickship gives you the ability to satisfy tight project schedules without sacrificing quality or selection.

HOW TO USE THIS GUIDE

The product options included in this guide all qualify for **Quickship** or **Quickship RED**. Simply complete a catalog number by selecting the options you require and clearly mark your order as **Quickship** or **Quickship RED** for fast processing. For more information or an expanded list of options, please consult the individual product cut sheets at focalpointlights.com.

QUICKSHIP POLICIES

Quickship line items must be denoted as such to ship with the 2-, 5- or 10-day terms of the program whether an entire order is comprised of only Quickship items or it includes both Quickship and standard line items.

Items with different lead times will ship separately unless the order is marked as "SHIP COMPLETE". In that case, the entire order will ship with the longest lead time.

Estimated ship dates (ESD) are determined per the following example: If a clean order is received by 11:00am CST on Monday for a Quickship Red, 2-day item, the ESD will be Wednesday. For a 5-day item, the ESD will be the following Monday. Orders received after 11am will receive an ESD based on the following business day.

ORDER CHECKLIST

- ✓ Complete and correct catalog numbers
- ✓ **Quickship** or **Quickship RED** clearly denoted in subject line of email and on PO
- ✓ Complete PO with proper terms
- ✓ Run lengths when required
- ✓ EM/EC locations and voltage when required

REMINDERS

All ship dates are estimated. 2-, 5- and 10-day lead times do not include weekends or holidays.

Consult factory for options or quantities not shown in this guide. Large quantities may not qualify for Quickship or Quickship Red.

Partial shipments may be required based on current factory loads.

Change orders of any kind will affect lead time.

CONTRACTOR SUPPORT

With our Quickship program and a host of resources found in the Contractor Zone of our website, we support quick-turn and design-build projects from specification to installation.

Learn more at focalpointlights.com/contractorzone




Quickship **RED**

Quickship and **Quickship RED** give you access to the products you need with the speed that you require. Made-to-order luminaires are available for shipment in 2, 5, or 10 days and, when the job calls for unique designs, our engineering team and US-based manufacturing facility are also here to support you with custom luminaires.


- Linear, perimeter and cove luminaires – individual units, runs, patterns
- ID+ 3.5" Adjustable downlights
- ID+ 3.5" and 4.5" Cylinders
- Architectural troffers



- ID+ 3.5" and 4.5" Downlights and Wall Washers
- Architectural troffers



Most popular options offered for the ID+ 3.5" and 4.5" Downlights and Wall Washers

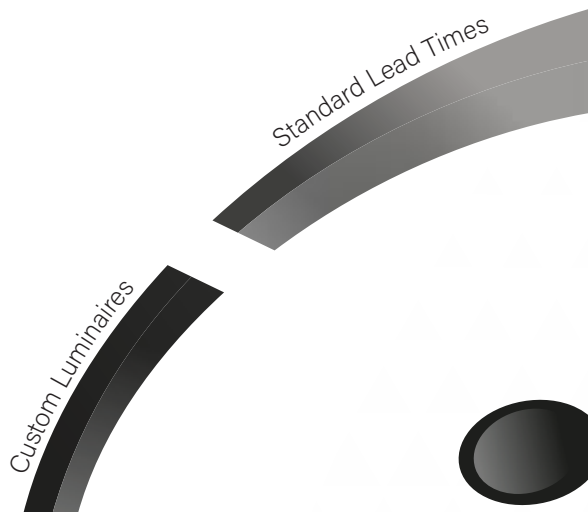

Learn more at focalpointlights.com/Quickship



Quickship Index



ID+ DOWNLIGHTS

ID+ 3.5" Downlight & Wall Wash	06
ID+ 3.5"x3.5" Downlight & Wall Wash.....	08
ID+ 4.5" Downlight & Wall Wash.....	10
ID+ 4.5"x4.5" Downlight & Wall Wash.....	12



ID+ DOWNLIGHTS & CYLINDERS

ID+ 3.5" & 3.5"x3.5" Adjustable.....	14
ID+ 3.5" Downlight & Wall Wash	16
ID+ 3.5" Trimless Downlight & Wall Wash.....	18
ID+ 3.5"x3.5" Downlight & Wall Wash.....	20
ID+ 3.5"x3.5" Trimless Downlight & Wall Wash.....	22
ID+ 4.5" Downlight & Wall Wash.....	24
ID+ 4.5" Trimless Downlight & Wall Wash.....	26
ID+ 4.5"x4.5" Downlight & Wall Wash.....	28
ID+ 4.5"x4.5" Trimless Downlight & Wall Wash.....	30
ID+ 3.5" Cylinders.....	32
ID+ 4.5" Cylinders.....	34



LINEAR

Seem® 1 Suspended / Direct/Indirect	36
Seem® 1 Recessed & Patterns.....	38
Seem® 2 Suspended / Wall Mount.....	40
Seem® 2 Suspended / Wall Mount Direct/Indirect.....	42
Seem® 2 Recessed & Patterns / Pop-Down.....	43-44
Seem® 4 Suspended / Pop-Down / Wall Mount.....	45-46
Seem® 4 Suspended / Wall Mount Direct/Indirect	47-48
Seem® 4 Recessed & Patterns / Pop-Down.....	49-50
Seem® 4-LP.....	52
Seem® 6 Recessed & Patterns	54
Avenue® 6 LED	56
Twelve LED	58



PERIMETER & COVE

Seem® 2 Perimeter	60
Seem® 4 Perimeter / Grazer	62
Covert Lite®.....	64
Focus Wall Wash.....	66



ARCHITECTURAL TROFFERS

Aerion®	68
Amica® 2	70
Amica® LED	72
Equation® 2.....	73-74
Luna® LED.....	76
Veer® LED	77-78

FEATURE KEY



Right Light



Wet Location



DLC® Listed



Energy Star



ID+ 3.5"

DOWNLIGHT & WALL WASH



*3.5" Downlights

ID+ 3.5" DOWNLIGHT & WALL WASH

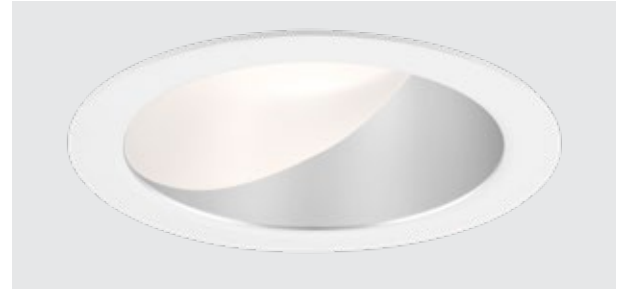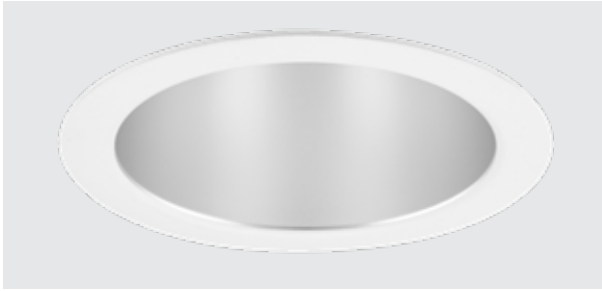

Housing Ordering

ID+ 3.5" Downlight	—	FLC3D
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 CRI	—	SW
Lumen Output		
1100 Lumen	1100L	
1500 Lumen	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	—	LD1
Housing		
Thermally Protected, Non-IC / Airtight	—	T
Factory Options		
Bar Hangers	BH	
Trim & LED Module		
Aperture: 3.5" Round Reflector	—	LC3
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 CRI	—	SW
Lumen Output		
(Trim & housing output must match)		
1100 Lumen	1100L	
1500 Lumen	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Tall Cone with 50° cut-off	—	DNT
Distribution: Wide Flood	—	WFL
Finish: Clear Diffuse	—	CD
Flange Finish: White Painted	—	WP

QS QUICKSHIP TERMS

2 DAY: 200 pieces or less

Housing Ordering

ID+ 3.5" Wall Wash	—	FLC3W
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 CRI	—	SW
Lumen Output		
1100 Lumen	1100L	
1500 Lumen	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	—	LD1
Housing Type		
Thermally Protected, Non-IC	—	T
Factory Options		
Bar Hangers	BH	
Trim & LED Module		
Aperture: 3.5" Round Reflector	—	LC3
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 CRI	—	SW
Lumen Output		
(Trim & housing output must match)		
1100 Lumen	1100L	
1500 Lumen	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Short Cone with 60° cut-off	—	WWS
Finish: Clear Diffuse	—	CD
Flange Finish: White Painted	—	WP

QS QUICKSHIP TERMS

2 DAY: 100 pieces or less

ID+ 3.5" X 3.5"

DOWNLIGHT & WALL WASH



*3.5"x3.5" Downlights

ID+ 3.5" x 3.5" DOWNLIGHT & WALL WASH

Q²
DAY
Configurations



Housing Ordering

ID+ 3.5"x3.5" Downlight	—	FLC33D
Trim Type: Square Die-Cast Overlap	—	SDO
Color Options: Standard White, 80 CRI	—	SW
Lumen Output		
1100 Lumen	1100L	
1500 Lumen	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	—	LD1
Housing Type		
Thermally Protected, Non-IC / Airtight	—	T
Factory Options		
Bar Hangers	BH	

Trim & LED Module

Aperture: 3.5" Square Reflector	—	LC33
Trim Type: Square Die-Cast Overlap	—	SDO
Color Options: Standard White, 80 CRI	—	SW
Lumen Output		
(Trim & housing output must match)		
1100 Lumen	1100L	
1500 Lumen	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Tall Cone with 50° cut-off	—	DNT
Distribution: Wide Flood	—	WFL
Finish: Clear Diffuse	—	CD
Flange Finish: White Painted	—	WP

QS QUICKSHIP TERMS

2 DAY: 200 pieces or less



Housing Ordering

ID+ 3.5"x3.5" Wall Wash	—	FLC33W
Trim Type: Square Die-Cast Overlap	—	SDO
Color Options: Standard White, 80 CRI	—	SW
Lumen Output		
1100 Lumen	1100L	
1500 Lumen	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	—	LD1
Housing Type		
Thermally Protected, Non-IC	—	T
Factory Options		
Bar Hangers	BH	

Trim & LED Module

Aperture: 3.5" Square Reflector	—	LC33
Trim Type: Square Die-Cast Overlap	—	SDO
Color Options: Standard White, 80 CRI	—	SW
Lumen Output		
(Trim & housing output must match)		
1100 Lumen	1100L	
1500 Lumen	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Short Cone with 60° cut-off	—	WWS
Finish: Clear Diffuse	—	CD
Flange Finish: White Painted	—	WP

QS QUICKSHIP TERMS

2 DAY: 100 pieces or less


ID+ 4.5"

DOWNLIGHT & WALL WASH



*4.5" Downlights

ID+ 4.5" DOWNLIGHT & WALL WASH

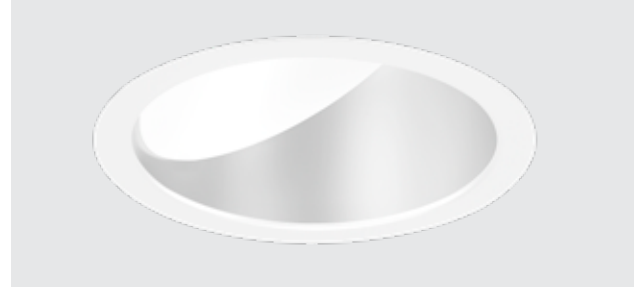

Housing Ordering

ID+ 4.5" Downlight	—	FLC4D
Trim Type: Round Overlap	—	RO
Color Option: Standard White, 80 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	—	LD1
Housing Type: Thermally Protected	—	T
Factory Options		
Bar Hangers	BH	

Trim & LED Module

Aperture: 4.5" Round Reflector	—	LC4
Trim Type: Round Overlap	—	RO
Lumen Output (Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Downlight with 50° cut-off	—	DN
Distribution: Wide Flood	—	WFL
Reflector Color: Clear Diffuse	—	CD
Flange Finish: White Painted	—	WP



QUICKSHIP TERMS

2 DAY: 200 pieces or less

Housing Ordering

ID+ 4.5" Downlight	—	FLC4W
Trim Type: Round Overlap	—	RO
Color Option: Standard White, 80 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	—	LD1
Housing Type: Thermally Protected	—	T
Factory Options		
Bar Hangers	BH	

Trim & LED Module

Aperture: 4.5" Round Reflector	—	LC4
Trim Type: Round Overlap	—	RO
Lumen Output (Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Wall Wash	—	WW
Reflector Color: Clear Diffuse	—	CD
Flange Finish: White Painted	—	WP



QUICKSHIP TERMS

2 DAY: 100 pieces or less

ID+ 4.5" X 4.5"

DOWNLIGHT & WALL WASH



*4.5" x 4.5" Downlights

ID+ 4.5" x 4.5" DOWNLIGHT & WALL WASH

Q2
DAY
Configurations



Housing Ordering

ID+ 4.5" x 4.5" Downlight	—	FLC44D
Trim Type: Square Overlap	—	SO
Color Option: Standard White, 80 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	—	LD1
Housing Type: Thermally Protected	—	T
Factory Options		
Bar Hangers	BH	

Trim & LED Module

Aperture: 4.5" Square Reflector	—	LC44
Trim Type: Square Die-Cast Overlap	—	SDO
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Downlight with 50° cut-off	—	DN
Distribution: Wide Flood	—	WFL
Reflector Color: Clear Diffuse	—	CD
Flange Finish: White Painted	—	WP



QUICKSHIP TERMS

2 DAY: 200 pieces or less



Housing Ordering

ID+ 4.5" x 4.5" Wall Wash	—	FLC44W
Trim Type: Square Overlap	—	SO
Color Option: Standard White, 80 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 10% Dimming	—	LD1
Housing Type: Thermally Protected	—	T
Factory Options		
Bar Hangers	BH	

Trim & LED Module

Aperture: 4.5" Square Reflector	—	LC44
Trim Type: Square Die-Cast Overlap	—	SDO
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic: Wall Wash	—	WW
Reflector Color: Clear Diffuse	—	CD
Flange Finish: White Painted	—	WP




QUICKSHIP TERMS

2 DAY: 100 pieces or less

ID + 3.5"

ADJUSTABLE

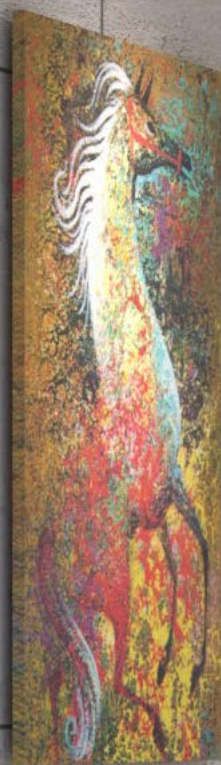

ID+ 3.5" ADJUSTABLE



ID+ 3.5" Adjustable	—	FLCS3
Trim Type: Round Overlap	—	RO
Lumen Output		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
Distribution		
15° Spot (AAS trim optic only)	SP	
18° Spot with Solite Lens	SPA	
25° Narrow Flood	NFL	
40° Flood	FL	
30° x 15° Linear Spread Lens	LS	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only. 700L & 1100L only.)	LFP	
Housing Type		
IC Rated / Airtight (Available options: 700L, 900L & 1100L)	IC	
Thermally Protected, Non-IC	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Aperture: 3.5" Round Aperture	—	LCS3
Trim Type: Round Overlap	—	RO
Optic		
Adjustable Accent (Solite lens standard, wet location.)	AA	
Adjustable Accent - 15° Spot (Open optic, no wet location. SP distribution only)	AAS	
Reflector Color		
Clear Diffuse	CD	
White	WH	
Flange Finish (Leave blank for Clear Diffuse finish)		
Black	BK	
White	WH	

ID+ 3.5"x3.5" Adjustable	—	FLCS33
Trim Type: Square Overlap	—	SO
Lumen Output		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
Distribution		
15° Spot (AAS trim optic only)	SP	
18° Spot with Solite Lens	SPA	
25° Narrow Flood	NFL	
40° Flood	FL	
30° x 15° Linear Spread Lens	LS	
Voltage		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only. 700L & 900L only.)	LFP	
Housing Type		
IC Rated / Airtight (Available options: 700L, 900L)	IC	
Thermally Protected, Non-IC	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Aperture: 3.5" Square Aperture	—	LCS33
Trim Type: Square Overlap	—	SO
Optic		
Adjustable Accent (Solite lens standard, wet location.)	AA	
Adjustable Accent - 15° Spot (Open optic, no wet location. SP distribution only)	AAS	
Reflector Color		
Clear Diffuse	CD	
White	WH	
Flange Finish (Leave blank for Clear Diffuse finish)		
Black	BK	
White	WH	



10 DAY: 100 pieces or less



10 DAY: 100 pieces or less



ID + 3.5"

DOWNLIGHT & WALL WASH



*3.5" Downlights

ID+ 3.5" DOWNLIGHT & WALL WASH



Housing Ordering

ID+ 3.5" Downlight	—	FLC3D
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Voltage		
120/270 Volt (IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC / Airtight	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	
Emergency Battery with Remote Test Switch (T-rated housing only. Above ceiling access required.)	EMR	

Trim & LED Module

Aperture: 3.5" Round Reflector	—	LC3
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output (Trim & housing output must match)		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	DNT	
Short Cone with 60° cut-off	DNS	
Distribution		
Narrow Flood	NFL	
Flood1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Finish		
Clear Diffuse	CD	
White	WH	
Optional Flange Finish (CD finish only. For matching finishes leave blank)		
White Painted	WP	

QS QUICKSHIP TERMS

5 DAY: 200 pieces or less



Housing Ordering

ID+ 3.5" Wall Wash	—	FLC3W
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Voltage		
120/270 Volt (IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	

Trim & LED Module

Aperture		
3.5" Round Reflector	LC3	
3.5" Round Airtight Reflector	LC3AT	
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output (Trim & housing output must match)		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	WWT	
Short Cone with 60° cut-off	WWS	
Finish		
Clear Diffuse	CD	
White	WH	
Optional Flange Finish (CD finish only. For matching finishes leave blank)		
White Painted	WP	

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less



ID+3.5" TRIMLESS DOWNLIGHT & WALL WASH



*3.5" Downlights

ID+ 3.5" TRIMLESS DOWNLIGHT & WALL WASH



Housing Ordering

ID+ 3.5" Downlight	—	FLC3D
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Voltage		
120/270 Volt (IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC / Airtight	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	

Trim & LED Module

Aperture: 3.5" Round Reflector	—	LC3
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output (Trim & housing output must match)		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	DNT	
Short Cone with 60° cut-off	DNS	
Distribution		
Narrow Flood	NFL	
Flood1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Finish		
Clear Diffuse	CD	
White	WH	

Housing Ordering

ID+ 3.5" Wall Wash	—	FLC3W
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Voltage		
120/270 Volt (IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	

Trim & LED Module

Aperture		
3.5" Round Reflector	LC3	
3.5" Round Airtight Reflector	LC3AT	
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output (Trim & housing output must match)		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	WWT	
Short Cone with 60° cut-off	WWS	
Finish		
Clear Diffuse	CD	
White	WH	



5 DAY: 200 pieces or less



5 DAY: 100 pieces or less

10 + 3.5" X 3.5"

DOWNLIGHT & WALL WASH



*3.5"x3.5" Downlights

ID+ 3.5" x 3.5" DOWNLIGHT & WALL WASH



Housing Ordering

ID+ 3.5"x3.5" Downlight	—	FLC33D
Trim Type: Square Die-Cast Overlap	—	SDO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Voltage		
120/270 Volt (IC-rated housing: SW - 1100lm max. T-rated housing: SW - 1100lm max.)	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC / Airtight	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	
Emergency Battery with Remote Test Switch (T-rated housing only. Above ceiling access required.)	EMR	
Trim & LED Module		
Aperture: 3.5" Square Reflector	—	LC33
Trim Type: Square Die-Cast Overlap	—	SDO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output (Trim & housing output must match)		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	DNT	
Short Cone with 60° cut-off	DNS	
Distribution		
Narrow Flood	NFL	
Flood1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Finish		
Clear Diffuse	CD	
White	WH	
Optional Flange Finish (CD finish only. For matching finishes leave blank)		
White Painted	WP	



Housing Ordering

ID+ 3.5"x3.5" Wall Wash	—	FLC33W
Trim Type: Square Die-Cast Overlap	—	SDO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
Voltage		
120/270 Volt (IC-rated housing: SW - 1100lm max. T-rated housing: SW - 700lm max.)	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	
Trim & LED Module		
Aperture		
3.5" Square Reflector	LC33	
3.5" Square Airtight Reflector	LC33AT	
Trim Type: Square Die-Cast Overlap	—	SDO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output (Trim & housing output must match)		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	WWT	
Short Cone with 60° cut-off	WWS	
Finish		
Clear Diffuse	CD	
White	WH	
Optional Flange Finish (CD finish only. For matching finishes leave blank)		
White Painted	WP	



5 DAY: 200 pieces or less

Select a specification for each option and combine to determine full catalog number.



5 DAY: 100 pieces or less



ID+ 3.5" X 3.5"

TRIMLESS DOWNLIGHT & WALL WASH



*3.5" x 3.5" Downlights

ID+ 3.5" x 3.5" TRIMLESS DOWNLIGHT & WALL WASH



Housing Ordering

ID+ 3.5"x3.5" Downlight	—	FLC33D
Trim Type: Square Die-Cast Trimless	—	SDT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Voltage		
120/270 Volt (IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC / Airtight	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	
Trim & LED Module		
Aperture: 3.5" Square Reflector	—	LC33
Trim Type: Square Die-Cast Trimless	—	SDT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output (Trim & housing output must match)		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	DNT	
Short Cone with 60° cut-off	DNS	
Distribution		
Narrow Flood	NFL	
Flood1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Finish		
Clear Diffuse	CD	
White	WH	



Housing Ordering

ID+ 3.5"x3.5" Wall Wash	—	FLC33W
Trim Type: Square Die-Cast Trimless	—	SDT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
Voltage		
120/270 Volt (IC-rated housing: SW - 1700lm max. T-rated housing: SW - 700lm max.)	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	
Trim & LED Module		
Aperture		
3.5" Square Reflector	LC33	
3.5" Square Airtight Reflector	LC33AT	
Trim Type: Square Die-Cast Trimless	—	SDT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output (Trim & housing output must match)		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	WWT	
Short Cone with 60° cut-off	WWS	
Finish		
Clear Diffuse	CD	
White	WH	



5 DAY: 200 pieces or less

Select a specification for each option and combine to determine full catalog number.



5 DAY: 100 pieces or less

ID + 4.5"

DOWNLIGHT & WALL WASH



*4.5" Downlights

ID+ 4.5" DOWNLIGHT & WALL WASH



ID+ 4.5" Downlight	—	FLC4D
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution or LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 2000L max. LZ1 & LFP 1500L max. LC4AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Emergency Battery	EM	
(Must order LC4EM trim. Not wet location or outdoor rated.)		
Aperture		
4.5" Round Reflector	LC4	
4.5" Round Reflector - Airtight	LC4AT	
(IC housing required for Airtight rating)		
4.5" Round Reflector - Emergency	LC4EM	
(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)		
Trim Type: Round	—	RO
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution.)		
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Optic: Downlight with 50° cut-off	—	DN
Distribution		
Spot	SP	
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Reflector Color		
Clear Diffuse	CD	
White (White Painted flange only)	WH	
Flange Finish		
Non-Painted (Clear Diffuse only)	NP	
White Painted	WP	



ID+ 4.5" Downlight	—	FLC4W
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 2000L max. LZ1 & LFP 1500L max. LC4AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Aperture		
4.5" Round Reflector	LC4	
4.5" Round Reflector - Airtight	LC4AT	
(IC housing required for Airtight rating)		
Trim Type: Round	—	RO
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Optic: Wall Wash	—	WW
Reflector Color		
Clear Diffuse	CD	
White (White Painted flange only)	WH	
Flange Finish		
Non-Painted (Clear Diffuse only)	NP	
White Painted	WP	

QS QUICKSHIP TERMS
5 DAY: 100 pieces or less

QS QUICKSHIP TERMS
5 DAY: 200 pieces or less


ID+ 4.5"

TRIMLESS DOWNLIGHT & WALL WASH



*4.5" Downlights

ID+ 4.5" TRIMLESS DOWNLIGHT & WALL WASH

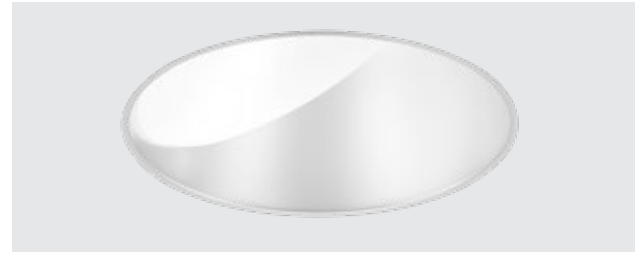

ID+ 4.5" Trimless Downlight	—	FLC4D
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution or LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 2000L max. LZ1 & LFP 1500L max. LC4AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Emergency Battery	EM	
(Must order LC4EM trim. Not wet location or outdoor rated.)		
Aperture		
4.5" Round Reflector	LC4	
4.5" Round Reflector - Airtight	LC4AT	
(IC housing required for Airtight rating)		
4.5" Round Reflector - Emergency	LC4EM	
(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)		
Trim Type: Round Trimless	—	RT
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution.)		
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Optic: Downlight with 50° cut-off	—	DN
Distribution		
Spot	SP	
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Reflector Color		
Clear Diffuse	CD	
White	WH	

ID+ 4.5" Trimless Wall Wash	—	FLC4W
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 2000L max. LZ1 & LFP 1500L max. LC4AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Aperture		
4.5" Round Reflector	LC4	
4.5" Round Reflector - Airtight	LC4AT	
(IC housing required for Airtight rating)		
Trim Type: Round Trimless	—	RT
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Optic: Wall Wash		WW
Reflector Color		
Clear Diffuse	CD	
White	WH	

QS QUICKSHIP TERMS
5 DAY: 100 pieces or less

QS QUICKSHIP TERMS
5 DAY: 200 pieces or less

ID+ 4.5" X 4.5"

DOWNLIGHT & WALL WASH



*4.5" x 4.5" Downlights

ID+ 4.5" x 4.5" DOWNLIGHT & WALL WASH



ID+ 4.5" x 4.5" Downlight	—	FLC44D
Trim Type: Square Overlap	—	SO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution or LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 2000L max. LZ1 & LFP 1500L max. LC44AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Emergency Battery	EM	
(Must order LC44EM trim. Not wet location or outdoor rated.)		
Aperture		
4.5" Square Reflector	LC44	
4.5" Square Reflector - Airtight	LC44AT	
(IC housing required for Airtight rating)		
4.5" Square Reflector - Emergency	LC4EM	
(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)		
Trim Type: Square Die-Cast Overlap	—	SDO
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution.)		
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
—		
Optic: Downlight with 50° cut-off		DN
Distribution		
Spot	SP	
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Reflector Color		
Clear Diffuse	CD	
White (White Painted flange only)	WH	
Flange Finish		
Non-Painted (Clear Diffuse only)	NP	
White Painted	WP	



ID+ 4.5" x 4.5" Wall Wash	—	FLC44W
Trim Type: Square Overlap	—	SO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
(Not available with LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 1500L max. LZ1 & LFP 1000L max. LC44AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Aperture		
4.5" Square Reflector	LC44	
4.5" Square Reflector - Airtight	LC44AT	
(IC housing required for Airtight rating)		
Trim Type: Square Die-Cast Overlap	—	SDO
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
—		
Optic: Wall Wash		WW
Reflector Color		
Clear Diffuse	CD	
White (White Painted flange only)	WH	
Flange Finish		
Non-Painted (Clear Diffuse only)	NP	
White Painted	WP	

QS QUICKSHIP TERMS

5 DAY: 200 pieces or less



QUICKSHIP TERMS

5 DAY: 100 pieces or less

10' x 4.5" x 4.5"

TRIMLESS DOWNLIGHT & WALL WASH



10' x 4.5" x 4.5" Downlights

ID+ 4.5" x 4.5" TRIMLESS DOWNLIGHT & WALL WASH



ID+ 4.5" x 4.5" Downlight	—	FLC44D
Trim Type: Square Trimless	—	ST
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution or LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 2000L max. LZ1 & LFP 1500L max. LC44AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Emergency Battery	EM	
(Must order LC44EM trim. Not wet location or outdoor rated.)		
Aperture		
4.5" Square Reflector	LC44	
4.5" Square Reflector - Airtight	LC44AT	
(IC housing required for Airtight rating)		
4.5" Square Reflector - Emergency	LC4EM	
(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)		
Trim Type: Square Die-Cast Trimless	—	SDT
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution.)		
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Optic: Downlight with 50° cut-off	—	DN
Distribution		
Spot	SP	
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Reflector Color		
Clear Diffuse	CD	
White	WH	



ID+ 4.5" x 4.5" Wall Wash	—	FLC44W
Trim Type: Square Trimless	—	ST
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
(Not available with LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 1500L max. LZ1 & LFP 1000L max. LC44AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Aperture		
4.5" Square Reflector	LC44	
4.5" Square Reflector - Airtight	LC44AT	
(IC housing required for Airtight rating)		
Trim Type: Square Die-Cast Trimless	—	SDT
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Optic: Wall Wash	—	WW
Reflector Color		
Clear Diffuse	CD	
White	WH	

QS QUICKSHIP TERMS
5 DAY: 100 pieces or less

QS QUICKSHIP TERMS
5 DAY: 200 pieces or less

ID + 3.5"

CYLINDERS



*Surface Mount Only

ID+ 3.5" CYLINDERS



ID+ 3.5" Round Cylinder Pendant	—	FLCY3
Trim Type: Round	—	RD
Decorative Reveal		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
Lumen Output		
700 Lumens	700L	
1000 Lumens	1000L	
1500 Lumens	1500L	
1700 Lumens	1700L	
2000 Lumens (Power Canopy only)	2000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
Voltage		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
Canopy Configuration		
Shallow Canopy, Integral Driver (LT1 & LFP only)	SC	
Power Canopy	PC	
Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming (Shallow Canopy, Integral Driver, 120V only)	LFP	
Mounting		
72" Cable, Straight Feed (Cut in field)	C72	
144" Cable, Straight Feed (Cut in field)	C144	
Optic		
50° Cut-off Cone (Not available with SWFL distribution)	DNT	
50° Cut-off Cone with Solite Lens (NFL distribution only)	DNTS	
80° Cut-off Cone (SWFL distribution only)	DSS	
Distribution		
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Super Wide Flood	SWFL	
Factory Options		
Emergency Battery (J-box cannot be recessed above the ceiling. Remote test switch.)	EMR	
Reflector Color: Clear Diffuse	—	CD
Luminaire Finish		
Black with Black cord	BK	
White with White cord	WH	

ID+ 3.5" Round Cylinder Surface Mount	—	FLCY3
Trim Type: Round	—	RD
Decorative Reveal		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
Lumen Output		
700 Lumens	700L	
1000 Lumens	1000L	
1500 Lumens	1500L	
1700 Lumens	1700L	
2000 Lumens (Power Canopy only)	2000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
Voltage		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
Canopy Configuration		
Shallow Canopy, Integral Driver (LT1 & LFP only)	SC	
Power Canopy	PC	
Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming (Shallow Canopy, Integral Driver, 120V only)	LFP	
Mounting: Surface Mount	—	SM
Optic		
50° Cut-off Cone (Not available with SWFL distribution)	DNT	
50° Cut-off Cone with Solite Lens (NFL distribution only)	DNTS	
80° Cut-off Cone (SWFL distribution only)	DSS	
Distribution		
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Super Wide Flood	SWFL	
Factory Options		
Emergency Battery (J-box cannot be recessed above the ceiling. Remote test switch.)	EMR	
Reflector Color: Clear Diffuse	—	CD
Luminaire Finish		
Black with Black cord	BK	
White with White cord	WH	

QS QUICKSHIP TERMS
10 DAY: 50 pieces or less

QS QUICKSHIP TERMS
10 DAY: 50 pieces or less



ID + 4.5"

CYLINDERS



*Surface Mount Only

ID+ 4.5" CYLINDERS



ID+ 4.5" Round Cylinder Pendant	—	FLCY4
Trim Type: Round	—	RD
Decorative Reveal		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens (Power Canopy only)	3000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
Voltage		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
Canopy Configuration		
Shallow Canopy, Integral Driver (LT1 & LFP only)	SC	
Power Canopy	PC	
Dimming Level		
0-10V - 0% Dimming	LZ1	
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming (Shallow Canopy, Integral Driver, 120V only)	LFP	
Mounting		
72" Cable, Straight Feed (Cut in field)	C72	
144" Cable, Straight Feed (Cut in field)	C144	
Optic		
50° Cut-off Cone (Not available with SWFL distribution)	DNT	
50° Cut-off Cone with Solite Lens (NFL distribution only)	DNTS	
80° Cut-off Cone (SWFL distribution only)	DSS	
Distribution		
Spot (1000L & 1500L only)	SP	
Narrow Flood	NFL	
Flood	FL	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Super Wide Flood	SWFL	
Factory Options		
Emergency Battery (J-box cannot be recessed above the ceiling. Remote test switch.)	EMR	
Reflector Color: Clear Diffuse	—	CD
Luminaire Finish		
Black with Black cord	BK	
White with White cord	WH	

ID+ 4.5" Round Cylinder Surface Mount	—	FLCY4
Trim Type: Round	—	RD
Decorative Reveal		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens (Power Canopy only)	3000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
Voltage		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
Shallow Canopy, Integral Driver	—	SC
Dimming Level		
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming (120V only)	LFP	
Mounting: Surface Mount	—	SM
Optic		
50° Cut-off Cone (Not available with SWFL distribution)	DNT	
50° Cut-off Cone with Solite Lens (NFL distribution only)	DNTS	
80° Cut-off Cone (SWFL distribution only)	DSS	
Distribution		
Spot (1000L & 1500L only)	SP	
Narrow Flood	NFL	
Flood	FL	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Super Wide Flood	SWFL	
Factory Options		
Emergency Battery (J-box cannot be recessed above the ceiling. Remote test switch.)	EMR	
Reflector Color: Clear Diffuse	—	CD
Luminaire Finish		
Black with Black cord	BK	
White with White cord	WH	

QS QUICKSHIP TERMS
10 DAY: 50 pieces or less

QS QUICKSHIP TERMS
10 DAY: 50 pieces or less

SEEM[®] 1

SUSPENDED & DIRECT/INDIRECT



SEEM 1 LED



Seem 1	—	FSM1S
Shielding		
Asymmetric Lens	AS	
Batwing Lens	BW	
Flush Lens	FL	
Lumen Output		
125 Lumens per foot (4' minimum length.)	125LF	
250 Lumens per foot (3' minimum length.)	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		
120/277 UNV Voltage	—	1C
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
24" Cable Suspension	C24_	
48" Cable Suspension	C48_	
96" Cable Suspension (Specify canopy color White (WH) or Black (BK). Example: C24WH.) (Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)	C96_	
Surface Mount	SM	
Factory Options		
Black Cord	BKCD	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1" increments (2' minimum length.)	_ft. _in.	ft. in.

Seem 1 Direct/Indirect	—	FSM1BS
Shielding		
Asymmetric optic top / Asymmetric lens bottom	ASAS	
Asymmetric optic top / Flush lens bottom	ASFL	
Batwing optic top / Asymmetric lens bottom	BWAS	
Batwing optic top / Flush lens bottom	BWFL	
Batwing optic top / Batwing lens bottom	BWBW	
Dust cover top / Asymmetric lens bottom	DCAS	
Dust cover top / Flush lens bottom	DCFL	
Dust cover top / Batwing lens bottom	DCBW	
Direct Distribution		
125 Lumens per foot	125DN	
250 Lumens per foot	250DN	
375 Lumens per foot	375DN	
500 Lumens per foot	500DN	
625 Lumens per foot	625DN	
Indirect Distribution		
125 Lumens per foot	125UP	
250 Lumens per foot	250UP	
375 Lumens per foot	375UP	
500 Lumens per foot	500UP	
625 Lumens per foot	625UP	
800 Lumens per foot	800UP	
1000 Lumens per foot	1000UP	
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		
Single Circuit	1C	
Dual Circuit	2C	
120/277 UNV Voltage		
—	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
24" Cable Suspension	C24_	
48" Cable Suspension	C48_	
96" Cable Suspension (Specify canopy color White (WH) or Black (BK). Example: C24WH.) (Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)	C96_	
Factory Options		
Black Cord	BKCD	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1" increments (4' minimum length.)	_ft. _in.	ft. in.

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 4' minimum length, maximum of 3 locations.
See [EM/EC Guide](#) for default locations and ordering details.


QS QUICKSHIP TERMS - 10 DAY: 1000' total length

SEEM[®] 1 RECESSED



SEEM 1 LED

Seem 1	—	FSM1
Shielding		
Asymmetric Lens	AS	_____
Batwing Lens	BW	_____
Flush Lens	FL	_____
Lumen Output		
125 Lumens per foot (4' minimum length.)	125LF	_____
250 Lumens per foot (3' minimum length.)	250LF	_____
375 Lumens per foot	375LF	_____
500 Lumens per foot	500LF	_____
625 Lumens per foot	625LF	_____
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
Standard 15/16" Lay-in	G1	_____
Standard 15/16" Tegular	T1	_____
Standard 9/16" Lay-in	G2	_____
Standard 9/16" Tegular	T2	_____
9/16" Slot-tee Tegular	G3	_____
Tall 15/16" Lay-in	G4	_____
Tall 15/16" Tegular	T4	_____
Tall 9/16" Lay-in	G5	_____
Tall 9/16" Tegular	T5	_____
Node 9/16" Tegular	T6	_____
Mud-in Trimless	XFF	_____
Non-Drywall Hard Surface	XFN	_____
Hard Surface, Wood	XFW	_____
Factory Options		
Chicago Plenum	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
Finish: Matte White Housing	—	WH
Length		ft. in.
Specify luminaire/row length in 1" increments (2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)	_ft. _in.	_____
Pattern (3' minimum length)		
'L' Pattern	A' x B'	_____
'U' Pattern	A' x B' x C'	_____
Rectangle Pattern	A' x B' R	_____

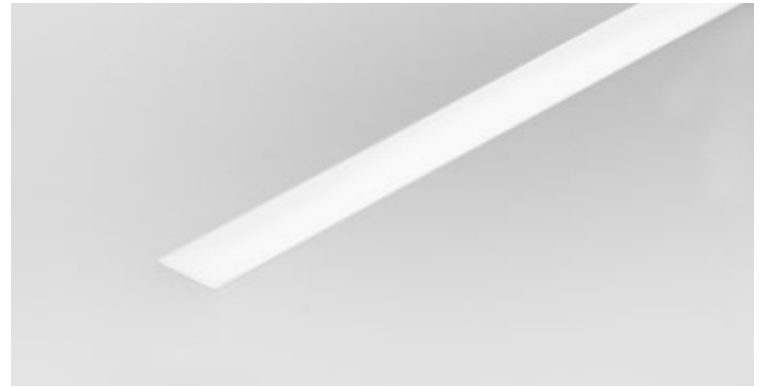

QS QUICKSHIP TERMS

10 DAY: 1000' total length. 48' maximum per pattern section.

***EC & EM:** 4' minimum length, maximum of 3 locations.

See [EM/EC Guide](#) for default locations and ordering details.

SEEM[®] 2

SUSPENDED & WALL MOUNT



SEEM 2 LED



Seem 2	—	FSM2LS
Shielding		
Asymmetric Lens	AS	
Batwing Lens	BW	
Flush Satin Lens	FL	
0.5" Pop-Down Lens	PD05	
Lumen Output		
125 Lumens per foot (4' minimum length.)	125LF	
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
750 Lumens per foot	750LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		
—	1C	
120/277 UNV Voltage		
—	UNV	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
24" Cable Suspension	C24__	
48" Cable Suspension	C48__	
96" Cable Suspension (Specify canopy color White (WH) or Black (BK). Example: C24WH.)	C96__	
(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)		
Surface Mount	SM	
Factory Options		
Black Cord	BKCD	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1' increments (2' minimum length.)	X'	

Seem 2 Wall Mount	—	FSM2LW
Shielding		
Asymmetric Lens	AS	
Flush Satin Lens	FL	
0.5" Pop-Down Lens	PD05	
Lumen Output		
125 Lumens per foot (4' minimum length.)	125LF	
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
750 Lumens per foot	750LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		
—	1C	
120/277 UNV Voltage		
—	UNV	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Wall Mount		
Factory Options		
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1' increments (2' minimum length.)	X'	



QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 3' minimum length, maximum of 3 locations.
See [EM/EC Guide](#) for default locations and ordering details.



QUICKSHIP TERMS

10 DAY: 1000' total length


***EC & EM:** 3' minimum length, maximum of 3 locations.
See [EM/EC Guide](#) for default locations and ordering details.

SEEM[®] 2

DIRECT/INDIRECT & WALL MOUNT



SEEM 2 LED

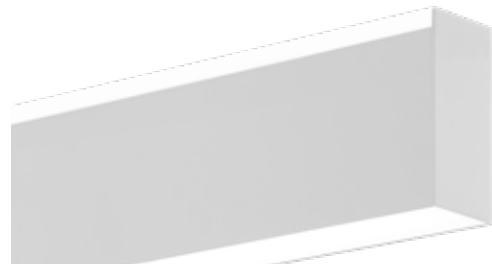

Seem 2 Direct/Indirect	—	FSM2BS
Shielding		
Asymmetric optic top / Asymmetric lens bottom	ASAS	
Asymmetric optic top / Flush lens bottom	ASFL	
Asymmetric optic top / 0.5" Pop-down lens bottom	ASPD05	
Batwing optic top / Asymmetric lens bottom	BWAS	
Batwing optic top / Batwing lens bottom	BWBW	
Batwing optic top / Flush lens bottom	BWFL	
Batwing optic top / 0.5" Pop-down lens bottom	BWPD05	
Dust cover top / Asymmetric lens bottom	DCAS	
Dust cover top / Batwing lens bottom	DCBW	
Dust cover top / Flush lens bottom	DCFL	
Dust cover top / 0.5" Pop-down lens bottom	DCPD05	
Direct Distribution		
125 Lumens per foot	125DN	
250 Lumens per foot	250DN	
375 Lumens per foot	375DN	
500 Lumens per foot	500DN	
625 Lumens per foot	625DN	
750 Lumens per foot	750DN	
875 Lumens per foot	875DN	
1000 Lumens per foot	1000DN	
Indirect Distribution		
250 Lumens per foot	250UP	
375 Lumens per foot	375UP	
500 Lumens per foot	500UP	
625 Lumens per foot	625UP	
750 Lumens per foot	750UP	
875 Lumens per foot	875UP	
1000 Lumens per foot	1000UP	
1250 Lumens per foot	1250UP	
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		
Single Circuit	1C	
Dual Circuit	2C	
120/277 UNV Voltage		
	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
24" Cable Suspension	C24	
48" Cable Suspension	C48	
96" Cable Suspension	C96	
(Specify canopy color White (WH) or Black (BK). Example: C24WH.)		
(Specify one of the following in place of "C"		
J - for 2" canopies at non-feed locations.		
CS - for sloped ceiling applications.)		
Factory Options		
Black Cord	BKCD	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1' increments	X'	
(4' minimum length.)		

Seem 2 Direct/Indirect Wall Mount	—	FSM2BW
Shielding		
Asymmetric optic top / Asymmetric lens bottom	ASAS	
Asymmetric optic top / Flush lens bottom	ASFL	
Asymmetric optic top / 0.5" Pop-down lens bottom	ASPD05	
Dust cover top / Asymmetric lens bottom	DCAS	
Dust cover top / Flush lens bottom	DCFL	
Dust cover top / 0.5" Pop-down lens bottom	DCPD05	
Direct Distribution		
125 Lumens per foot	125DN	
250 Lumens per foot	250DN	
375 Lumens per foot	375DN	
500 Lumens per foot	500DN	
625 Lumens per foot	625DN	
750 Lumens per foot	750DN	
875 Lumens per foot	875DN	
1000 Lumens per foot	1000DN	
Indirect Distribution		
250 Lumens per foot	250UP	
375 Lumens per foot	375UP	
500 Lumens per foot	500UP	
625 Lumens per foot	625UP	
750 Lumens per foot	750UP	
875 Lumens per foot	875UP	
1000 Lumens per foot	1000UP	
1250 Lumens per foot	1250UP	
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		
Single Circuit	1C	
Dual Circuit	2C	
120/277 UNV Voltage		
	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Wall Mount		
	—	WM
Factory Options		
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1' increments	X'	
(4' minimum length.)		

QS QUICKSHIP TERMS

10 DAY: 1000' total length


***EC & EM:** Maximum of 3 locations. See [EM/EC Guide](#) for default locations and ordering details.

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** Maximum of 3 locations. See [EM/EC Guide](#) for default locations and ordering details.

SEEM[®] 2 RECESSED

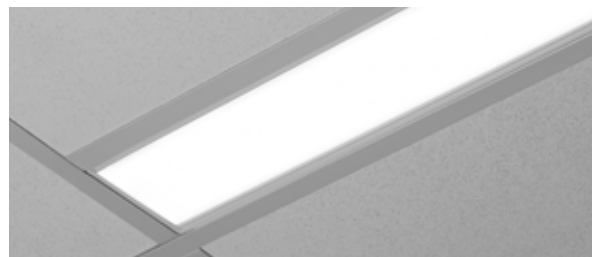


Seem 2 LED	—	FSM2L
Shielding		
Asymmetric Lens	AS	
Batwing Lens	BW	
Flush Satin Lens	FL	
0.5" Pop-Down Lens	PD05	
Regress Lens	SR	
(Housing height 5.5". Ceiling applications only)		
Regress High Performance Lens	SRXP	
(Housing height 5.5". Ceiling applications only)		
Lumen Output		
125 Lumens per foot	125LF	
(LD1 & L11 only, 4' minimum.)		
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
750 Lumens per foot*	750LF	
875 Lumens per foot*	875LF	
1000 Lumens per foot*	1000LF	
(*Not available with SR & SRXP)		
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		
120/277 UNV Voltage	—	1C
Control System & Dimming Level	—	UNV
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
Standard 15/16" Lay-in	G1	
Standard 15/16" Tegular	T1	
Standard 9/16" Lay-in	G2	
Standard 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in	G4	
Tall 15/16" Tegular	T4	
Tall 9/16" Lay-in	G5	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
Factory Options		
Chicago Plenum	CP	
(Not available with Flex Whip)		
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
Finish: Matte White Housing	—	WH
Length		
Specify luminaire/row length in ¹ / ₄ " increments	_ft. _in.	ft. in.
(2' minimum length, lengths are nominal, ¹ / ₄ " increments based on T-centers. Housing length is ¹ / ₄ " shorter than specified.)		
Pattern		
(3' minimum length)		
'L' Pattern	A' x B'	
'U' Pattern	A' x B' x C'	
Rectangle Pattern	A' x B' R	

QS QUICKSHIP TERMS

10 DAY: 1000' total length. 48' maximum per pattern section.

***EC & EM:** 4' minimum length, maximum of 3 locations.
See [EM/EC Guide](#) for default locations and ordering details.

SEEM 2 LED

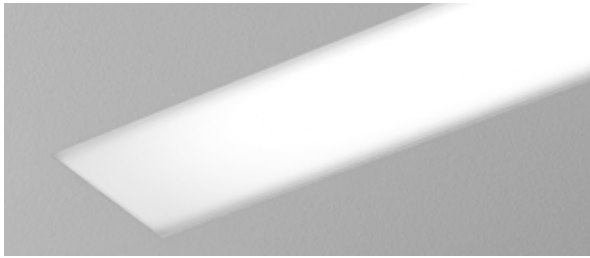

Seem 2 LED	—	FSM2L
Shielding		
Flush Satin Lens	FL	
Regress Lens (Housing height 5.5' Ceiling applications only)	SR	
Regress High Performance Lens (Housing height 5.5' Ceiling applications only)	SRXP	
Lumen Output		
125 Lumens per foot (LD1 & L11 only, 4' minimum.)	125LF	
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
Trim Flange Drywall	TF	
Trim Flange Wood	TFW	
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	
Mud-in Trimless, set thickness in field (Mounting equipment assembled in field)	XFF	
Non-Drywall Hard Surface	XFN	
Hard Surface, Wood	XFW	
Factory Options		
Chicago Plenum (Not available with Flex Whip)	CP	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FN1	
6' New York City Flex Whip (277V)	FN2	
6' Flex Whip	FW	
Finish: Matte White Housing	—	WH
Length		
Specify luminaire/row length in 1" increments (2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)	_ft. _in.	ft. in.
Pattern		
(3' minimum length)		
'L' Pattern	A' x B'	
'U' Pattern	A' x B' x C'	
Rectangle Pattern	A' x B' R	



Seem 2 LED	—	FSM2L
Shielding - 0.5" Pop-down Lens	—	PD05
Lumen Output		
125 Lumens per foot (LD1 & L11 only, 4' minimum.)	125LF	
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
Trim Flange Drywall	TF	
Trim Flange Wood	TFW	
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	
Mud-in Trimless, set thickness in field (Mounting equipment assembled in field)	XFF	
Non-Drywall Hard Surface	XFN	
Hard Surface, Wood	XFW	
Factory Options		
Chicago Plenum (Not available with Flex Whip)	CP	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FN1	
6' New York City Flex Whip (277V)	FN2	
6' Flex Whip	FW	
Finish: Matte White Housing	—	WH
Length		
Specify luminaire/row length in 1" increments (2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)	X'	

QS QUICKSHIP TERMS

10 DAY: 1000' total length. 48' maximum per pattern section.
***EC & EM:** 4' minimum length, maximum of 3 locations.
 See [EM/EC Guide](#) for default locations and ordering details.

QS QUICKSHIP TERMS

10 DAY: 1000' total length
***EM:** 4' minimum length, maximum of 3 locations.
 See [EM/EC Guide](#) for default locations and ordering details.

SEEM[®] 4

SUSPENDED & WALL MOUNT



Seem 4 LED	—	FSM4LS
Shielding		
Batwing Lens	BW	_____
Flush Satin Lens	FL	_____
Lumen Output		
275 Lumens per foot	275LF	_____
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
875 Lumens per foot	875LF	_____
1000 Lumens per foot	1000LF	_____
1125 Lumens per foot	1125LF	_____
1250 Lumens per foot	1250LF	_____
Color Temperature		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
120/277 UNV Voltage	—	1C
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
24" Cable Suspension	C24_	_____
48" Cable Suspension	C48_	_____
96" Cable Suspension (Specify canopy color White (WH) or Black (BK). Example: C24WH.)	C96_	_____
(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)		
Surface Mount	SM	_____
Factory Options		
Black Cord	BKCD	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
Finish		
Black	BK	_____
White	WH	_____
Length		
Specify luminaire/row length in 1' increments	X'	_____

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 4' minimum length, maximum of 3 locations.

See [EM/EC Guide](#) for default locations and ordering details.

SEEM 4 LED



Seem 4 LED Pop-Down	—	FSM4LS
Shielding: 0.5" Pop-Down Lens	—	PD05
Lumen Output		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
24" Cable Suspension	C24__	
48" Cable Suspension	C48__	
96" Cable Suspension (Specify canopy color White (WH) or Black (BK). Example: C24WH.) (Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)	C96__	
Surface Mount	SM	
Factory Options		
Black Cord	BKCD	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1' increments	X'	

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 4' minimum length, maximum of 3 locations.
See [EM/EC Guide](#) for default locations and ordering details.



Seem 4 LED Wall Mount	—	FSM4LW
Shielding: Flush Satin Lens	—	FL
Lumen Output		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Wall Mount	—	WM
Factory Options		
Emergency Circuit*	EC	
Emergency Battery Pack*	EM	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1' increments (2' minimum length.)	X'	

QS QUICKSHIP TERMS

10 DAY: 1000' total length


***EC & EM:** 4' minimum length, maximum of 3 locations.
See [EM/EC Guide](#) for default locations and ordering details.

SEEM[®] 4

DIRECT/INDIRECT & WALL MOUNT



SEEM 4 LED

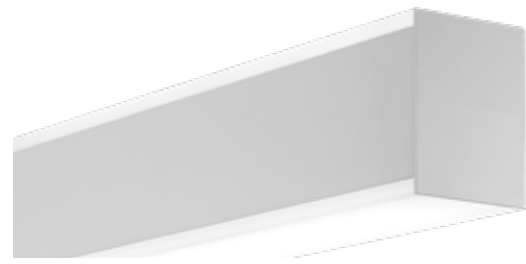

Seem 4 Direct/Indirect	—	FSM4BS
Shielding		
Batwing optic top / Batwing lens bottom	BWBW	
Batwing optic top / Flush lens bottom	BWFL	
Batwing optic top / 0.5" Pop-down bottom	BWPD05	
Flush lens top / Batwing lens bottom	FLBW	
Flush lens top / Flush lens bottom	FLFL	
0.5" Pop-up top / Batwing lens bottom	PUBW	
0.5" Pop-up top / Flush lens bottom	PUFL	
0.5" Pop-up top / 0.5" Pop-down bottom	PUPD05	
Direct Distribution		
(875 Lumens per foot maximum for xxPD05.)		
275 Lumens per foot	275DN	
375 Lumens per foot	375DN	
625 Lumens per foot	625DN	
875 Lumens per foot	875DN	
1000 Lumens per foot	1000DN	
1125 Lumens per foot	1125DN	
1250 Lumens per foot	1250DN	
Indirect Distribution		
(1000 Lumens per foot maximum for xxPD05.)		
275 Lumens per foot	275UP	
375 Lumens per foot	375UP	
625 Lumens per foot	625UP	
875 Lumens per foot	875UP	
1000 Lumens per foot	1000UP	
1125 Lumens per foot	1125UP	
1250 Lumens per foot	1250UP	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		
Single Circuit	1C	
Dual Circuit	2C	
(Multiple feeds required for 0-10V drivers)		
120/277 UNV Voltage		
—		UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
24" Cable Suspension	C24__	
48" Cable Suspension	C48__	
96" Cable Suspension	C96__	
(Specify canopy color White (WH) or Black (BK). Example: C24WH.)		
(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)		
Factory Options		
Black Cord	BKCD	
Emergency Circuit*	EC	
Emergency Battery Pack*	EM	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1' increments	X'	

Seem 4 Direct/Indirect Wall Mount	—	FSM4BW
Shielding		
Flush lens top / Flush lens bottom	FLFL	
0.5" Pop-up top / Flush lens bottom	PUFL	
0.5" Pop-up top / 0.5" Pop-down bottom	PUPD05	
Direct Distribution		
275 Lumens per foot	275DN	
375 Lumens per foot	375DN	
625 Lumens per foot	625DN	
875 Lumens per foot	875DN	
1000 Lumens per foot	1000DN	
(FLFL & PUFL only.)		
1250 Lumens per foot	1250DN	
(FLFL only.)		
Indirect Distribution		
275 Lumens per foot	275UP	
375 Lumens per foot	375UP	
625 Lumens per foot	625UP	
875 Lumens per foot	875UP	
1000 Lumens per foot	1000UP	
(FLFL & PUFL only.)		
1250 Lumens per foot	1250UP	
(FLFL only.)		
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		
Single Circuit	1C	
Dual Circuit	2C	
(Multiple feeds required for 0-10V drivers)		
120/277 UNV Voltage		
—		UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Wall Mount		
—		WM
Factory Options		
Emergency Circuit*	EC	
Emergency Battery Pack*	EM	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1' increments	X'	

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 8' lengths or longer. 4' illuminated area.
See [EM/EC Guide](#) for default locations and ordering details.

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 8' lengths or longer. 4' illuminated area.
See [EM/EC Guide](#) for default locations and ordering details.

SEEM[®] 4 RECESSED



Seem 4 LED	—	FSM4L
Shielding		
Batwing Lens	BW	
Flush Satin Lens	FL	
Regress Lens	SR	
Regress High Performance Lens	SRXP	
Lumen Output		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
1125 Lumens per foot	1125LF	
1250 Lumens per foot	1250LF	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		1C
120/277 UNV Voltage		UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
Standard 15/16" Lay-in	G1	
Standard 15/16" Tegular	T1	
Standard 9/16" Lay-in	G2	
Standard 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in	G4	
Tall 15/16" Tegular	T4	
Tall 9/16" Lay-in	G5	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
Factory Options		
Chicago Plenum	CP	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FN1Y	
6' New York City Flex Whip (277V)	FN2Y	
6' Flex Whip	FW	
Finish: Matte White Housing	—	WH
Length		
Specify luminaire/row length in 1" increments (2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)	_ft. _in.	ft. in.
Pattern (3' minimum length)		
'L' Pattern	A' x B'	
'U' Pattern	A' x B' x C'	
Rectangle Pattern	A' x B' R	

QS QUICKSHIP TERMS

10 DAY: 1000' total length. 48' maximum per pattern section.

***EC & EM:** 4' minimum length, maximum of 3 locations.


See [EM/EC Guide](#) for default locations and ordering details.



SEEM 4 LED



Seem 4 LED	—	FSM4L
Shielding		
Batwing Lens	BW	
Flush Satin Lens	FL	
Regress Lens	SR	
(Ceiling applications only)		
Regress High Performance Lens	SRXP	
(Ceiling applications only)		
Lumen Output		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
1125 Lumens per foot	1125LF	
1250 Lumens per foot	1250LF	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		
120/277 UNV Voltage	—	1C
Control System & Dimming Level		
0-10V - 1% Dimming	L11	UNV
0-10V - 10% Dimming	LD1	
Mounting		
Trim Flange Drywall	TF	
Trim Flange Wood	TFW	
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	
Mud-in Trimless, set thickness in field (Mounting equipment assembled in field)	XFF	
Non-Drywall Hard Surface	XFN	
Hard Surface, Wood	XFW	
Factory Options		
Chicago Plenum	CP	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
Finish: Matte White Housing		
—	—	WH
Length		
Specify luminaire/row length in 1" increments (2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)	_ft. _in.	ft. in.
Pattern (3' minimum length)		
'L' Pattern	A' x B'	
'U' Pattern	A' x B' x C'	
Rectangle Pattern	A' x B' R	

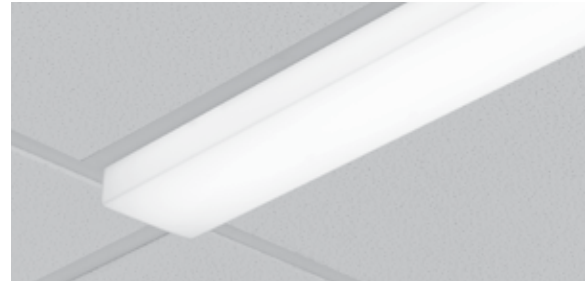

Seem 4 LED Pop-down Lens	—	FSM4L
Shielding: 0.5" Pop-down Lens	—	PD05
Lumen Output		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
750 Lumens per foot	750LF	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		
120/277 UNV Voltage	—	1C
Control System & Dimming Level		
0-10V - 1% Dimming	L11	UNV
0-10V - 10% Dimming	LD1	
Mounting		
Standard 15/16" Lay-in	G1	
Standard 15/16" Tegular	T1	
Standard 9/16" Lay-in	G2	
Standard 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in	G4	
Tall 15/16" Tegular	T4	
Tall 9/16" Lay-in	G5	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
Trim Flange Drywall	TF	
Trim Flange Wood	TFW	
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	
Mud-in Trimless, set thickness in field (Mounting equipment assembled in field)	XFF	
Non-Drywall Hard Surface	XFN	
Hard Surface, Wood	XFW	
Factory Options		
Chicago Plenum	CP	
Emergency Circuit*	EC	
Emergency Battery Pack*	EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
Finish: Matte White Housing		
—	—	WH
Length		
Specify luminaire/row length in 1" increments (2' minimum length.)	X'	

QS QUICKSHIP TERMS

10 DAY: 1000' total length. 48' maximum per pattern section.

***EC & EM:** 4' minimum length, maximum of 3 locations.
See [EM/EC Guide](#) for default locations and ordering details.

QS QUICKSHIP TERMS

10 DAY: 1000' total length. 48' maximum per pattern section.

***EC & EM:** 4' minimum length, maximum of 3 locations.
See [EM/EC Guide](#) for default locations and ordering details.

SEEM[®] 4-LP



SEEM 4-LP LED

Seem 4-LP LED	—	FSM4LP
Shielding: Flush Lens	—	FL
Lumen Output		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
Standard 15/16" Lay-in	G1	
Standard 15/16" Tegular	T1	
Standard 9/16" Lay-in	G2	
Standard 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in	G4	
Tall 15/16" Tegular	T4	
Tall 9/16" Lay-in	G5	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
Factory Options		
Chicago Plenum	CP	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
Finish: Matte White Housing	—	WH
Length		ft. in.
2'		
2' 6"		
3'		
4'		
5'		
6'		
7'		
7' 6"		
8'		

Specify luminaire/row length in 6" increments (8' minimum length) _ft. _in.

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 4' minimum length, maximum of 3 locations.
See [EM/EC Guide](#) for default locations and ordering details.




SEEM[®] 6 RECESSED



SEEM 6 LED

Seem 6 LED	—	FSM6L
Shielding		
Batwing Lens	BW	_____
Flush Satin Lens	FL	_____
Regressed Lens (Ceiling applications only)	SR	_____
Regressed High Performance Lens (Ceiling applications only)	SRXP	_____
Lumen Output		
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
875 Lumens per foot	875LF	_____
1000 Lumens per foot	1000LF	_____
1125 Lumens per foot	1125LF	_____
1250 Lumens per foot	1250LF	_____
Color Temperature		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
120/277 UNV Voltage	—	1C
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
Standard 15/16" Lay-in	G1	_____
Standard 15/16" Tegular	T1	_____
Standard 9/16" Lay-in	G2	_____
Standard 9/16" Tegular	T2	_____
9/16" Slot-tee Tegular	G3	_____
Tall 15/16" Lay-in	G4	_____
Tall 15/16" Tegular	T4	_____
Tall 9/16" Lay-in	G5	_____
Tall 9/16" Tegular	T5	_____
Node 9/16" Tegular	T6	_____
Trim Flange Drywall	TF	_____
Trim Flange Wood	TFW	_____
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	_____
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	_____
Mud-in Trimless, set thickness in field (Mounting equipment assembled in field)	XFF	_____
Non-Drywall Hard Surface	XFN	_____
Hard Surface, Wood	XFW	_____
Factory Options		
Chicago Plenum	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
Finish: Matte White Housing		
Length		
Specify luminaire/row length in 1" increments (2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)	_ft. _in.	_____
Pattern (3' minimum length)		
'L' Pattern	A' x B'	_____
'U' Pattern	A' x B' x C'	_____
Rectangle Pattern	A' x B' R	_____

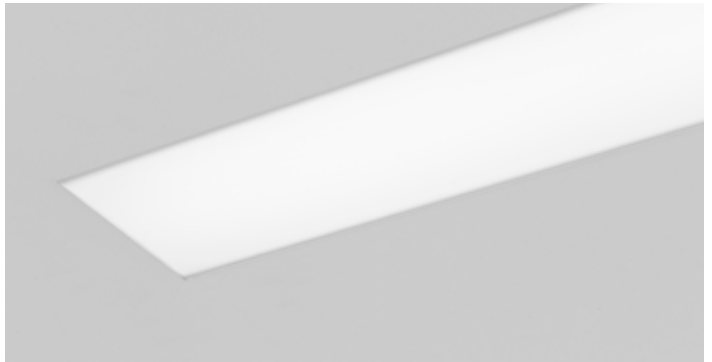

QS QUICKSHIP TERMS


10 DAY: 1000' total length. 48' maximum per pattern section.
***EC & EM:** 4' minimum length, maximum of 3 locations.
 See [EM/EC Guide](#) for default locations and ordering details.

AVENUE® 6 LED



AVENUE 6 LED

Avenue 6 LED	—	FAV6L
Shielding		
Corrugated Regressed Trim Frosted Lens	CR	
Solid Regressed Trim Frosted Lens	SR	
Flush Frosted Lens	FL	
Lumen Output		
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
4000K, 80+ CRI	40K	
Single Circuit		
—	—	1C
120/277 UNV Voltage		
—	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
Drywall Flange	F	
Standard 15/16" Lay-in	G1	
Standard 15/16" Tegular	T1	
Standard 9/16" Lay-in	G2	
Standard 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in	G4	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in	G4	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
Factory Options		
Chicago Plenum	CP	
Emergency Battery Pack with Integral Test Switch	EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
Finish: Matte White Housing		
—	—	WH
Length: 4' Nominal Housing		
—	—	4

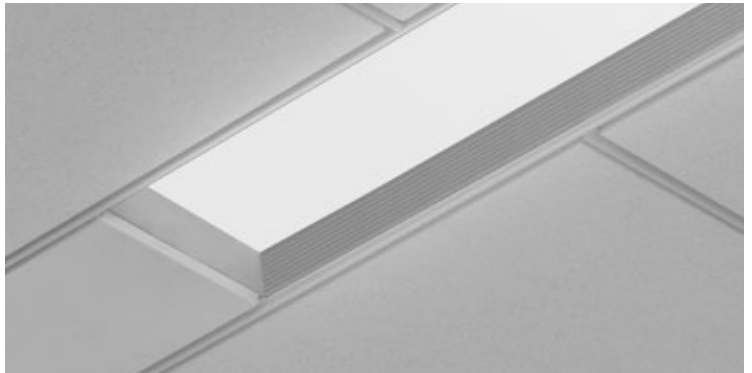

QS QUICKSHIP TERMS
10 DAY: 100 pieces or less



TWELVE LED

Twelve LED	—	FTWLS
Shielding		
Acrylic Diffuser	AC	
MicroGlow Prismatic Lens	MG	
Lumen Output		
750 Lumens per foot	750LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
1125 Lumens per foot	1125LF	
1250 Lumens per foot	1250LF	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
12" Cable Suspension	J12	
24" Cable Suspension	J24	
48" Cable Suspension	J48	
96" Cable Suspension	J96	
Factory Options		
Dust Cover	DST	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
Finish		
Titanium Silver	TS	
Matte White Housing	WH	
Length		
4'	4'	
8'	8'	
12' (8'+4')	12'	
16' (8'+8')	16'	
20' (8'+4'+8')	20'	
24' (8'+8'+8')	24'	

(Longer run lengths available in 4' increments.)



QS QUICKSHIP TERMS

10 DAY: 400' total length

***EC & EM:** Maximum of 3 locations. See cut sheet, page 4 for default locations and ordering details.

SEEM[®] 2

PERIMETER



SEEM 2 LED PERIMETER

Seem 2 LED Perimeter	—	FSM2PR
Housing Type		
Adjustable Lit Housing (Allows for +/- 3" adjustment to overall run length. 3' minimum luminaire length.)	ALH	_____
Fixed Housing	FXH	_____
Shielding		
Flush Lens (Not available with Unlit Sliding Sleeves - SSB)	FL0	_____
2.5" Regress	FL2	_____
4.0" Regress	FL4	_____
Lumen Output		
125 Lumens per foot (LD1 & L11 only, 4' minimum.)	125LF	_____
250 Lumens per foot	250LF	_____
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
Color Temperature		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Circuit - Single Circuit	—	1C
Voltage - 120/277 UNV Volt	—	UNV
Control System & Dimming Level		
0-10V - 10% Dimming	LD1	_____
0-10V - 1% Dimming	L11	_____
Mounting		
Lay-in Grid	G	_____
Flush (FL0)	Slot Tee / Tegular	ST
	Trim Flange Drywall	TF
	Mud-in Trimless Drywall	XFF
Regressed (FL2 & FL4)	Grid	G
	Trimless Drywall	XF
Factory Options		
Chicago Plenum (Not available with Flex Whip)	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
Fixed Housing with Unlit Sliding Sleeves (Set of two unlit 12" sleeves. Fixed housing in straight runs only. FL2 & FL4 only, 3' minimum luminaire length.)	SSB	_____
Finish - Matte White Housing	—	WH
Luminaire Length		
Specify luminaire/row length in 1" increments (2' minimum length)	_ft _in	ft in



QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 4' minimum length, not available at corners, maximum of 3 locations. See [EM/EC Guide](#) for default locations and ordering details.

SEEM[®] 4

PERIMETER

You More.


CNA

We can show you more.



SEEM 4 LED PERIMETER

Seem 4 LED Perimeter	—	FSM4PR
Housing Type		
Adjustable Lit Housing (Allows for +/- 3" adjustment to overall run length. 3' minimum luminaire length.)	ALH	_____
Fixed Housing	FXH	_____
Shielding		
Flush Lens (Not available with Unlit Sliding Sleeves - SSB)	FL0	_____
2.5" Regress	FL2	_____
4.0" Regress	FL4	_____
Flush Grazer (Not available with Unlit Sliding Sleeves - SSB)	GR0	_____
2.5" Regress Grazer	GR2	_____
4.0" Regress Grazer	GR4	_____
Lumen Output		
275 Lumens per foot	275LF	_____
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
875 Lumens per foot	875LF	_____
1000 Lumens per foot	1000LF	_____
Color Temperature		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Circuit - Single Circuit	—	1C
Voltage - 120/277 UNV Volt	—	UNV
Control System & Dimming Level		
0-10V - 10% Dimming	LD1	_____
0-10V - 1% Dimming	L11	_____
Mounting		
Lay-in Grid	G	_____
Flush Slot Tee / Tegalur	ST	_____
(FL0 & GR0) Trim Flange Drywall	TF	_____
Mud-in Trimless Drywall	XFF	_____
Regressed Grid	G	_____
(FL2, FL4, GR2 & GR4) Trimless Drywall	XF	_____
Factory Options		
Chicago Plenum	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
Fixed Housing with Unlit Sliding Sleeves (Set of two unlit 12" sleeves. Fixed housing in straight runs only. FL2 & FL4 only. 3' minimum luminaire length.)	SSB	_____
Finish - Matte White Housing	—	WH
Luminaire Length		
Specify luminaire/row length in 1" increments (2' minimum length)	_ft _in	ft in

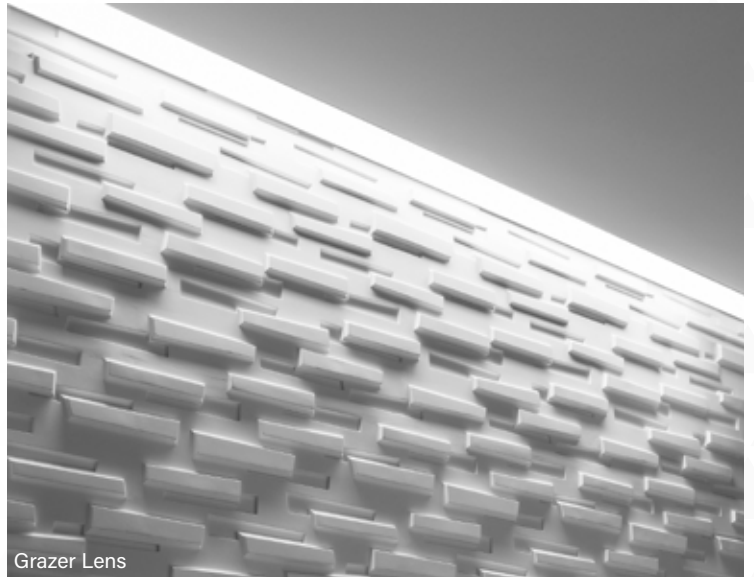

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 4' minimum length, not available at corners, maximum of 3 locations. See [EM/EC Guide](#) for default locations and ordering details.

COVERT LITE®



COVERT LITE



Covert Lite	—	FCOLT
Profile: Horizontal Fixed	—	HF
Lumen Output		
500 Lumen	500L	
750 Lumen	750L	
1000 Lumen	1000L	
1200 Lumens	1200L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting: Cove	—	CV
Factory Options		
Emergency Circuit	_EC	
(See EC Guide for default locations and ordering details.)		
Finish: No Finish	—	NF
Length		
Specify luminaire/row length in 1' increments	X'	
(2' minimum length. Each feed location increases overall luminaire length by 1')		



QS QUICKSHIP TERMS

10 DAY: 400' total length



FOCUS

WALL WASH

FOCUS WALL WASH

Focus Wall Wash	—	FWSL
Shielding: Frosted Lens	—	FL
Lumen Output		
250 Lumens per foot	250LF	
450 Lumens per foot	450LF	
650 Lumens per foot	650LF	
800 Lumens per foot	800LF	
950 Lumens per foot	950LF	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting: Universal	—	U
Factory Options		
Air Return	AR	
Chicago Plenum	CP	
Flanged Ends	FL	
Finish: Matte White Housing	—	WH
Length		ft. in.
Specify luminaire/row length in 1" increments_ft. _in.		
(2' minimum length. Each feed location increases overall luminaire length by 1')		




QS QUICKSHIP TERMS

10 DAY: 400' total length

AERION[®] LED



*not all features are available for Quickship

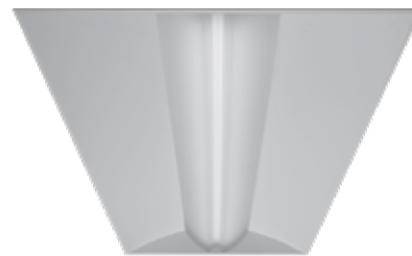

Aerion LED		FARL
Nominal Size: 2' x 2'		22
Shielding: Acrylic Diffuser		AC
Lumen Output		
Standard	2000 Lumens	2000L
	2500 Lumens	2500L
	3000 Lumens	3000L
High Efficiency	2500 Lumens	2500LH
	3000 Lumens	3000LH
	3500 Lumens	3500LH
	4000 Lumens	4000LH
Color Temperature		
	3000K, 80+ CRI	30K
	3500K, 80+ CRI	35K
	4000K, 80+ CRI	40K
Single Circuit		1C
Voltage		
	120 Volt	120
	277 Volt	277
	UNV Volt	UNV
Control System & Dimming Level		
	0-10V - 1% Dimming	L11
	0-10V - 10% Dimming	LD1
Mounting		
	15/16" Grid	G1
	9/16" Grid	G2
	9/16" Slot Tee	G3
	Drywall Frame Kit	F
Factory Options		
	Air Return	AR
	Chicago Plenum	CP
	Emergency Battery Pack with Integral Test Switch	EM
	6' Flex Whip	FW
Finish: Matte Satin White		WH

Aerion LED		FARL
Nominal Size: 2' x 4'		24
Shielding: Acrylic Diffuser		AC
Lumen Output		
Standard	4000 Lumens	4000L
	4500 Lumens	4500L
	5000 Lumens	5000L
	5500 Lumens	5500L
High Efficiency	4000 Lumens	4000LH
	4500 Lumens	4500LH
	5000 Lumens	5000LH
	5500 Lumens	5500LH
	6000 Lumens	6000LH
Color Temperature		
	3000K, 80+ CRI	30K
	3500K, 80+ CRI	35K
	4000K, 80+ CRI	40K
Single Circuit		1C
Voltage		
	120 Volt	120
	277 Volt	277
	UNV Volt	UNV
Control System & Dimming Level		
	0-10V - 1% Dimming	L11
	0-10V - 10% Dimming	LD1
Mounting		
	15/16" Grid	G1
	9/16" Grid	G2
	9/16" Slot Tee	G3
	Drywall Frame Kit	F
Factory Options		
	Air Return	AR
	Chicago Plenum	CP
	Emergency Battery Pack with Integral Test Switch	EM
	6' Flex Whip	FW
Finish: Matte Satin White		WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less
10 DAY: 300 pieces or less

QS QUICKSHIP TERMS



5 DAY: 100 pieces or less
10 DAY: 300 pieces or less

AMICA[®] 2



Not all features are available for Quickship

AMICA 2

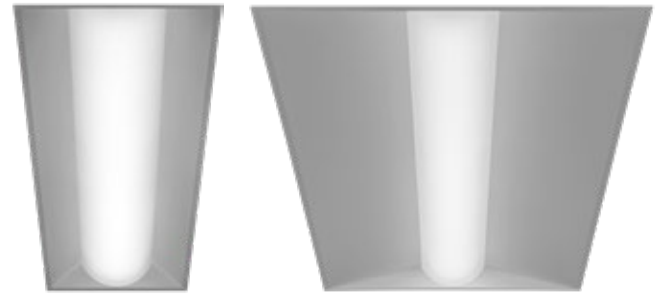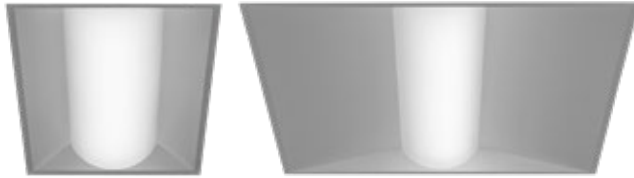

	Amica 2	—	FAM2
	Nominal Size		
	1' x 2'	12	
	2' x 2'	22	
	Shielding: Ribbed Acrylic Diffuser	—	ACR
	Lumen Output		
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	3500 Lumens	3500L	
	4000 Lumens	4000L	
High Efficiency	2000 Lumens	2000LH	
	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
	Color Temperature		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	Single Circuit	—	1C
	120/277 UNV Voltage	—	UNV
	Control System & Dimming Level		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming (Not Right Light as standard, consult factory)	LD1	
	Mounting		
	Grid	G	
	Drywall Frame Kit	F	
	Factory Options		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less

10 DAY: 300 pieces or less

	Amica 2	—	FAM2
	Nominal Size		
	1' x 4'	14	
	2' x 4'	24	
	Shielding: Ribbed Acrylic Diffuser	—	ACR
	Lumen Output		
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
	5500 Lumens	5500L	
	6000 Lumens	6000L	
	6500 Lumens	6500L	
	7000 Lumens	7000L	
High Efficiency	7500 Lumens	7500L	
	4000 Lumens	4000LH	
	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
	6500 Lumens	6500LH	
	Color Temperature		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	Single Circuit	—	1C
	120/277 UNV Voltage	—	UNV
	Control System & Dimming Level		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming (Not Right Light as standard, consult factory)	LD1	
	Mounting		
	Grid	G	
	Drywall Frame Kit	F	
	Factory Options		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less

10 DAY: 300 pieces or less

AMICA[®]

LED



*not all features are available for Quickship



	Amica LED	—	FAML
	Nominal Size: 2' x 2'	—	22
	Shielding: Ribbed Acrylic Diffuser	—	ACR
	Lumen Output		
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
High Efficiency	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
	Color Temperature		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	Single Circuit	—	1C
	Voltage		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	Dimming Level: 0-10V - 10% Dimming	—	LD1
	Mounting		
	15/16" Grid	G1	
	9/16" Grid	G2	
	9/16" Slot Tee	G3	
	Drywall Frame Kit	F	
	Factory Options		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less

10 DAY: 300 pieces or less



	Amica LED	—	FAML
	Nominal Size: 2' x 4'	—	24
	Shielding: Ribbed Acrylic Diffuser	—	ACR
	Lumen Output		
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
High Efficiency	5500 Lumens	5500L	
	4000 Lumens	4000LH	
	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
	Color Temperature		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	Single Circuit	—	1C
	Voltage		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	Dimming Level: 0-10V - 10% Dimming	—	LD1
	Mounting		
	15/16" Grid	G1	
	9/16" Grid	G2	
	9/16" Slot Tee	G3	
	Drywall Frame Kit	F	
	Factory Options		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less

10 DAY: 300 pieces or less

EQUATION[®] 2



Equation 2	—	FEQ2
Nominal Size: 1' x 4'	—	14
Shielding		
Opal Acrylic Lens	AC	
MicroGlow Prismatic Lens	MG	
Lumen Output		
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
3500 Lumens	3500L	
4000 Lumens	4000L	
4500 Lumens	4500L	
5000 Lumens	5000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming (Not Right Light as standard, consult factory)	LD1	
Mounting		
15/16" Grid	G1	
9/16" Grid	G2	
Slot Tee	ST	
Drywall Frame Kit	F	
Surface Mount	SM	
24" Aircraft Cable	C24	
48" Aircraft Cable	C48	
96" Aircraft Cable	C96	
Factory Options		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery Pack with Integral Test Switch	EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

5 DAY: 50 pieces or less

10 DAY: 150 pieces or less



*not all features are available for Quickship

EQUATION 2



Equation 2		FEQ2
Nominal Size: 2' x 2'		22
Shielding		
Opal Acrylic Lens	AC	
MicroGlow Prismatic Lens	MG	
Lumen Output		
Standard	2000 Lumens	2000L
	2500 Lumens	2500L
	3000 Lumens	3000L
	3500 Lumens	3500L
High Efficiency	2500 Lumens	2500LH
	3000 Lumens	3000LH
	3500 Lumens	3500LH
	4000 Lumens	4000LH
	4500 Lumens	4500LH
	5000 Lumens	5000LH
Color Temperature		
3000K, 80+ CRI		30K
3500K, 80+ CRI or 90+ CRI		35K or 935K
4000K, 80+ CRI		40K
Single Circuit		1C
120/277 UNV Voltage		UNV
Control System & Dimming Level		
0-10V - 1% Dimming		L11
0-10V - 10% Dimming (Not Right Light as standard, consult factory)		LD1
Mounting		
15/16" Grid	G1	
9/16" Grid	G2	
Slot Tee	ST	
Drywall Frame Kit	F	
Surface Mount	SM	
24" Aircraft Cable	C24	
48" Aircraft Cable	C48	
96" Aircraft Cable	C96	
Factory Options		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery Pack with Integral Test Switch	EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
Finish: Matte White Finish		WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less
10 DAY: 300 pieces or less



Equation 2		FEQ2
Nominal Size: 2' x 4'		24
Shielding		
Opal Acrylic Lens	AC	
MicroGlow Prismatic Lens	MG	
Lumen Output		
Standard	4000 Lumens	4000L
	4500 Lumens	4500L
	5000 Lumens	5000L
	5500 Lumens	5500L
High Efficiency	4000 Lumens	4000LH
	4500 Lumens	4500LH
	5000 Lumens	5000LH
	5500 Lumens	5500LH
	6000 Lumens	6000LH
	6500 Lumens	6500LH
	7000 Lumens	7000LH
	7500 Lumens	7500LH
	8000 Lumens	8000LH
	8500 Lumens	8500LH
Color Temperature		
3000K, 80+ CRI		30K
3500K, 80+ CRI or 90+ CRI		35K or 935K
4000K, 80+ CRI		40K
Single Circuit		1C
120/277 UNV Voltage		UNV
Control System & Dimming Level		
0-10V - 1% Dimming		L11
0-10V - 10% Dimming (Not Right Light as standard, consult factory)		LD1
Mounting		
15/16" Grid	G1	
9/16" Grid	G2	
Slot Tee	ST	
Drywall Frame Kit	F	
Surface Mount	SM	
24" Aircraft Cable	C24	
48" Aircraft Cable	C48	
96" Aircraft Cable	C96	
Factory Options		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery Pack with Integral Test Switch	EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
Finish: Matte White Finish		WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less
10 DAY: 300 pieces or less

LUNA[®] LED





Luna LED	—	FLUL
Nominal Size: 2' x 2'	—	22
Shielding: Perforated Shield	—	PS
Lumen Output		
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
3500 Lumens	3500L	
4000 Lumens (LD1 & L11 only)	4000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
Grid	G	
Slot Tee	ST	
Drywall Frame Kit	F	
Factory Options		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery	B310	
Positional Clips	EQ	
6' Flex Whip	FW	
Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less

10 DAY: 300 pieces or less



Luna LED	—	FLUL
Nominal Size: 2' x 4'	—	24
Shielding: Perforated Shield	—	PS
Lumen Output		
3000 Lumens*	3000L	
3500 Lumens*	3500L	
4000 Lumens	4000L	
4500 Lumens	4500L	
5000 Lumens	5000L	
5500 Lumens	5500L	
6000 Lumens*	6000L	
6500 Lumens*	6500L	
7000 Lumens* (*LD1 & L11 only)	7000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
Grid	G	
Slot Tee	ST	
Drywall Frame Kit	F	
Factory Options		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery	B310	
Positional Clips	EQ	
6' Flex Whip	FW	
Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less

10 DAY: 300 pieces or less

VEER[®] LED



Veer LED	—	FVRL
Nominal Size: 1' x 4'	—	14
Shielding		
Radial Acrylic Diffuser	ACR	
Flat Acrylic Diffuser	ACF	
Regress Acrylic Diffuser	ACG	
Lumen Output		
2500 Lumens	2500L	
3000 Lumens	3000L	
3500 Lumens	3500L	
4000 Lumens	4000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
Voltage		
120 Volt	120	
277 Volt	277	
UNV Volt	UNV	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming (Not Right Light as standard, consult factory)	LD1	
Mounting		
Grid	G	
Slot Tee	ST	
Drywall Frame Kit	F	
Factory Options		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery Pack with Integral Test Switch	EM	
6' Flex Whip	FW	
Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

10 DAY: 50 pieces or less



*not all features are available for Quickship



	Veer LED	—	FVRL
Nominal Size: 2' x 2'	—		22
Shielding			
Radial Acrylic Diffuser	ACR		
Flat Acrylic Diffuser	ACF		
Regress Acrylic Diffuser	ACG		
Lumen Output			
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
High Efficiency	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
Color Temperature			
3000K, 80+ CRI	30K		
3500K, 80+ CRI	35K		
4000K, 80+ CRI	40K		
Single Circuit	—		1C
Voltage			
120 Volt	120		
277 Volt	277		
UNV Volt	UNV		
Control System & Dimming Level			
0-10V - 1% Dimming	L11		
0-10V - 10% Dimming (Not Right Light as standard, consult factory)	LD1		
Mounting			
Grid	G		
Slot Tee	ST		
Drywall Frame Kit	F		
Factory Options			
Air Return	AR		
Chicago Plenum	CP		
Emergency Battery Pack with Integral Test Switch	EM		
6' Flex Whip	FW		
Finish: Matte White Finish	—		WH

QS QUICKSHIP TERMS

10 DAY: 100 pieces or less

	Veer LED	—	FVRL
Nominal Size: 2' x 4'	—		24
Shielding			
Radial Acrylic Diffuser	ACR		
Flat Acrylic Diffuser	ACF		
Regress Acrylic Diffuser	ACG		
Lumen Output			
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
	5500 Lumens	5500L	
High Efficiency	4000 Lumens	4000LH	
	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
Color Temperature			
3000K, 80+ CRI	30K		
3500K, 80+ CRI	35K		
4000K, 80+ CRI	40K		
Single Circuit	—		1C
Voltage			
120 Volt	120		
277 Volt	277		
UNV Volt	UNV		
Control System & Dimming Level			
0-10V - 1% Dimming	L11		
0-10V - 10% Dimming (Not Right Light as standard, consult factory)	LD1		
Mounting			
Grid	G		
Slot Tee	ST		
Drywall Frame Kit	F		
Factory Options			
Air Return	AR		
Chicago Plenum	CP		
Emergency Battery Pack with Integral Test Switch	EM		
6' Flex Whip	FW		
Finish: Matte White Finish	—		WH

QS QUICKSHIP TERMS

10 DAY: 100 pieces or less



Quickship Guide

2-, 5- & 10-Day Configurations



FOCAL POINT®

Bringing It All To Light®

