



# Quickship Guide

5&10 DAY Configurations



FOCAL POINT®

Bringing It All To Light®



Quickship  
**RED**

**2DAY**  
Configurations

# Quickship Policies

Quickship is a broad, made-to-order offering of architectural luminaires that support all main areas of a project. We leverage our vertical integration and on-site manufacturing capabilities to ship a wide variety of options in 2, 5 and 10 days. Unlike a stock program, Quickship gives you the ability to satisfy tight project schedules without sacrificing quality or selection.

## HOW TO USE THIS GUIDE

The product options included in this guide all qualify for **Quickship** or **Quickship RED**. Simply complete a catalog number by selecting the options you require and clearly mark your order as **Quickship** or **Quickship RED** for fast processing. For more information or an expanded list of options, please consult the individual product cut sheets at [focalpointlights.com](http://focalpointlights.com).

## QUICKSHIP POLICIES

Quickship line items must be denoted as such to ship with the 2-, 5- or 10-day terms of the program whether an entire order is comprised of only Quickship items or it includes both Quickship and standard line items.

Items with different lead times will ship separately unless the order is marked as "SHIP COMPLETE". In that case, the entire order will ship with the longest lead time.

Estimated ship dates (ESD) are determined per the following example: If a clean order is received by 11:00am CST on Monday for a Quickship Red, 2-day item, the ESD will be Wednesday. For a 5-day item, the ESD will be the following Monday. Orders received after 11am will receive an ESD based on the following business day.

## ORDER CHECKLIST

- ✓ Complete and correct catalog numbers
- ✓ **Quickship** or **Quickship RED** clearly denoted in subject line of email and on PO
- ✓ Complete PO with proper terms
- ✓ Run lengths when required
- ✓ EM/EC locations and voltage when required

## REMINDERS

All ship dates are estimated. 2-, 5- and 10-day lead times do not include weekends or holidays.

Consult factory for options or quantities not shown in this guide. Large quantities may not qualify for Quickship or Quickship Red.

Partial shipments may be required based on current factory loads.

Change orders of any kind will affect lead time.



## CONTRACTOR SUPPORT

With our Quickship program and a host of resources found in the Contractor Zone of our website, we support quick-turn and design-build projects from specification to installation.

Learn more at [focalpointlights.com/contractorzone](http://focalpointlights.com/contractorzone)


# Quickship **RED**

**Quickship** and **Quickship RED** give you access to the products you need with the speed that you require. Made-to-order luminaires are available for shipment in 2, 5, or 10 days and, when the job calls for unique designs, our engineering team and US-based manufacturing facility are also here to support you with custom luminaires.


- Linear, perimeter and cove luminaires – individual units, runs, patterns
- ID+ 3.5" Adjustable downlights
- ID+ 3.5" and 4.5" Cylinders
- Architectural troffers



- ID+ 3.5" and 4.5" Downlights and Wall Washers
- Architectural troffers



Most popular options offered for the ID+ 3.5" and 4.5" Downlights and Wall Washers

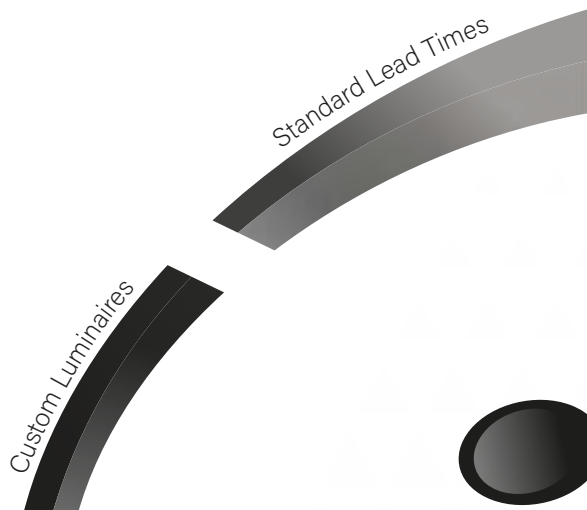

Learn more at [focalpointlights.com/Quickship](https://focalpointlights.com/Quickship)



# Quickship Index



## ID+ DOWNLIGHTS

|                                          |    |
|------------------------------------------|----|
| ID+ 3.5" Downlight & Wall Wash .....     | 06 |
| ID+ 3.5"x3.5" Downlight & Wall Wash..... | 08 |
| ID+ 4.5" Downlight & Wall Wash.....      | 10 |
| ID+ 4.5"x4.5" Downlight & Wall Wash..... | 12 |



## ID+ DOWNLIGHTS & CYLINDERS

|                                                   |    |
|---------------------------------------------------|----|
| ID+ 3.5" & 3.5"x3.5" Adjustable.....              | 14 |
| ID+ 3.5" Downlight & Wall Wash .....              | 16 |
| ID+ 3.5" Trimless Downlight & Wall Wash.....      | 18 |
| ID+ 3.5"x3.5" Downlight & Wall Wash.....          | 20 |
| ID+ 3.5"x3.5" Trimless Downlight & Wall Wash..... | 22 |
| ID+ 4.5" Downlight & Wall Wash.....               | 24 |
| ID+ 4.5" Trimless Downlight & Wall Wash.....      | 26 |
| ID+ 4.5"x4.5" Downlight & Wall Wash.....          | 28 |
| ID+ 4.5"x4.5" Trimless Downlight & Wall Wash..... | 30 |
| ID+ 3.5" Cylinders.....                           | 32 |
| ID+ 4.5" Cylinders.....                           | 34 |



## LINEAR

|                                                      |       |
|------------------------------------------------------|-------|
| Seem® 1 Suspended / Direct/Indirect .....            | 36    |
| Seem® 1 Recessed & Patterns.....                     | 38    |
| Seem® 2 Suspended / Wall Mount.....                  | 40    |
| Seem® 2 Suspended / Wall Mount Direct/Indirect.....  | 42    |
| Seem® 2 Recessed & Patterns / Pop-Down.....          | 43-44 |
| Seem® 4 Suspended / Pop-Down / Wall Mount.....       | 45-46 |
| Seem® 4 Suspended / Wall Mount Direct/Indirect ..... | 47-48 |
| Seem® 4 Recessed & Patterns / Pop-Down.....          | 49-50 |
| Seem® 4-LP.....                                      | 52    |
| Seem® 6 Recessed & Patterns .....                    | 54    |
| Avenue® 6 LED .....                                  | 56    |
| Twelve LED .....                                     | 58    |



## PERIMETER & COVE

|                                                        |    |
|--------------------------------------------------------|----|
| Seem® 2 Perimeter / Grazer / Asymmetric Room Fill..... | 60 |
| Seem® 4 Perimeter / Grazer / Asymmetric Room Fill..... | 62 |
| Covert Lite®.....                                      | 64 |
| Focus Wall Wash.....                                   | 66 |



## ARCHITECTURAL TROFFERS

|                  |       |
|------------------|-------|
| Aerion® .....    | 68    |
| Amica® 2 .....   | 70    |
| Amica® LED ..... | 72    |
| Equation® 2..... | 73-74 |
| Luna® LED.....   | 76    |
| Veer® LED .....  | 77-78 |

## FEATURE KEY



Right Light



Wet Location



DLC® Listed



Energy Star




# ID+ 3.5"

## DOWNLIGHT & WALL WASH



\*3.5" Downlights

# ID+ 3.5" DOWNLIGHT & WALL WASH

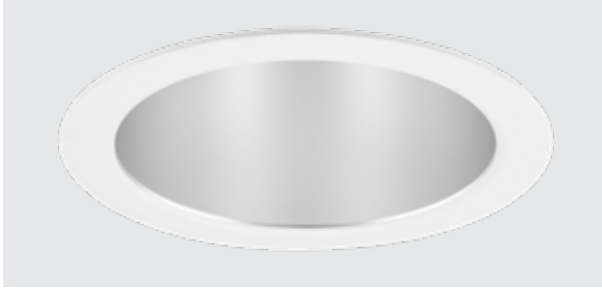

## Housing Ordering

| ID+ 3.5" Downlight                           | —     | FLC3D      |
|----------------------------------------------|-------|------------|
| <b>Trim Type:</b> Round Overlap              | —     | <b>RO</b>  |
| <b>Color Options:</b> Standard White, 80 CRI | —     | <b>SW</b>  |
| <b>Lumen Output</b>                          |       |            |
| 1100 Lumen                                   | 1100L |            |
| 1500 Lumen                                   | 1500L |            |
| <b>Voltage</b>                               |       |            |
| 120V                                         | 120   |            |
| 277V                                         | 277   |            |
| <b>Control System &amp; Dimming Level</b>    |       |            |
| 0-10V - 10% Dimming                          | —     | <b>LD1</b> |
| <b>Housing</b>                               |       |            |
| Thermally Protected, Non-IC / Airtight       | —     | <b>T</b>   |
| <b>Factory Options</b>                       |       |            |
| Bar Hangers                                  | BH    |            |
| <b>Trim &amp; LED Module</b>                 |       |            |
| <b>Aperture:</b> 3.5" Round Reflector        | —     | <b>LC3</b> |
| <b>Trim Type:</b> Round Overlap              | —     | <b>RO</b>  |
| <b>Color Options:</b> Standard White, 80 CRI | —     | <b>SW</b>  |
| <b>Lumen Output</b>                          |       |            |
| (Trim & housing output must match)           |       |            |
| 1100 Lumen                                   | 1100L |            |
| 1500 Lumen                                   | 1500L |            |
| <b>Color Temperature</b>                     |       |            |
| 3000K, 80+ CRI                               | 30K   |            |
| 3500K, 80+ CRI                               | 35K   |            |
| <b>Optic:</b> Tall Cone with 50° cut-off     | —     | <b>DNT</b> |
| <b>Distribution:</b> Wide Flood              | —     | <b>WFL</b> |
| <b>Finish:</b> Clear Diffuse                 | —     | <b>CD</b>  |
| <b>Flange Finish:</b> White Painted          | —     | <b>WP</b>  |

## **QS** QUICKSHIP TERMS

**2 DAY:** 200 pieces or less



## Housing Ordering

| ID+ 3.5" Wall Wash                           | —     | FLC3W      |
|----------------------------------------------|-------|------------|
| <b>Trim Type:</b> Round Overlap              | —     | <b>RO</b>  |
| <b>Color Options:</b> Standard White, 80 CRI | —     | <b>SW</b>  |
| <b>Lumen Output</b>                          |       |            |
| 1100 Lumen                                   | 1100L |            |
| 1500 Lumen                                   | 1500L |            |
| <b>Voltage</b>                               |       |            |
| 120V                                         | 120   |            |
| 277V                                         | 277   |            |
| <b>Control System &amp; Dimming Level</b>    |       |            |
| 0-10V - 10% Dimming                          | —     | <b>LD1</b> |
| <b>Housing Type</b>                          |       |            |
| Thermally Protected, Non-IC                  | —     | <b>T</b>   |
| <b>Factory Options</b>                       |       |            |
| Bar Hangers                                  | BH    |            |
| <b>Trim &amp; LED Module</b>                 |       |            |
| <b>Aperture:</b> 3.5" Round Reflector        | —     | <b>LC3</b> |
| <b>Trim Type:</b> Round Overlap              | —     | <b>RO</b>  |
| <b>Color Options:</b> Standard White, 80 CRI | —     | <b>SW</b>  |
| <b>Lumen Output</b>                          |       |            |
| (Trim & housing output must match)           |       |            |
| 1100 Lumen                                   | 1100L |            |
| 1500 Lumen                                   | 1500L |            |
| <b>Color Temperature</b>                     |       |            |
| 3000K, 80+ CRI                               | 30K   |            |
| 3500K, 80+ CRI                               | 35K   |            |
| <b>Optic:</b> Short Cone with 60° cut-off    | —     | <b>WWS</b> |
| <b>Finish:</b> Clear Diffuse                 | —     | <b>CD</b>  |
| <b>Flange Finish:</b> White Painted          | —     | <b>WP</b>  |

## **QS** QUICKSHIP TERMS

**2 DAY:** 100 pieces or less



# ID+ 3.5" X 3.5"

DOWNLIGHT & WALL WASH



\*3.5" x 3.5" Downlights

# ID+ 3.5" x 3.5" DOWNLIGHT & WALL WASH

**Q<sup>2</sup>**  
DAY  
Configurations



## Housing Ordering

|                                              |       |               |
|----------------------------------------------|-------|---------------|
| <b>ID+ 3.5"x3.5" Downlight</b>               | —     | <b>FLC33D</b> |
| <b>Trim Type:</b> Square Die-Cast Overlap    | —     | <b>SDO</b>    |
| <b>Color Options:</b> Standard White, 80 CRI | —     | <b>SW</b>     |
| <b>Lumen Output</b>                          |       |               |
| 1100 Lumen                                   | 1100L |               |
| 1500 Lumen                                   | 1500L |               |
| <b>Voltage</b>                               |       |               |
| 120V                                         | 120   |               |
| 277V                                         | 277   |               |
| <b>Control System &amp; Dimming Level</b>    |       |               |
| 0-10V - 10% Dimming                          | —     | <b>LD1</b>    |
| <b>Housing Type</b>                          |       |               |
| Thermally Protected, Non-IC / Airtight       | —     | <b>T</b>      |
| <b>Factory Options</b>                       |       |               |
| Bar Hangers                                  | BH    |               |

## Trim & LED Module

|                                              |       |             |
|----------------------------------------------|-------|-------------|
| <b>Aperture:</b> 3.5" Square Reflector       | —     | <b>LC33</b> |
| <b>Trim Type:</b> Square Die-Cast Overlap    | —     | <b>SDO</b>  |
| <b>Color Options:</b> Standard White, 80 CRI | —     | <b>SW</b>   |
| <b>Lumen Output</b>                          |       |             |
| (Trim & housing output must match)           |       |             |
| 1100 Lumen                                   | 1100L |             |
| 1500 Lumen                                   | 1500L |             |
| <b>Color Temperature</b>                     |       |             |
| 3000K, 80+ CRI                               | 30K   |             |
| 3500K, 80+ CRI                               | 35K   |             |
| <b>Optic:</b> Tall Cone with 50° cut-off     | —     | <b>DNT</b>  |
| <b>Distribution:</b> Wide Flood              | —     | <b>WFL</b>  |
| <b>Finish:</b> Clear Diffuse                 | —     | <b>CD</b>   |
| <b>Flange Finish:</b> White Painted          | —     | <b>WP</b>   |

**QS QUICKSHIP TERMS**

**2 DAY:** 200 pieces or less



## Housing Ordering

|                                              |       |               |
|----------------------------------------------|-------|---------------|
| <b>ID+ 3.5"x3.5" Wall Wash</b>               | —     | <b>FLC33W</b> |
| <b>Trim Type:</b> Square Die-Cast Overlap    | —     | <b>SDO</b>    |
| <b>Color Options:</b> Standard White, 80 CRI | —     | <b>SW</b>     |
| <b>Lumen Output</b>                          |       |               |
| 1100 Lumen                                   | 1100L |               |
| 1500 Lumen                                   | 1500L |               |
| <b>Voltage</b>                               |       |               |
| 120V                                         | 120   |               |
| 277V                                         | 277   |               |
| <b>Control System &amp; Dimming Level</b>    |       |               |
| 0-10V - 10% Dimming                          | —     | <b>LD1</b>    |
| <b>Housing Type</b>                          |       |               |
| Thermally Protected, Non-IC                  | —     | <b>T</b>      |
| <b>Factory Options</b>                       |       |               |
| Bar Hangers                                  | BH    |               |

## Trim & LED Module

|                                              |       |             |
|----------------------------------------------|-------|-------------|
| <b>Aperture:</b> 3.5" Square Reflector       | —     | <b>LC33</b> |
| <b>Trim Type:</b> Square Die-Cast Overlap    | —     | <b>SDO</b>  |
| <b>Color Options:</b> Standard White, 80 CRI | —     | <b>SW</b>   |
| <b>Lumen Output</b>                          |       |             |
| (Trim & housing output must match)           |       |             |
| 1100 Lumen                                   | 1100L |             |
| 1500 Lumen                                   | 1500L |             |
| <b>Color Temperature</b>                     |       |             |
| 3000K, 80+ CRI                               | 30K   |             |
| 3500K, 80+ CRI                               | 35K   |             |
| <b>Optic:</b> Short Cone with 60° cut-off    | —     | <b>WWS</b>  |
| <b>Finish:</b> Clear Diffuse                 | —     | <b>CD</b>   |
| <b>Flange Finish:</b> White Painted          | —     | <b>WP</b>   |

**QS QUICKSHIP TERMS**

**2 DAY:** 100 pieces or less



# ID+ 4.5"

## DOWNLIGHT & WALL WASH



\*4.5" Downlights

# ID+ 4.5" DOWNLIGHT & WALL WASH



## Housing Ordering

|                                             |       |              |
|---------------------------------------------|-------|--------------|
| <b>ID+ 4.5" Downlight</b>                   | —     | <b>FLC4D</b> |
| <b>Trim Type:</b> Round Overlap             | —     | <b>RO</b>    |
| <b>Color Option:</b> Standard White, 80 CRI | —     | <b>SW</b>    |
| <b>Lumen Output</b>                         |       |              |
| 1000 Lumens                                 | 1000L |              |
| 1500 Lumens                                 | 1500L |              |
| <b>Voltage</b>                              |       |              |
| 120V                                        | 120   |              |
| 277V                                        | 277   |              |
| <b>Control System &amp; Dimming Level</b>   |       |              |
| 0-10V - 10% Dimming                         | —     | <b>LD1</b>   |
| <b>Housing Type:</b> Thermally Protected    | —     | <b>T</b>     |
| <b>Factory Options</b>                      |       |              |
| Bar Hangers                                 | BH    |              |

## Trim & LED Module

|                                                           |       |            |
|-----------------------------------------------------------|-------|------------|
| <b>Aperture:</b> 4.5" Round Reflector                     | —     | <b>LC4</b> |
| <b>Trim Type:</b> Round Overlap                           | —     | <b>RO</b>  |
| <b>Lumen Output</b><br>(Trim & housing output must match) |       |            |
| 1000 Lumens                                               | 1000L |            |
| 1500 Lumens                                               | 1500L |            |
| <b>Color Temperature</b>                                  |       |            |
| 3000K, 80+ CRI                                            | 30K   |            |
| 3500K, 80+ CRI                                            | 35K   |            |
| <b>Optic:</b> Downlight with 50° cut-off                  | —     | <b>DN</b>  |
| <b>Distribution:</b> Wide Flood                           | —     | <b>WFL</b> |
| <b>Reflector Color:</b> Clear Diffuse                     | —     | <b>CD</b>  |
| <b>Flange Finish:</b> White Painted                       | —     | <b>WP</b>  |



## QUICKSHIP TERMS

**2 DAY:** 200 pieces or less

## Housing Ordering

|                                             |       |              |
|---------------------------------------------|-------|--------------|
| <b>ID+ 4.5" Downlight</b>                   | —     | <b>FLC4W</b> |
| <b>Trim Type:</b> Round Overlap             | —     | <b>RO</b>    |
| <b>Color Option:</b> Standard White, 80 CRI | —     | <b>SW</b>    |
| <b>Lumen Output</b>                         |       |              |
| 1000 Lumens                                 | 1000L |              |
| 1500 Lumens                                 | 1500L |              |
| <b>Voltage</b>                              |       |              |
| 120V                                        | 120   |              |
| 277V                                        | 277   |              |
| <b>Control System &amp; Dimming Level</b>   |       |              |
| 0-10V - 10% Dimming                         | —     | <b>LD1</b>   |
| <b>Housing Type:</b> Thermally Protected    | —     | <b>T</b>     |
| <b>Factory Options</b>                      |       |              |
| Bar Hangers                                 | BH    |              |

## Trim & LED Module

|                                                           |       |            |
|-----------------------------------------------------------|-------|------------|
| <b>Aperture:</b> 4.5" Round Reflector                     | —     | <b>LC4</b> |
| <b>Trim Type:</b> Round Overlap                           | —     | <b>RO</b>  |
| <b>Lumen Output</b><br>(Trim & housing output must match) |       |            |
| 1000 Lumens                                               | 1000L |            |
| 1500 Lumens                                               | 1500L |            |
| <b>Color Temperature</b>                                  |       |            |
| 3000K, 80+ CRI                                            | 30K   |            |
| 3500K, 80+ CRI                                            | 35K   |            |
| <b>Optic:</b> Wall Wash                                   | —     | <b>WW</b>  |
| <b>Reflector Color:</b> Clear Diffuse                     | —     | <b>CD</b>  |
| <b>Flange Finish:</b> White Painted                       | —     | <b>WP</b>  |



## QUICKSHIP TERMS

**2 DAY:** 100 pieces or less



# ID+ 4.5" X 4.5"

## DOWNLIGHT & WALL WASH



\*4.5"x4.5" Downlights



# ID+ 4.5" x 4.5" DOWNLIGHT & WALL WASH

**Q2**  
DAY  
Configurations



## Housing Ordering

|                                             |       |               |
|---------------------------------------------|-------|---------------|
| <b>ID+ 4.5" x 4.5" Downlight</b>            | —     | <b>FLC44D</b> |
| <b>Trim Type:</b> Square Overlap            | —     | <b>SO</b>     |
| <b>Color Option:</b> Standard White, 80 CRI | —     | <b>SW</b>     |
| <b>Lumen Output</b>                         |       |               |
| 1000 Lumens                                 | 1000L |               |
| 1500 Lumens                                 | 1500L |               |
| <b>Voltage</b>                              |       |               |
| 120V                                        | 120   |               |
| 277V                                        | 277   |               |
| <b>Control System &amp; Dimming Level</b>   |       |               |
| 0-10V - 10% Dimming                         | —     | <b>LD1</b>    |
| <b>Housing Type:</b> Thermally Protected    | —     | <b>T</b>      |
| <b>Factory Options</b>                      |       |               |
| Bar Hangers                                 | BH    |               |

## Trim & LED Module

|                                                           |       |             |
|-----------------------------------------------------------|-------|-------------|
| <b>Aperture:</b> 4.5" Square Reflector                    | —     | <b>LC44</b> |
| <b>Trim Type:</b> Square Die-Cast Overlap                 | —     | <b>SDO</b>  |
| <b>Lumen Output</b><br>(Trim & housing output must match) |       |             |
| 1000 Lumens                                               | 1000L |             |
| 1500 Lumens                                               | 1500L |             |
| <b>Color Temperature</b>                                  |       |             |
| 3000K, 80+ CRI                                            | 30K   |             |
| 3500K, 80+ CRI                                            | 35K   |             |
| <b>Optic:</b> Downlight with 50° cut-off                  | —     | <b>DN</b>   |
| <b>Distribution:</b> Wide Flood                           | —     | <b>WFL</b>  |
| <b>Reflector Color:</b> Clear Diffuse                     | —     | <b>CD</b>   |
| <b>Flange Finish:</b> White Painted                       | —     | <b>WP</b>   |

**QS** QUICKSHIP TERMS

**2 DAY:** 200 pieces or less



## Housing Ordering

|                                             |       |               |
|---------------------------------------------|-------|---------------|
| <b>ID+ 4.5" x 4.5" Wall Wash</b>            | —     | <b>FLC44W</b> |
| <b>Trim Type:</b> Square Overlap            | —     | <b>SO</b>     |
| <b>Color Option:</b> Standard White, 80 CRI | —     | <b>SW</b>     |
| <b>Lumen Output</b>                         |       |               |
| 1000 Lumens                                 | 1000L |               |
| 1500 Lumens                                 | 1500L |               |
| <b>Voltage</b>                              |       |               |
| 120V                                        | 120   |               |
| 277V                                        | 277   |               |
| <b>Control System &amp; Dimming Level</b>   |       |               |
| 0-10V - 10% Dimming                         | —     | <b>LD1</b>    |
| <b>Housing Type:</b> Thermally Protected    | —     | <b>T</b>      |
| <b>Factory Options</b>                      |       |               |
| Bar Hangers                                 | BH    |               |

## Trim & LED Module


|                                                           |       |             |
|-----------------------------------------------------------|-------|-------------|
| <b>Aperture:</b> 4.5" Square Reflector                    | —     | <b>LC44</b> |
| <b>Trim Type:</b> Square Die-Cast Overlap                 | —     | <b>SDO</b>  |
| <b>Lumen Output</b><br>(Trim & housing output must match) |       |             |
| 1000 Lumens                                               | 1000L |             |
| 1500 Lumens                                               | 1500L |             |
| <b>Color Temperature</b>                                  |       |             |
| 3000K, 80+ CRI                                            | 30K   |             |
| 3500K, 80+ CRI                                            | 35K   |             |
| <b>Optic:</b> Wall Wash                                   | —     | <b>WW</b>   |
| <b>Reflector Color:</b> Clear Diffuse                     | —     | <b>CD</b>   |
| <b>Flange Finish:</b> White Painted                       | —     | <b>WP</b>   |

**QS** QUICKSHIP TERMS

**2 DAY:** 100 pieces or less

ID + 3.5"

ADJUSTABLE

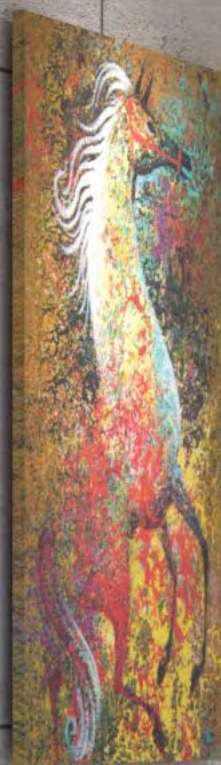

# ID+ 3.5" ADJUSTABLE



| ID+ 3.5" Adjustable                                                                 | —                  | FLCS3       |
|-------------------------------------------------------------------------------------|--------------------|-------------|
| <b>Trim Type: Round Overlap</b>                                                     | —                  | <b>RO</b>   |
| <b>Lumen Output</b>                                                                 |                    |             |
| 700 Lumen                                                                           | 700L               |             |
| 900 Lumen                                                                           | 900L               |             |
| 1100 Lumen                                                                          | 1100L              |             |
| 1300 Lumen                                                                          | 1300L              |             |
| <b>Color Temperature</b>                                                            |                    |             |
| 2700K, 80+ CRI <b>or</b> 90+ CRI                                                    | 27K <b>or</b> 927K |             |
| 3000K, 80+ CRI <b>or</b> 90+ CRI                                                    | 30K <b>or</b> 930K |             |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                    | 35K <b>or</b> 935K |             |
| <b>Distribution</b>                                                                 |                    |             |
| 15° Spot<br>(AAS trim optic only)                                                   | SP                 |             |
| 18° Spot with Solite Lens                                                           | SPA                |             |
| 25° Narrow Flood                                                                    | NFL                |             |
| 40° Flood                                                                           | FL                 |             |
| 30° x 15° Linear Spread Lens                                                        | LS                 |             |
| <b>Voltage</b>                                                                      |                    |             |
| 120V                                                                                | 120                |             |
| 277V                                                                                | 277                |             |
| <b>Control System &amp; Dimming Level</b>                                           |                    |             |
| 0-10V - 0% Dimming                                                                  | LZ1                |             |
| 0-10V - 1% Dimming                                                                  | L11                |             |
| 0-10V - 10% Dimming                                                                 | LD1                |             |
| Forward Phase<br>(120V only. 700L & 1100L only.)                                    | LFP                |             |
| <b>Housing Type</b>                                                                 |                    |             |
| IC Rated / Airtight<br>(Available options: 700L, 900L & 1100L)                      | IC                 |             |
| Thermally Protected, Non-IC                                                         | T                  |             |
| <b>Factory Options</b>                                                              |                    |             |
| Bar Hangers                                                                         | BH                 |             |
| Chicago Plenum / National Plenum                                                    | CP                 |             |
| <b>Aperture: 3.5" Round Aperture</b>                                                | —                  | <b>LCS3</b> |
| <b>Trim Type: Round Overlap</b>                                                     | —                  | <b>RO</b>   |
| <b>Optic</b>                                                                        |                    |             |
| Adjustable Accent<br>(Solite lens standard, wet location.)                          | AA                 |             |
| Adjustable Accent - 15° Spot<br>(Open optic, no wet location. SP distribution only) | AAS                |             |
| <b>Reflector Color</b>                                                              |                    |             |
| Clear Diffuse                                                                       | CD                 |             |
| White                                                                               | WH                 |             |
| <b>Flange Finish</b>                                                                |                    |             |
| (Leave blank for Clear Diffuse finish)                                              |                    |             |
| Black                                                                               | BK                 |             |
| White                                                                               | WH                 |             |

| ID+ 3.5"x3.5" Adjustable                                                            | —                  | FLCS33       |
|-------------------------------------------------------------------------------------|--------------------|--------------|
| <b>Trim Type: Square Overlap</b>                                                    | —                  | <b>SO</b>    |
| <b>Lumen Output</b>                                                                 |                    |              |
| 700 Lumen                                                                           | 700L               |              |
| 900 Lumen                                                                           | 900L               |              |
| 1100 Lumen                                                                          | 1100L              |              |
| <b>Color Temperature</b>                                                            |                    |              |
| 2700K, 80+ CRI <b>or</b> 90+ CRI                                                    | 27K <b>or</b> 927K |              |
| 3000K, 80+ CRI <b>or</b> 90+ CRI                                                    | 30K <b>or</b> 930K |              |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                    | 35K <b>or</b> 935K |              |
| <b>Distribution</b>                                                                 |                    |              |
| 15° Spot<br>(AAS trim optic only)                                                   | SP                 |              |
| 18° Spot with Solite Lens                                                           | SPA                |              |
| 25° Narrow Flood                                                                    | NFL                |              |
| 40° Flood                                                                           | FL                 |              |
| 30° x 15° Linear Spread Lens                                                        | LS                 |              |
| <b>Voltage</b>                                                                      |                    |              |
| 120V                                                                                | 120                |              |
| 277V                                                                                | 277                |              |
| <b>Control System &amp; Dimming Level</b>                                           |                    |              |
| 0-10V - 0% Dimming                                                                  | LZ1                |              |
| 0-10V - 1% Dimming                                                                  | L11                |              |
| 0-10V - 10% Dimming                                                                 | LD1                |              |
| Forward Phase<br>(120V only. 700L & 900L only.)                                     | LFP                |              |
| <b>Housing Type</b>                                                                 |                    |              |
| IC Rated / Airtight<br>(Available options: 700L, 900L)                              | IC                 |              |
| Thermally Protected, Non-IC                                                         | T                  |              |
| <b>Factory Options</b>                                                              |                    |              |
| Bar Hangers                                                                         | BH                 |              |
| Chicago Plenum / National Plenum                                                    | CP                 |              |
| <b>Aperture: 3.5" Square Aperture</b>                                               | —                  | <b>LCS33</b> |
| <b>Trim Type: Square Overlap</b>                                                    | —                  | <b>SO</b>    |
| <b>Optic</b>                                                                        |                    |              |
| Adjustable Accent<br>(Solite lens standard, wet location.)                          | AA                 |              |
| Adjustable Accent - 15° Spot<br>(Open optic, no wet location. SP distribution only) | AAS                |              |
| <b>Reflector Color</b>                                                              |                    |              |
| Clear Diffuse                                                                       | CD                 |              |
| White                                                                               | WH                 |              |
| <b>Flange Finish</b>                                                                |                    |              |
| (Leave blank for Clear Diffuse finish)                                              |                    |              |
| Black                                                                               | BK                 |              |
| White                                                                               | WH                 |              |



**10 DAY:** 100 pieces or less



**10 DAY:** 100 pieces or less





# ID+ 3.5"

## DOWNLIGHT & WALL WASH



\*3.5" Downlights

# ID+ 3.5" DOWNLIGHT & WALL WASH



## Housing Ordering

| ID+ 3.5" Downlight                                                                                     | —     | FLC3D |
|--------------------------------------------------------------------------------------------------------|-------|-------|
| Trim Type: Round Overlap                                                                               | —     | RO    |
| Color Options: Standard White, 80 & 90 CRI                                                             | —     | SW    |
| <b>Lumen Output</b>                                                                                    |       |       |
| 700 Lumen (Not available with LFP)                                                                     | 700L  |       |
| 900 Lumen (Not available with LFP)                                                                     | 900L  |       |
| 1100 Lumen                                                                                             | 1100L |       |
| 1300 Lumen                                                                                             | 1300L |       |
| 1500 Lumen                                                                                             | 1500L |       |
| 1700 Lumen                                                                                             | 1700L |       |
| 1900 Lumen                                                                                             | 1900L |       |
| 2100 Lumen                                                                                             | 2100L |       |
| <b>Voltage</b>                                                                                         |       |       |
| 120/270 Volt<br>(IC-rated housing: SW - 1700lm max.<br>T-rated housing: SW - 1100lm max.)              | UNV   |       |
| 120V (T-rated housing only)                                                                            | 120   |       |
| 277V (T-rated housing only)                                                                            | 277   |       |
| <b>Control System &amp; Dimming Level</b>                                                              |       |       |
| 0-10V - 0% Dimming                                                                                     | LZ1   |       |
| 0-10V - 1% Dimming                                                                                     | L11   |       |
| 0-10V - 10% Dimming                                                                                    | LD1   |       |
| Forward Phase (120V only)                                                                              | LFP   |       |
| <b>Housing Type</b>                                                                                    |       |       |
| IC Rated / Airtight                                                                                    | IC    |       |
| Thermally Protected, Non-IC / Airtight                                                                 | T     |       |
| <b>Factory Options</b>                                                                                 |       |       |
| Bar Hangers                                                                                            | BH    |       |
| Chicago Plenum                                                                                         | CP    |       |
| Emergency Battery with<br>Remote Test Switch<br>(T-rated housing only. Above ceiling access required.) | EMR   |       |

## Trim & LED Module

|                                                                                      |             |     |
|--------------------------------------------------------------------------------------|-------------|-----|
| <b>Aperture: 3.5" Round Reflector</b>                                                | —           | LC3 |
| Trim Type: Round Overlap                                                             | —           | RO  |
| Color Options: Standard White, 80 & 90 CRI                                           | —           | SW  |
| <b>Lumen Output</b><br>(Trim & housing output must match)                            |             |     |
| 700 Lumen                                                                            | 700L        |     |
| 900 Lumen                                                                            | 900L        |     |
| 1100 Lumen                                                                           | 1100L       |     |
| 1300 Lumen                                                                           | 1300L       |     |
| 1500 Lumen                                                                           | 1500L       |     |
| 1700 Lumen                                                                           | 1700L       |     |
| 1900 Lumen                                                                           | 1900L       |     |
| 2100 Lumen                                                                           | 2100L       |     |
| <b>Color Temperature</b>                                                             |             |     |
| 2700K, 80+ CRI or 90+ CRI                                                            | 27K or 927K |     |
| 3000K, 80+ CRI                                                                       | 30K         |     |
| 3500K, 80+ CRI                                                                       | 35K         |     |
| <b>Optic</b>                                                                         |             |     |
| Tall Cone with 50° cut-off                                                           | DNT         |     |
| Short Cone with 60° cut-off                                                          | DNS         |     |
| <b>Distribution</b>                                                                  |             |     |
| Narrow Flood                                                                         | NFL         |     |
| Flood1                                                                               | FL1         |     |
| Flood 2                                                                              | FL2         |     |
| Wide Flood                                                                           | WFL         |     |
| Very Wide Flood                                                                      | VWFL        |     |
| <b>Finish</b>                                                                        |             |     |
| Clear Diffuse                                                                        | CD          |     |
| White                                                                                | WH          |     |
| <b>Optional Flange Finish</b><br>(CD finish only. For matching finishes leave blank) |             |     |
| White Painted                                                                        | WP          |     |

**QS QUICKSHIP TERMS**

**5 DAY:** 200 pieces or less



## Housing Ordering

| ID+ 3.5" Wall Wash                                                                        | —     | FLC3W |
|-------------------------------------------------------------------------------------------|-------|-------|
| Trim Type: Round Overlap                                                                  | —     | RO    |
| Color Options: Standard White, 80 & 90 CRI                                                | —     | SW    |
| <b>Lumen Output</b>                                                                       |       |       |
| 700 Lumen (Not available with LFP)                                                        | 700L  |       |
| 900 Lumen (Not available with LFP)                                                        | 900L  |       |
| 1100 Lumen                                                                                | 1100L |       |
| 1300 Lumen                                                                                | 1300L |       |
| 1500 Lumen                                                                                | 1500L |       |
| 1700 Lumen                                                                                | 1700L |       |
| 1900 Lumen                                                                                | 1900L |       |
| 2100 Lumen                                                                                | 2100L |       |
| <b>Voltage</b>                                                                            |       |       |
| 120/270 Volt<br>(IC-rated housing: SW - 1700lm max.<br>T-rated housing: SW - 1100lm max.) | UNV   |       |
| 120V (T-rated housing only)                                                               | 120   |       |
| 277V (T-rated housing only)                                                               | 277   |       |
| <b>Control System &amp; Dimming Level</b>                                                 |       |       |
| 0-10V - 0% Dimming                                                                        | LZ1   |       |
| 0-10V - 1% Dimming                                                                        | L11   |       |
| 0-10V - 10% Dimming                                                                       | LD1   |       |
| Forward Phase (120V only)                                                                 | LFP   |       |
| <b>Housing Type</b>                                                                       |       |       |
| IC Rated / Airtight                                                                       | IC    |       |
| Thermally Protected, Non-IC                                                               | T     |       |
| <b>Factory Options</b>                                                                    |       |       |
| Bar Hangers                                                                               | BH    |       |
| Chicago Plenum                                                                            | CP    |       |

## Trim & LED Module

|                                                                                      |             |    |
|--------------------------------------------------------------------------------------|-------------|----|
| <b>Aperture</b>                                                                      |             |    |
| 3.5" Round Reflector                                                                 | LC3         |    |
| 3.5" Round Airtight Reflector                                                        | LC3AT       |    |
| Trim Type: Round Overlap                                                             | —           | RO |
| Color Options: Standard White, 80 & 90 CRI                                           | —           | SW |
| <b>Lumen Output</b><br>(Trim & housing output must match)                            |             |    |
| 700 Lumen                                                                            | 700L        |    |
| 900 Lumen                                                                            | 900L        |    |
| 1100 Lumen                                                                           | 1100L       |    |
| 1300 Lumen                                                                           | 1300L       |    |
| 1500 Lumen                                                                           | 1500L       |    |
| 1700 Lumen                                                                           | 1700L       |    |
| 1900 Lumen                                                                           | 1900L       |    |
| 2100 Lumen                                                                           | 2100L       |    |
| <b>Color Temperature</b>                                                             |             |    |
| 2700K, 80+ CRI or 90+ CRI                                                            | 27K or 927K |    |
| 3000K, 80+ CRI                                                                       | 30K         |    |
| 3500K, 80+ CRI                                                                       | 35K         |    |
| <b>Optic</b>                                                                         |             |    |
| Tall Cone with 50° cut-off                                                           | WWT         |    |
| Short Cone with 60° cut-off                                                          | WWS         |    |
| <b>Finish</b>                                                                        |             |    |
| Clear Diffuse                                                                        | CD          |    |
| White                                                                                | WH          |    |
| <b>Optional Flange Finish</b><br>(CD finish only. For matching finishes leave blank) |             |    |
| White Painted                                                                        | WP          |    |

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less



# ID+3.5" TRIMLESS DOWNLIGHT & WALL WASH



\*3.5" Downlights



# ID+ 3.5" TRIMLESS DOWNLIGHT & WALL WASH



## Housing Ordering

| ID+ 3.5" Downlight                                                                        | —     | FLC3D |
|-------------------------------------------------------------------------------------------|-------|-------|
| Trim Type: Round Trimless                                                                 | —     | RT    |
| Color Options: Standard White, 80 & 90 CRI                                                | —     | SW    |
| Lumen Output                                                                              |       |       |
| 700 Lumen (Not available with LFP)                                                        | 700L  |       |
| 900 Lumen (Not available with LFP)                                                        | 900L  |       |
| 1100 Lumen                                                                                | 1100L |       |
| 1300 Lumen                                                                                | 1300L |       |
| 1500 Lumen                                                                                | 1500L |       |
| 1700 Lumen                                                                                | 1700L |       |
| 1900 Lumen                                                                                | 1900L |       |
| 2100 Lumen                                                                                | 2100L |       |
| Voltage                                                                                   |       |       |
| 120/270 Volt<br>(IC-rated housing: SW - 1700lm max.<br>T-rated housing: SW - 1100lm max.) | UNV   |       |
| 120V (T-rated housing only)                                                               | 120   |       |
| 277V (T-rated housing only)                                                               | 277   |       |
| Control System & Dimming Level                                                            |       |       |
| 0-10V - 0% Dimming                                                                        | LZ1   |       |
| 0-10V - 1% Dimming                                                                        | L11   |       |
| 0-10V - 10% Dimming                                                                       | LD1   |       |
| Forward Phase (120V only)                                                                 | LFP   |       |
| Housing Type                                                                              |       |       |
| IC Rated / Airtight                                                                       | IC    |       |
| Thermally Protected, Non-IC / Airtight                                                    | T     |       |
| Factory Options                                                                           |       |       |
| Bar Hangers                                                                               | BH    |       |
| Chicago Plenum                                                                            | CP    |       |

## Trim & LED Module

|                                                    |             |     |
|----------------------------------------------------|-------------|-----|
| Aperture: 3.5" Round Reflector                     | —           | LC3 |
| Trim Type: Round Trimless                          | —           | RT  |
| Color Options: Standard White, 80 & 90 CRI         | —           | SW  |
| Lumen Output<br>(Trim & housing output must match) |             |     |
| 700 Lumen                                          | 700L        |     |
| 900 Lumen                                          | 900L        |     |
| 1100 Lumen                                         | 1100L       |     |
| 1300 Lumen                                         | 1300L       |     |
| 1500 Lumen                                         | 1500L       |     |
| 1700 Lumen                                         | 1700L       |     |
| 1900 Lumen                                         | 1900L       |     |
| 2100 Lumen                                         | 2100L       |     |
| Color Temperature                                  |             |     |
| 2700K, 80+ CRI or 90+ CRI                          | 27K or 927K |     |
| 3000K, 80+ CRI                                     | 30K         |     |
| 3500K, 80+ CRI                                     | 35K         |     |
| Optic                                              |             |     |
| Tall Cone with 50° cut-off                         | DNT         |     |
| Short Cone with 60° cut-off                        | DNS         |     |
| Distribution                                       |             |     |
| Narrow Flood                                       | NFL         |     |
| Flood1                                             | FL1         |     |
| Flood 2                                            | FL2         |     |
| Wide Flood                                         | WFL         |     |
| Finish                                             |             |     |
| Clear Diffuse                                      | CD          |     |
| White                                              | WH          |     |

## Housing Ordering

| ID+ 3.5" Wall Wash                                                                        | —     | FLC3W |
|-------------------------------------------------------------------------------------------|-------|-------|
| Trim Type: Round Trimless                                                                 | —     | RT    |
| Color Options: Standard White, 80 & 90 CRI                                                | —     | SW    |
| Lumen Output                                                                              |       |       |
| 700 Lumen (Not available with LFP)                                                        | 700L  |       |
| 900 Lumen (Not available with LFP)                                                        | 900L  |       |
| 1100 Lumen                                                                                | 1100L |       |
| 1300 Lumen                                                                                | 1300L |       |
| 1500 Lumen                                                                                | 1500L |       |
| 1700 Lumen                                                                                | 1700L |       |
| 1900 Lumen                                                                                | 1900L |       |
| 2100 Lumen                                                                                | 2100L |       |
| Voltage                                                                                   |       |       |
| 120/270 Volt<br>(IC-rated housing: SW - 1700lm max.<br>T-rated housing: SW - 1100lm max.) | UNV   |       |
| 120V (T-rated housing only)                                                               | 120   |       |
| 277V (T-rated housing only)                                                               | 277   |       |
| Control System & Dimming Level                                                            |       |       |
| 0-10V - 0% Dimming                                                                        | LZ1   |       |
| 0-10V - 1% Dimming                                                                        | L11   |       |
| 0-10V - 10% Dimming                                                                       | LD1   |       |
| Forward Phase (120V only)                                                                 | LFP   |       |
| Housing Type                                                                              |       |       |
| IC Rated / Airtight                                                                       | IC    |       |
| Thermally Protected, Non-IC                                                               | T     |       |
| Factory Options                                                                           |       |       |
| Bar Hangers                                                                               | BH    |       |
| Chicago Plenum                                                                            | CP    |       |

## Trim & LED Module

|                                                    |             |    |
|----------------------------------------------------|-------------|----|
| Aperture                                           |             |    |
| 3.5" Round Reflector                               | LC3         |    |
| 3.5" Round Airtight Reflector                      | LC3AT       |    |
| Trim Type: Round Trimless                          | —           | RT |
| Color Options: Standard White, 80 & 90 CRI         | —           | SW |
| Lumen Output<br>(Trim & housing output must match) |             |    |
| 700 Lumen                                          | 700L        |    |
| 900 Lumen                                          | 900L        |    |
| 1100 Lumen                                         | 1100L       |    |
| 1300 Lumen                                         | 1300L       |    |
| 1500 Lumen                                         | 1500L       |    |
| 1700 Lumen                                         | 1700L       |    |
| 1900 Lumen                                         | 1900L       |    |
| 2100 Lumen                                         | 2100L       |    |
| Color Temperature                                  |             |    |
| 2700K, 80+ CRI or 90+ CRI                          | 27K or 927K |    |
| 3000K, 80+ CRI                                     | 30K         |    |
| 3500K, 80+ CRI                                     | 35K         |    |
| Optic                                              |             |    |
| Tall Cone with 50° cut-off                         | WWT         |    |
| Short Cone with 60° cut-off                        | WWS         |    |
| Finish                                             |             |    |
| Clear Diffuse                                      | CD          |    |
| White                                              | WH          |    |



5 DAY: 200 pieces or less



5 DAY: 100 pieces or less

# 10+3.5" X 3.5"

## DOWNLIGHT & WALL WASH



\*3.5"x3.5" Downlights



# ID+ 3.5" x 3.5" DOWNLIGHT & WALL WASH



## Housing Ordering

| ID+ 3.5"x3.5" Downlight                                                                             | —           | FLC33D |
|-----------------------------------------------------------------------------------------------------|-------------|--------|
| Trim Type: Square Die-Cast Overlap                                                                  | —           | SDO    |
| Color Options: Standard White, 80 & 90 CRI                                                          | —           | SW     |
| <b>Lumen Output</b>                                                                                 |             |        |
| 700 Lumen (Not available with LFP)                                                                  | 700L        |        |
| 900 Lumen (Not available with LFP)                                                                  | 900L        |        |
| 1100 Lumen                                                                                          | 1100L       |        |
| 1300 Lumen                                                                                          | 1300L       |        |
| 1500 Lumen                                                                                          | 1500L       |        |
| 1700 Lumen                                                                                          | 1700L       |        |
| 1900 Lumen                                                                                          | 1900L       |        |
| 2100 Lumen                                                                                          | 2100L       |        |
| <b>Voltage</b>                                                                                      |             |        |
| 120/270 Volt<br>(IC-rated housing: SW - 1100lm max.<br>T-rated housing: SW - 1100lm max.)           | UNV         |        |
| 120V (T-rated housing only)                                                                         | 120         |        |
| 277V (T-rated housing only)                                                                         | 277         |        |
| <b>Control System &amp; Dimming Level</b>                                                           |             |        |
| 0-10V - 0% Dimming                                                                                  | LZ1         |        |
| 0-10V - 1% Dimming                                                                                  | L11         |        |
| 0-10V - 10% Dimming                                                                                 | LD1         |        |
| Forward Phase (120V only)                                                                           | LFP         |        |
| <b>Housing Type</b>                                                                                 |             |        |
| IC Rated / Airtight                                                                                 | IC          |        |
| Thermally Protected, Non-IC / Airtight                                                              | T           |        |
| <b>Factory Options</b>                                                                              |             |        |
| Bar Hangers                                                                                         | BH          |        |
| Chicago Plenum                                                                                      | CP          |        |
| Emergency Battery with Remote Test Switch<br>(T-rated housing only. Above ceiling access required.) | EMR         |        |
| <b>Trim &amp; LED Module</b>                                                                        |             |        |
| Aperture: 3.5" Square Reflector                                                                     | —           | LC33   |
| Trim Type: Square Die-Cast Overlap                                                                  | —           | SDO    |
| Color Options: Standard White, 80 & 90 CRI                                                          | —           | SW     |
| <b>Lumen Output</b><br>(Trim & housing output must match)                                           |             |        |
| 700 Lumen                                                                                           | 700L        |        |
| 900 Lumen                                                                                           | 900L        |        |
| 1100 Lumen                                                                                          | 1100L       |        |
| 1300 Lumen                                                                                          | 1300L       |        |
| 1500 Lumen                                                                                          | 1500L       |        |
| <b>Color Temperature</b>                                                                            |             |        |
| 2700K, 80+ CRI or 90+ CRI                                                                           | 27K or 927K |        |
| 3000K, 80+ CRI                                                                                      | 30K         |        |
| 3500K, 80+ CRI                                                                                      | 35K         |        |
| <b>Optic</b>                                                                                        |             |        |
| Tall Cone with 50° cut-off                                                                          | DNT         |        |
| Short Cone with 60° cut-off                                                                         | DNS         |        |
| <b>Distribution</b>                                                                                 |             |        |
| Narrow Flood                                                                                        | NFL         |        |
| Flood1                                                                                              | FL1         |        |
| Flood 2                                                                                             | FL2         |        |
| Wide Flood                                                                                          | WFL         |        |
| Very Wide Flood                                                                                     | VWFL        |        |
| <b>Finish</b>                                                                                       |             |        |
| Clear Diffuse                                                                                       | CD          |        |
| White                                                                                               | WH          |        |
| <b>Optional Flange Finish</b><br>(CD finish only. For matching finishes leave blank)                |             |        |
| White Painted                                                                                       | WP          |        |



**5 DAY:** 200 pieces or less



## Housing Ordering

| ID+ 3.5"x3.5" Wall Wash                                                                  | —           | FLC33W |
|------------------------------------------------------------------------------------------|-------------|--------|
| Trim Type: Square Die-Cast Overlap                                                       | —           | SDO    |
| Color Options: Standard White, 80 & 90 CRI                                               | —           | SW     |
| <b>Lumen Output</b>                                                                      |             |        |
| 700 Lumen                                                                                | 700L        |        |
| 900 Lumen                                                                                | 900L        |        |
| 1100 Lumen                                                                               | 1100L       |        |
| 1300 Lumen                                                                               | 1300L       |        |
| 1500 Lumen                                                                               | 1500L       |        |
| <b>Voltage</b>                                                                           |             |        |
| 120/270 Volt<br>(IC-rated housing: SW - 1100lm max.<br>T-rated housing: SW - 700lm max.) | UNV         |        |
| 120V (T-rated housing only)                                                              | 120         |        |
| 277V (T-rated housing only)                                                              | 277         |        |
| <b>Control System &amp; Dimming Level</b>                                                |             |        |
| 0-10V - 0% Dimming                                                                       | LZ1         |        |
| 0-10V - 1% Dimming                                                                       | L11         |        |
| 0-10V - 10% Dimming                                                                      | LD1         |        |
| Forward Phase (120V only)                                                                | LFP         |        |
| <b>Housing Type</b>                                                                      |             |        |
| IC Rated / Airtight                                                                      | IC          |        |
| Thermally Protected, Non-IC                                                              | T           |        |
| <b>Factory Options</b>                                                                   |             |        |
| Bar Hangers                                                                              | BH          |        |
| Chicago Plenum                                                                           | CP          |        |
| <b>Trim &amp; LED Module</b>                                                             |             |        |
| Aperture                                                                                 |             |        |
| 3.5" Square Reflector                                                                    | LC33        |        |
| 3.5" Square Airtight Reflector                                                           | LC33AT      |        |
| Trim Type: Square Die-Cast Overlap                                                       | —           | SDO    |
| Color Options: Standard White, 80 & 90 CRI                                               | —           | SW     |
| <b>Lumen Output</b><br>(Trim & housing output must match)                                |             |        |
| 700 Lumen                                                                                | 700L        |        |
| 900 Lumen                                                                                | 900L        |        |
| 1100 Lumen                                                                               | 1100L       |        |
| 1300 Lumen                                                                               | 1300L       |        |
| 1500 Lumen                                                                               | 1500L       |        |
| <b>Color Temperature</b>                                                                 |             |        |
| 2700K, 80+ CRI or 90+ CRI                                                                | 27K or 927K |        |
| 3000K, 80+ CRI                                                                           | 30K         |        |
| 3500K, 80+ CRI                                                                           | 35K         |        |
| <b>Optic</b>                                                                             |             |        |
| Tall Cone with 50° cut-off                                                               | WWT         |        |
| Short Cone with 60° cut-off                                                              | WWS         |        |
| <b>Finish</b>                                                                            |             |        |
| Clear Diffuse                                                                            | CD          |        |
| White                                                                                    | WH          |        |
| <b>Optional Flange Finish</b><br>(CD finish only. For matching finishes leave blank)     |             |        |
| White Painted                                                                            | WP          |        |



**5 DAY:** 100 pieces or less



# ID+ 3.5" X 3.5"

## TRIMLESS DOWNLIGHT & WALL WASH



\*3.5" x 3.5" Downlights

# ID+ 3.5" x 3.5" TRIMLESS DOWNLIGHT & WALL WASH



## Housing Ordering

| ID+ 3.5"x3.5" Downlight                                                                   | —     | FLC33D |
|-------------------------------------------------------------------------------------------|-------|--------|
| Trim Type: Square Die-Cast Trimless                                                       | —     | SDT    |
| Color Options: Standard White, 80 & 90 CRI                                                | —     | SW     |
| <b>Lumen Output</b>                                                                       |       |        |
| 700 Lumen (Not available with LFP)                                                        | 700L  |        |
| 900 Lumen (Not available with LFP)                                                        | 900L  |        |
| 1100 Lumen                                                                                | 1100L |        |
| 1300 Lumen                                                                                | 1300L |        |
| 1500 Lumen                                                                                | 1500L |        |
| 1700 Lumen                                                                                | 1700L |        |
| 1900 Lumen                                                                                | 1900L |        |
| 2100 Lumen                                                                                | 2100L |        |
| <b>Voltage</b>                                                                            |       |        |
| 120/270 Volt<br>(IC-rated housing: SW - 1700lm max.<br>T-rated housing: SW - 1100lm max.) | UNV   |        |
| 120V (T-rated housing only)                                                               | 120   |        |
| 277V (T-rated housing only)                                                               | 277   |        |
| <b>Control System &amp; Dimming Level</b>                                                 |       |        |
| 0-10V - 0% Dimming                                                                        | LZ1   |        |
| 0-10V - 1% Dimming                                                                        | L11   |        |
| 0-10V - 10% Dimming                                                                       | LD1   |        |
| Forward Phase (120V only)                                                                 | LFP   |        |
| <b>Housing Type</b>                                                                       |       |        |
| IC Rated / Airtight                                                                       | IC    |        |
| Thermally Protected, Non-IC / Airtight                                                    | T     |        |
| <b>Factory Options</b>                                                                    |       |        |
| Bar Hangers                                                                               | BH    |        |
| Chicago Plenum                                                                            | CP    |        |

## Trim & LED Module

|                                                           |             |      |
|-----------------------------------------------------------|-------------|------|
| <b>Aperture: 3.5" Square Reflector</b>                    | —           | LC33 |
| Trim Type: Square Die-Cast Trimless                       | —           | SDT  |
| Color Options: Standard White, 80 & 90 CRI                | —           | SW   |
| <b>Lumen Output</b><br>(Trim & housing output must match) |             |      |
| 700 Lumen                                                 | 700L        |      |
| 900 Lumen                                                 | 900L        |      |
| 1100 Lumen                                                | 1100L       |      |
| 1300 Lumen                                                | 1300L       |      |
| 1500 Lumen                                                | 1500L       |      |
| 1700 Lumen                                                | 1700L       |      |
| 1900 Lumen                                                | 1900L       |      |
| 2100 Lumen                                                | 2100L       |      |
| <b>Color Temperature</b>                                  |             |      |
| 2700K, 80+ CRI or 90+ CRI                                 | 27K or 927K |      |
| 3000K, 80+ CRI                                            | 30K         |      |
| 3500K, 80+ CRI                                            | 35K         |      |
| <b>Optic</b>                                              |             |      |
| Tall Cone with 50° cut-off                                | DNT         |      |
| Short Cone with 60° cut-off                               | DNS         |      |
| <b>Distribution</b>                                       |             |      |
| Narrow Flood                                              | NFL         |      |
| Flood1                                                    | FL1         |      |
| Flood 2                                                   | FL2         |      |
| Wide Flood                                                | WFL         |      |
| Very Wide Flood                                           | VWFL        |      |
| <b>Finish</b>                                             |             |      |
| Clear Diffuse                                             | CD          |      |
| White                                                     | WH          |      |

**QS QUICKSHIP TERMS**

**5 DAY:** 200 pieces or less



## Housing Ordering

| ID+ 3.5"x3.5" Wall Wash                                                                  | —     | FLC33W |
|------------------------------------------------------------------------------------------|-------|--------|
| Trim Type: Square Die-Cast Trimless                                                      | —     | SDT    |
| Color Options: Standard White, 80 & 90 CRI                                               | —     | SW     |
| <b>Lumen Output</b>                                                                      |       |        |
| 700 Lumen                                                                                | 700L  |        |
| 900 Lumen                                                                                | 900L  |        |
| 1100 Lumen                                                                               | 1100L |        |
| 1300 Lumen                                                                               | 1300L |        |
| 1500 Lumen                                                                               | 1500L |        |
| <b>Voltage</b>                                                                           |       |        |
| 120/270 Volt<br>(IC-rated housing: SW - 1700lm max.<br>T-rated housing: SW - 700lm max.) | UNV   |        |
| 120V (T-rated housing only)                                                              | 120   |        |
| 277V (T-rated housing only)                                                              | 277   |        |
| <b>Control System &amp; Dimming Level</b>                                                |       |        |
| 0-10V - 0% Dimming                                                                       | LZ1   |        |
| 0-10V - 1% Dimming                                                                       | L11   |        |
| 0-10V - 10% Dimming                                                                      | LD1   |        |
| Forward Phase (120V only)                                                                | LFP   |        |
| <b>Housing Type</b>                                                                      |       |        |
| IC Rated / Airtight                                                                      | IC    |        |
| Thermally Protected, Non-IC                                                              | T     |        |
| <b>Factory Options</b>                                                                   |       |        |
| Bar Hangers                                                                              | BH    |        |
| Chicago Plenum                                                                           | CP    |        |

## Trim & LED Module

|                                                           |             |     |
|-----------------------------------------------------------|-------------|-----|
| <b>Aperture</b>                                           |             |     |
| 3.5" Square Reflector                                     | LC33        |     |
| 3.5" Square Airtight Reflector                            | LC33AT      |     |
| Trim Type: Square Die-Cast Trimless                       | —           | SDT |
| Color Options: Standard White, 80 & 90 CRI                | —           | SW  |
| <b>Lumen Output</b><br>(Trim & housing output must match) |             |     |
| 700 Lumen                                                 | 700L        |     |
| 900 Lumen                                                 | 900L        |     |
| 1100 Lumen                                                | 1100L       |     |
| 1300 Lumen                                                | 1300L       |     |
| 1500 Lumen                                                | 1500L       |     |
| <b>Color Temperature</b>                                  |             |     |
| 2700K, 80+ CRI or 90+ CRI                                 | 27K or 927K |     |
| 3000K, 80+ CRI                                            | 30K         |     |
| 3500K, 80+ CRI                                            | 35K         |     |
| <b>Optic</b>                                              |             |     |
| Tall Cone with 50° cut-off                                | WWT         |     |
| Short Cone with 60° cut-off                               | WWS         |     |
| <b>Finish</b>                                             |             |     |
| Clear Diffuse                                             | CD          |     |
| White                                                     | WH          |     |

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less



# ID + 4.5"

## DOWNLIGHT & WALL WASH



\*4.5" Downlights

# ID+ 4.5" DOWNLIGHT & WALL WASH



|                                                                                      |             |              |
|--------------------------------------------------------------------------------------|-------------|--------------|
| <b>ID+ 4.5" Downlight</b>                                                            | —           | <b>FLC4D</b> |
| <b>Trim Type: Round Overlap</b>                                                      | —           | <b>RO</b>    |
| <b>Color Options: Standard White, 80 &amp; 90 CRI</b>                                | —           | <b>SW</b>    |
| <b>Lumen Output</b>                                                                  |             |              |
| 1000 Lumens                                                                          | 1000L       |              |
| 1500 Lumens                                                                          | 1500L       |              |
| 2000 Lumens                                                                          | 2000L       |              |
| 2500 Lumens                                                                          | 2500L       |              |
| 3000 Lumens                                                                          | 3000L       |              |
| (Not available with SP distribution or LFP.)                                         |             |              |
| <b>Voltage</b>                                                                       |             |              |
| UNV 120V/277V                                                                        | UNV         |              |
| (IC housing only. Not available with LFP. See Housing Type for output restrictions.) |             |              |
| 120V                                                                                 | 120         |              |
| 277V                                                                                 | 277         |              |
| <b>Control System &amp; Dimming Level</b>                                            |             |              |
| 0-10V - 0% Dimming                                                                   | LZ1         |              |
| 0-10V - 1% Dimming                                                                   | L11         |              |
| 0-10V - 10% Dimming                                                                  | LD1         |              |
| Forward Phase (120V only)                                                            | LFP         |              |
| <b>Housing Type</b>                                                                  |             |              |
| IC Rated / Airtight                                                                  | IC          |              |
| (L11 & LD1 2000L max. LZ1 & LFP 1500L max. LC4AT required for Airtight.)             |             |              |
| Thermally Protected                                                                  | T           |              |
| <b>Factory Options</b>                                                               |             |              |
| Bar Hangers                                                                          | BH          |              |
| Chicago Plenum / National Plenum                                                     | CP          |              |
| Emergency Battery                                                                    | EM          |              |
| (Must order LC4EM trim. Not wet location or outdoor rated.)                          |             |              |
| <b>Aperture</b>                                                                      |             |              |
| 4.5" Round Reflector                                                                 | LC4         |              |
| 4.5" Round Reflector - Airtight                                                      | LC4AT       |              |
| (IC housing required for Airtight rating.)                                           |             |              |
| 4.5" Round Reflector - Emergency                                                     | LC4EM       |              |
| (Required for "EM" option. DN optic only. Not wet location or outdoor rated.)        |             |              |
| <b>Trim Type: Round</b>                                                              | —           | <b>RO</b>    |
| <b>Lumen Output</b>                                                                  |             |              |
| (Trim & housing output must match)                                                   |             |              |
| 1000 Lumens                                                                          | 1000L       |              |
| 1500 Lumens                                                                          | 1500L       |              |
| 2000 Lumens                                                                          | 2000L       |              |
| 2500 Lumens                                                                          | 2500L       |              |
| 3000 Lumens                                                                          | 3000L       |              |
| (Not available with SP distribution.)                                                |             |              |
| <b>Color Temperature</b>                                                             |             |              |
| 3000K, 80+ CRI                                                                       | 30K         |              |
| 3500K, 80+ CRI or 90+ CRI                                                            | 35K or 935K |              |
| 4000K, 80+ CRI                                                                       | 40K         |              |
| <b>Optic: Downlight with 50° cut-off</b>                                             | —           | <b>DN</b>    |
| <b>Distribution</b>                                                                  |             |              |
| Spot                                                                                 | SP          |              |
| Narrow Flood                                                                         | NFL         |              |
| Flood 1                                                                              | FL1         |              |
| Flood 2                                                                              | FL2         |              |
| Wide Flood                                                                           | WFL         |              |
| <b>Reflector Color</b>                                                               |             |              |
| Clear Diffuse                                                                        | CD          |              |
| White (White Painted flange only)                                                    | WH          |              |
| <b>Flange Finish</b>                                                                 |             |              |
| Non-Painted (Clear Diffuse only)                                                     | NP          |              |
| White Painted                                                                        | WP          |              |



|                                                                                      |             |              |
|--------------------------------------------------------------------------------------|-------------|--------------|
| <b>ID+ 4.5" Downlight</b>                                                            | —           | <b>FLC4W</b> |
| <b>Trim Type: Round Overlap</b>                                                      | —           | <b>RO</b>    |
| <b>Color Options: Standard White, 80 &amp; 90 CRI</b>                                | —           | <b>SW</b>    |
| <b>Lumen Output</b>                                                                  |             |              |
| 1000 Lumens                                                                          | 1000L       |              |
| 1500 Lumens                                                                          | 1500L       |              |
| 2000 Lumens                                                                          | 2000L       |              |
| 2500 Lumens                                                                          | 2500L       |              |
| 3000 Lumens                                                                          | 3000L       |              |
| (Not available with LFP.)                                                            |             |              |
| <b>Voltage</b>                                                                       |             |              |
| UNV 120V/277V                                                                        | UNV         |              |
| (IC housing only. Not available with LFP. See Housing Type for output restrictions.) |             |              |
| 120V                                                                                 | 120         |              |
| 277V                                                                                 | 277         |              |
| <b>Control System &amp; Dimming Level</b>                                            |             |              |
| 0-10V - 0% Dimming                                                                   | LZ1         |              |
| 0-10V - 1% Dimming                                                                   | L11         |              |
| 0-10V - 10% Dimming                                                                  | LD1         |              |
| Forward Phase (120V only)                                                            | LFP         |              |
| <b>Housing Type</b>                                                                  |             |              |
| IC Rated / Airtight                                                                  | IC          |              |
| (L11 & LD1 2000L max. LZ1 & LFP 1500L max. LC4AT required for Airtight.)             |             |              |
| Thermally Protected                                                                  | T           |              |
| <b>Factory Options</b>                                                               |             |              |
| Bar Hangers                                                                          | BH          |              |
| Chicago Plenum / National Plenum                                                     | CP          |              |
| <b>Aperture</b>                                                                      |             |              |
| 4.5" Round Reflector                                                                 | LC4         |              |
| 4.5" Round Reflector - Airtight                                                      | LC4AT       |              |
| (IC housing required for Airtight rating.)                                           |             |              |
| <b>Trim Type: Round</b>                                                              | —           | <b>RO</b>    |
| <b>Lumen Output</b>                                                                  |             |              |
| (Trim & housing output must match)                                                   |             |              |
| 1000 Lumens                                                                          | 1000L       |              |
| 1500 Lumens                                                                          | 1500L       |              |
| 2000 Lumens                                                                          | 2000L       |              |
| 2500 Lumens                                                                          | 2500L       |              |
| 3000 Lumens                                                                          | 3000L       |              |
| <b>Color Temperature</b>                                                             |             |              |
| 3000K, 80+ CRI                                                                       | 30K         |              |
| 3500K, 80+ CRI or 90+ CRI                                                            | 35K or 935K |              |
| 4000K, 80+ CRI                                                                       | 40K         |              |
| <b>Optic: Wall Wash</b>                                                              |             | <b>WW</b>    |
| <b>Reflector Color</b>                                                               |             |              |
| Clear Diffuse                                                                        | CD          |              |
| White (White Painted flange only)                                                    | WH          |              |
| <b>Flange Finish</b>                                                                 |             |              |
| Non-Painted (Clear Diffuse only)                                                     | NP          |              |
| White Painted                                                                        | WP          |              |

**QS QUICKSHIP TERMS**  
5 DAY: 100 pieces or less

**QS QUICKSHIP TERMS**  
5 DAY: 200 pieces or less



# ID+ 4.5"


## TRIMLESS DOWNLIGHT & WALL WASH



\*4.5" Downlights



# ID+ 4.5" TRIMLESS DOWNLIGHT & WALL WASH

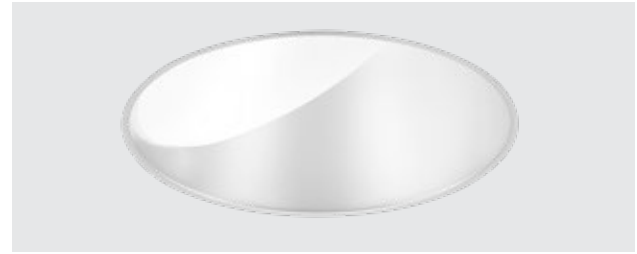

|                                                                                      |             |              |
|--------------------------------------------------------------------------------------|-------------|--------------|
| <b>ID+ 4.5" Trimless Downlight</b>                                                   | —           | <b>FLC4D</b> |
| <b>Trim Type: Round Trimless</b>                                                     | —           | <b>RT</b>    |
| <b>Color Options: Standard White, 80 &amp; 90 CRI</b>                                | —           | <b>SW</b>    |
| <b>Lumen Output</b>                                                                  |             |              |
| 1000 Lumens                                                                          | 1000L       |              |
| 1500 Lumens                                                                          | 1500L       |              |
| 2000 Lumens                                                                          | 2000L       |              |
| 2500 Lumens                                                                          | 2500L       |              |
| 3000 Lumens                                                                          | 3000L       |              |
| (Not available with SP distribution or LFP.)                                         |             |              |
| <b>Voltage</b>                                                                       |             |              |
| UNV 120V/277V                                                                        | UNV         |              |
| (IC housing only. Not available with LFP. See Housing Type for output restrictions.) |             |              |
| 120V                                                                                 | 120         |              |
| 277V                                                                                 | 277         |              |
| <b>Control System &amp; Dimming Level</b>                                            |             |              |
| 0-10V - 0% Dimming                                                                   | LZ1         |              |
| 0-10V - 1% Dimming                                                                   | L11         |              |
| 0-10V - 10% Dimming                                                                  | LD1         |              |
| Forward Phase (120V only)                                                            | LFP         |              |
| <b>Housing Type</b>                                                                  |             |              |
| IC Rated / Airtight                                                                  | IC          |              |
| (L11 & LD1 2000L max. LZ1 & LFP 1500L max. LC4AT required for Airtight.)             |             |              |
| Thermally Protected                                                                  | T           |              |
| <b>Factory Options</b>                                                               |             |              |
| Bar Hangers                                                                          | BH          |              |
| Chicago Plenum / National Plenum                                                     | CP          |              |
| Emergency Battery                                                                    | EM          |              |
| (Must order LC4EM trim. Not wet location or outdoor rated.)                          |             |              |
| <b>Aperture</b>                                                                      |             |              |
| 4.5" Round Reflector                                                                 | LC4         |              |
| 4.5" Round Reflector - Airtight                                                      | LC4AT       |              |
| (IC housing required for Airtight rating)                                            |             |              |
| 4.5" Round Reflector - Emergency                                                     | LC4EM       |              |
| (Required for "EM" option. DN optic only. Not wet location or outdoor rated.)        |             |              |
| <b>Trim Type: Round Trimless</b>                                                     | —           | <b>RT</b>    |
| <b>Lumen Output</b>                                                                  |             |              |
| (Trim & housing output must match)                                                   |             |              |
| 1000 Lumens                                                                          | 1000L       |              |
| 1500 Lumens                                                                          | 1500L       |              |
| 2000 Lumens                                                                          | 2000L       |              |
| 2500 Lumens                                                                          | 2500L       |              |
| 3000 Lumens                                                                          | 3000L       |              |
| (Not available with SP distribution.)                                                |             |              |
| <b>Color Temperature</b>                                                             |             |              |
| 3000K, 80+ CRI                                                                       | 30K         |              |
| 3500K, 80+ CRI or 90+ CRI                                                            | 35K or 935K |              |
| 4000K, 80+ CRI                                                                       | 40K         |              |
| <b>Optic: Downlight with 50° cut-off</b>                                             | —           | <b>DN</b>    |
| <b>Distribution</b>                                                                  |             |              |
| Spot                                                                                 | SP          |              |
| Narrow Flood                                                                         | NFL         |              |
| Flood 1                                                                              | FL1         |              |
| Flood 2                                                                              | FL2         |              |
| Wide Flood                                                                           | WFL         |              |
| <b>Reflector Color</b>                                                               |             |              |
| Clear Diffuse                                                                        | CD          |              |
| White                                                                                | WH          |              |

|                                                                                      |             |              |
|--------------------------------------------------------------------------------------|-------------|--------------|
| <b>ID+ 4.5" Trimless Wall Wash</b>                                                   | —           | <b>FLC4W</b> |
| <b>Trim Type: Round Trimless</b>                                                     | —           | <b>RT</b>    |
| <b>Color Options: Standard White, 80 &amp; 90 CRI</b>                                | —           | <b>SW</b>    |
| <b>Lumen Output</b>                                                                  |             |              |
| 1000 Lumens                                                                          | 1000L       |              |
| 1500 Lumens                                                                          | 1500L       |              |
| 2000 Lumens                                                                          | 2000L       |              |
| 2500 Lumens                                                                          | 2500L       |              |
| 3000 Lumens                                                                          | 3000L       |              |
| (Not available with LFP.)                                                            |             |              |
| <b>Voltage</b>                                                                       |             |              |
| UNV 120V/277V                                                                        | UNV         |              |
| (IC housing only. Not available with LFP. See Housing Type for output restrictions.) |             |              |
| 120V                                                                                 | 120         |              |
| 277V                                                                                 | 277         |              |
| <b>Control System &amp; Dimming Level</b>                                            |             |              |
| 0-10V - 0% Dimming                                                                   | LZ1         |              |
| 0-10V - 1% Dimming                                                                   | L11         |              |
| 0-10V - 10% Dimming                                                                  | LD1         |              |
| Forward Phase (120V only)                                                            | LFP         |              |
| <b>Housing Type</b>                                                                  |             |              |
| IC Rated / Airtight                                                                  | IC          |              |
| (L11 & LD1 2000L max. LZ1 & LFP 1500L max. LC4AT required for Airtight.)             |             |              |
| Thermally Protected                                                                  | T           |              |
| <b>Factory Options</b>                                                               |             |              |
| Bar Hangers                                                                          | BH          |              |
| Chicago Plenum / National Plenum                                                     | CP          |              |
| <b>Aperture</b>                                                                      |             |              |
| 4.5" Round Reflector                                                                 | LC4         |              |
| 4.5" Round Reflector - Airtight                                                      | LC4AT       |              |
| (IC housing required for Airtight rating)                                            |             |              |
| <b>Trim Type: Round Trimless</b>                                                     | —           | <b>RT</b>    |
| <b>Lumen Output</b>                                                                  |             |              |
| (Trim & housing output must match)                                                   |             |              |
| 1000 Lumens                                                                          | 1000L       |              |
| 1500 Lumens                                                                          | 1500L       |              |
| 2000 Lumens                                                                          | 2000L       |              |
| 2500 Lumens                                                                          | 2500L       |              |
| 3000 Lumens                                                                          | 3000L       |              |
| <b>Color Temperature</b>                                                             |             |              |
| 3000K, 80+ CRI                                                                       | 30K         |              |
| 3500K, 80+ CRI or 90+ CRI                                                            | 35K or 935K |              |
| 4000K, 80+ CRI                                                                       | 40K         |              |
| <b>Optic: Wall Wash</b>                                                              |             | <b>WW</b>    |
| <b>Reflector Color</b>                                                               |             |              |
| Clear Diffuse                                                                        | CD          |              |
| White                                                                                | WH          |              |

**QS QUICKSHIP TERMS**  
5 DAY: 100 pieces or less

**QS QUICKSHIP TERMS**  
5 DAY: 200 pieces or less

# ID+ 4.5" X 4.5"

## DOWNLIGHT & WALL WASH



\*4.5" x 4.5" Downlights

# ID+ 4.5" x 4.5" DOWNLIGHT & WALL WASH



| ID+ 4.5" x 4.5" Downlight                                                            | —           | FLC44D     |
|--------------------------------------------------------------------------------------|-------------|------------|
| <b>Trim Type: Square Overlap</b>                                                     | —           | <b>SO</b>  |
| <b>Color Options: Standard White, 80 &amp; 90 CRI</b>                                | —           | <b>SW</b>  |
| <b>Lumen Output</b>                                                                  |             |            |
| 1000 Lumens                                                                          | 1000L       |            |
| 1500 Lumens                                                                          | 1500L       |            |
| 2000 Lumens                                                                          | 2000L       |            |
| 2500 Lumens                                                                          | 2500L       |            |
| 3000 Lumens                                                                          | 3000L       |            |
| (Not available with SP distribution or LFP.)                                         |             |            |
| <b>Voltage</b>                                                                       |             |            |
| UNV 120V/277V                                                                        | UNV         |            |
| (IC housing only. Not available with LFP. See Housing Type for output restrictions.) |             |            |
| 120V                                                                                 | 120         |            |
| 277V                                                                                 | 277         |            |
| <b>Control System &amp; Dimming Level</b>                                            |             |            |
| 0-10V - 0% Dimming                                                                   | LZ1         |            |
| 0-10V - 1% Dimming                                                                   | L11         |            |
| 0-10V - 10% Dimming                                                                  | LD1         |            |
| Forward Phase (120V only)                                                            | LFP         |            |
| <b>Housing Type</b>                                                                  |             |            |
| IC Rated / Airtight                                                                  | IC          |            |
| (L11 & LD1 2000L max. LZ1 & LFP 1500L max. LC44AT required for Airtight.)            |             |            |
| Thermally Protected                                                                  | T           |            |
| <b>Factory Options</b>                                                               |             |            |
| Bar Hangers                                                                          | BH          |            |
| Chicago Plenum / National Plenum                                                     | CP          |            |
| Emergency Battery                                                                    | EM          |            |
| (Must order LC44EM trim. Not wet location or outdoor rated.)                         |             |            |
| <b>Aperture</b>                                                                      |             |            |
| 4.5" Square Reflector                                                                | LC44        |            |
| 4.5" Square Reflector - Airtight                                                     | LC44AT      |            |
| (IC housing required for Airtight rating)                                            |             |            |
| 4.5" Square Reflector - Emergency                                                    | LC4EM       |            |
| (Required for "EM" option. DN optic only. Not wet location or outdoor rated.)        |             |            |
| <b>Trim Type: Square Die-Cast Overlap</b>                                            | —           | <b>SDO</b> |
| <b>Lumen Output</b>                                                                  |             |            |
| (Trim & housing output must match)                                                   |             |            |
| 1000 Lumens                                                                          | 1000L       |            |
| 1500 Lumens                                                                          | 1500L       |            |
| 2000 Lumens                                                                          | 2000L       |            |
| 2500 Lumens                                                                          | 2500L       |            |
| 3000 Lumens                                                                          | 3000L       |            |
| (Not available with SP distribution.)                                                |             |            |
| <b>Color Temperature</b>                                                             |             |            |
| 3000K, 80+ CRI                                                                       | 30K         |            |
| 3500K, 80+ CRI or 90+ CRI                                                            | 35K or 935K |            |
| 4000K, 80+ CRI                                                                       | 40K         |            |
| —                                                                                    | —           |            |
| <b>Optic: Downlight with 50° cut-off</b>                                             |             | <b>DN</b>  |
| <b>Distribution</b>                                                                  |             |            |
| Spot                                                                                 | SP          |            |
| Narrow Flood                                                                         | NFL         |            |
| Flood 1                                                                              | FL1         |            |
| Flood 2                                                                              | FL2         |            |
| Wide Flood                                                                           | WFL         |            |
| Very Wide Flood                                                                      | VWFL        |            |
| <b>Reflector Color</b>                                                               |             |            |
| Clear Diffuse                                                                        | CD          |            |
| White (White Painted flange only)                                                    | WH          |            |
| <b>Flange Finish</b>                                                                 |             |            |
| Non-Painted (Clear Diffuse only)                                                     | NP          |            |
| White Painted                                                                        | WP          |            |



| ID+ 4.5" x 4.5" Wall Wash                                                            | —           | FLC44W     |
|--------------------------------------------------------------------------------------|-------------|------------|
| <b>Trim Type: Square Overlap</b>                                                     | —           | <b>SO</b>  |
| <b>Color Options: Standard White, 80 &amp; 90 CRI</b>                                | —           | <b>SW</b>  |
| <b>Lumen Output</b>                                                                  |             |            |
| 1000 Lumens                                                                          | 1000L       |            |
| 1500 Lumens                                                                          | 1500L       |            |
| 2000 Lumens                                                                          | 2000L       |            |
| (Not available with LFP.)                                                            |             |            |
| <b>Voltage</b>                                                                       |             |            |
| UNV 120V/277V                                                                        | UNV         |            |
| (IC housing only. Not available with LFP. See Housing Type for output restrictions.) |             |            |
| 120V                                                                                 | 120         |            |
| 277V                                                                                 | 277         |            |
| <b>Control System &amp; Dimming Level</b>                                            |             |            |
| 0-10V - 0% Dimming                                                                   | LZ1         |            |
| 0-10V - 1% Dimming                                                                   | L11         |            |
| 0-10V - 10% Dimming                                                                  | LD1         |            |
| Forward Phase (120V only)                                                            | LFP         |            |
| <b>Housing Type</b>                                                                  |             |            |
| IC Rated / Airtight                                                                  | IC          |            |
| (L11 & LD1 1500L max. LZ1 & LFP 1000L max. LC44AT required for Airtight.)            |             |            |
| Thermally Protected                                                                  | T           |            |
| <b>Factory Options</b>                                                               |             |            |
| Bar Hangers                                                                          | BH          |            |
| Chicago Plenum / National Plenum                                                     | CP          |            |
| <b>Aperture</b>                                                                      |             |            |
| 4.5" Square Reflector                                                                | LC44        |            |
| 4.5" Square Reflector - Airtight                                                     | LC44AT      |            |
| (IC housing required for Airtight rating)                                            |             |            |
| <b>Trim Type: Square Die-Cast Overlap</b>                                            | —           | <b>SDO</b> |
| <b>Lumen Output</b>                                                                  |             |            |
| (Trim & housing output must match)                                                   |             |            |
| 1000 Lumens                                                                          | 1000L       |            |
| 1500 Lumens                                                                          | 1500L       |            |
| 2000 Lumens                                                                          | 2000L       |            |
| <b>Color Temperature</b>                                                             |             |            |
| 3000K, 80+ CRI                                                                       | 30K         |            |
| 3500K, 80+ CRI or 90+ CRI                                                            | 35K or 935K |            |
| 4000K, 80+ CRI                                                                       | 40K         |            |
| —                                                                                    | —           |            |
| <b>Optic: Wall Wash</b>                                                              |             | <b>WW</b>  |
| <b>Reflector Color</b>                                                               |             |            |
| Clear Diffuse                                                                        | CD          |            |
| White (White Painted flange only)                                                    | WH          |            |
| <b>Flange Finish</b>                                                                 |             |            |
| Non-Painted (Clear Diffuse only)                                                     | NP          |            |
| White Painted                                                                        | WP          |            |

**QS QUICKSHIP TERMS**  
5 DAY: 200 pieces or less

**QS QUICKSHIP TERMS**  
5 DAY: 100 pieces or less



# 10' x 4.5" x 4.5"

TRIMLESS DOWNLIGHT & WALL WASH



10' x 4.5" x 4.5" Downlights

# ID+ 4.5" x 4.5" TRIMLESS DOWNLIGHT & WALL WASH



| ID+ 4.5" x 4.5" Downlight                                                            | —           | FLC44D     |
|--------------------------------------------------------------------------------------|-------------|------------|
| <b>Trim Type: Square Trimless</b>                                                    | —           | <b>ST</b>  |
| <b>Color Options: Standard White, 80 &amp; 90 CRI</b>                                | —           | <b>SW</b>  |
| <b>Lumen Output</b>                                                                  |             |            |
| 1000 Lumens                                                                          | 1000L       |            |
| 1500 Lumens                                                                          | 1500L       |            |
| 2000 Lumens                                                                          | 2000L       |            |
| 2500 Lumens                                                                          | 2500L       |            |
| 3000 Lumens                                                                          | 3000L       |            |
| (Not available with SP distribution or LFP.)                                         |             |            |
| <b>Voltage</b>                                                                       |             |            |
| UNV 120V/277V                                                                        | UNV         |            |
| (IC housing only. Not available with LFP. See Housing Type for output restrictions.) |             |            |
| 120V                                                                                 | 120         |            |
| 277V                                                                                 | 277         |            |
| <b>Control System &amp; Dimming Level</b>                                            |             |            |
| 0-10V - 0% Dimming                                                                   | LZ1         |            |
| 0-10V - 1% Dimming                                                                   | L11         |            |
| 0-10V - 10% Dimming                                                                  | LD1         |            |
| Forward Phase (120V only)                                                            | LFP         |            |
| <b>Housing Type</b>                                                                  |             |            |
| IC Rated / Airtight                                                                  | IC          |            |
| (L11 & LD1 2000L max. LZ1 & LFP 1500L max. LC44AT required for Airtight.)            |             |            |
| Thermally Protected                                                                  | T           |            |
| <b>Factory Options</b>                                                               |             |            |
| Bar Hangers                                                                          | BH          |            |
| Chicago Plenum / National Plenum                                                     | CP          |            |
| Emergency Battery                                                                    | EM          |            |
| (Must order LC44EM trim. Not wet location or outdoor rated.)                         |             |            |
| <b>Aperture</b>                                                                      |             |            |
| 4.5" Square Reflector                                                                | LC44        |            |
| 4.5" Square Reflector - Airtight                                                     | LC44AT      |            |
| (IC housing required for Airtight rating)                                            |             |            |
| 4.5" Square Reflector - Emergency                                                    | LC4EM       |            |
| (Required for "EM" option. DN optic only. Not wet location or outdoor rated.)        |             |            |
| <b>Trim Type: Square Die-Cast Trimless</b>                                           | —           | <b>SDT</b> |
| <b>Lumen Output</b>                                                                  |             |            |
| (Trim & housing output must match)                                                   |             |            |
| 1000 Lumens                                                                          | 1000L       |            |
| 1500 Lumens                                                                          | 1500L       |            |
| 2000 Lumens                                                                          | 2000L       |            |
| 2500 Lumens                                                                          | 2500L       |            |
| 3000 Lumens                                                                          | 3000L       |            |
| (Not available with SP distribution.)                                                |             |            |
| <b>Color Temperature</b>                                                             |             |            |
| 3000K, 80+ CRI                                                                       | 30K         |            |
| 3500K, 80+ CRI or 90+ CRI                                                            | 35K or 935K |            |
| 4000K, 80+ CRI                                                                       | 40K         |            |
| <b>Optic: Downlight with 50° cut-off</b>                                             | —           | <b>DN</b>  |
| <b>Distribution</b>                                                                  |             |            |
| Spot                                                                                 | SP          |            |
| Narrow Flood                                                                         | NFL         |            |
| Flood 1                                                                              | FL1         |            |
| Flood 2                                                                              | FL2         |            |
| Wide Flood                                                                           | WFL         |            |
| Very Wide Flood                                                                      | VWFL        |            |
| <b>Reflector Color</b>                                                               |             |            |
| Clear Diffuse                                                                        | CD          |            |
| White                                                                                | WH          |            |



| ID+ 4.5" x 4.5" Wall Wash                                                            | —           | FLC44W     |
|--------------------------------------------------------------------------------------|-------------|------------|
| <b>Trim Type: Square Trimless</b>                                                    | —           | <b>ST</b>  |
| <b>Color Options: Standard White, 80 &amp; 90 CRI</b>                                | —           | <b>SW</b>  |
| <b>Lumen Output</b>                                                                  |             |            |
| 1000 Lumens                                                                          | 1000L       |            |
| 1500 Lumens                                                                          | 1500L       |            |
| 2000 Lumens                                                                          | 2000L       |            |
| 2500 Lumens                                                                          | 2500L       |            |
| (Not available with LFP.)                                                            |             |            |
| <b>Voltage</b>                                                                       |             |            |
| UNV 120V/277V                                                                        | UNV         |            |
| (IC housing only. Not available with LFP. See Housing Type for output restrictions.) |             |            |
| 120V                                                                                 | 120         |            |
| 277V                                                                                 | 277         |            |
| <b>Control System &amp; Dimming Level</b>                                            |             |            |
| 0-10V - 0% Dimming                                                                   | LZ1         |            |
| 0-10V - 1% Dimming                                                                   | L11         |            |
| 0-10V - 10% Dimming                                                                  | LD1         |            |
| Forward Phase (120V only)                                                            | LFP         |            |
| <b>Housing Type</b>                                                                  |             |            |
| IC Rated / Airtight                                                                  | IC          |            |
| (L11 & LD1 1500L max. LZ1 & LFP 1000L max. LC44AT required for Airtight.)            |             |            |
| Thermally Protected                                                                  | T           |            |
| <b>Factory Options</b>                                                               |             |            |
| Bar Hangers                                                                          | BH          |            |
| Chicago Plenum / National Plenum                                                     | CP          |            |
| <b>Aperture</b>                                                                      |             |            |
| 4.5" Square Reflector                                                                | LC44        |            |
| 4.5" Square Reflector - Airtight                                                     | LC44AT      |            |
| (IC housing required for Airtight rating)                                            |             |            |
| <b>Trim Type: Square Die-Cast Trimless</b>                                           | —           | <b>SDT</b> |
| <b>Lumen Output</b>                                                                  |             |            |
| (Trim & housing output must match)                                                   |             |            |
| 1000 Lumens                                                                          | 1000L       |            |
| 1500 Lumens                                                                          | 1500L       |            |
| 2000 Lumens                                                                          | 2000L       |            |
| <b>Color Temperature</b>                                                             |             |            |
| 3000K, 80+ CRI                                                                       | 30K         |            |
| 3500K, 80+ CRI or 90+ CRI                                                            | 35K or 935K |            |
| 4000K, 80+ CRI                                                                       | 40K         |            |
| <b>Optic: Wall Wash</b>                                                              | —           | <b>WW</b>  |
| <b>Reflector Color</b>                                                               |             |            |
| Clear Diffuse                                                                        | CD          |            |
| White                                                                                | WH          |            |

**QS QUICKSHIP TERMS**  
5 DAY: 100 pieces or less

**QS QUICKSHIP TERMS**  
5 DAY: 200 pieces or less



# ID + 3.5"

## CYLINDERS



\*Surface Mount Only



# ID+ 3.5" CYLINDERS



| ID+ 3.5" Round Cylinder Pendant                                                           | —                  | FLCY3     |
|-------------------------------------------------------------------------------------------|--------------------|-----------|
| <b>Trim Type: Round</b>                                                                   | —                  | <b>RD</b> |
| <b>Decorative Reveal</b>                                                                  |                    |           |
| White Non-Glow Reveal                                                                     | WHR                |           |
| Black Non-Glow Reveal                                                                     | BKR                |           |
| White Glowing Reveal                                                                      | WHG                |           |
| <b>Lumen Output</b>                                                                       |                    |           |
| 700 Lumens                                                                                | 700L               |           |
| 1000 Lumens                                                                               | 1000L              |           |
| 1500 Lumens                                                                               | 1500L              |           |
| 1700 Lumens                                                                               | 1700L              |           |
| 2000 Lumens<br>(Power Canopy only)                                                        | 2000L              |           |
| <b>Color Temperature</b>                                                                  |                    |           |
| 3000K, 80+ CRI                                                                            | 30K                |           |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                          | 35K <b>or</b> 935K |           |
| 4000K, 80+ CRI                                                                            | 40K                |           |
| <b>Single Circuit</b>                                                                     | —                  | <b>1C</b> |
| <b>Voltage</b>                                                                            |                    |           |
| 120/277 UNV                                                                               | UNV                |           |
| 120 Volt                                                                                  | 120                |           |
| 277 Volt                                                                                  | 277                |           |
| <b>Canopy Configuration</b>                                                               |                    |           |
| Shallow Canopy, Integral Driver<br>(LT1 & LFP only)                                       | SC                 |           |
| Power Canopy                                                                              | PC                 |           |
| <b>Dimming Level</b>                                                                      |                    |           |
| 0-10V - 0% Dimming                                                                        | LZ1                |           |
| 0-10V - 1% Dimming                                                                        | L11                |           |
| Forward Phase - 1% Dimming<br>(Shallow Canopy, Integral Driver, 120V only)                | LFP                |           |
| <b>Mounting</b>                                                                           |                    |           |
| 72" Cable, Straight Feed (Cut in field)                                                   | C72                |           |
| 144" Cable, Straight Feed (Cut in field)                                                  | C144               |           |
| <b>Optic</b>                                                                              |                    |           |
| 50° Cut-off Cone<br>(Not available with SWFL distribution)                                | DNT                |           |
| 50° Cut-off Cone with Solite Lens<br>(NFL distribution only)                              | DNTS               |           |
| 80° Cut-off Cone<br>(SWFL distribution only)                                              | DSS                |           |
| <b>Distribution</b>                                                                       |                    |           |
| Narrow Flood                                                                              | NFL                |           |
| Flood 1                                                                                   | FL1                |           |
| Flood 2                                                                                   | FL2                |           |
| Wide Flood                                                                                | WFL                |           |
| Super Wide Flood                                                                          | SWFL               |           |
| <b>Factory Options</b>                                                                    |                    |           |
| Emergency Battery<br>(J-box cannot be recessed above the ceiling.<br>Remote test switch.) | EMR                |           |
| <b>Reflector Color: Clear Diffuse</b>                                                     | —                  | <b>CD</b> |
| <b>Luminaire Finish</b>                                                                   |                    |           |
| Black with Black cord                                                                     | BK                 |           |
| White with White cord                                                                     | WH                 |           |

| ID+ 3.5" Round Cylinder Surface Mount                                                     | —                  | FLCY3     |
|-------------------------------------------------------------------------------------------|--------------------|-----------|
| <b>Trim Type: Round</b>                                                                   | —                  | <b>RD</b> |
| <b>Decorative Reveal</b>                                                                  |                    |           |
| White Non-Glow Reveal                                                                     | WHR                |           |
| Black Non-Glow Reveal                                                                     | BKR                |           |
| White Glowing Reveal                                                                      | WHG                |           |
| <b>Lumen Output</b>                                                                       |                    |           |
| 700 Lumens                                                                                | 700L               |           |
| 1000 Lumens                                                                               | 1000L              |           |
| 1500 Lumens                                                                               | 1500L              |           |
| 1700 Lumens                                                                               | 1700L              |           |
| 2000 Lumens<br>(Power Canopy only)                                                        | 2000L              |           |
| <b>Color Temperature</b>                                                                  |                    |           |
| 3000K, 80+ CRI                                                                            | 30K                |           |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                          | 35K <b>or</b> 935K |           |
| 4000K, 80+ CRI                                                                            | 40K                |           |
| <b>Single Circuit</b>                                                                     | —                  | <b>1C</b> |
| <b>Voltage</b>                                                                            |                    |           |
| 120/277 UNV                                                                               | UNV                |           |
| 120 Volt                                                                                  | 120                |           |
| 277 Volt                                                                                  | 277                |           |
| <b>Canopy Configuration</b>                                                               |                    |           |
| Shallow Canopy, Integral Driver<br>(LT1 & LFP only)                                       | SC                 |           |
| Power Canopy                                                                              | PC                 |           |
| <b>Dimming Level</b>                                                                      |                    |           |
| 0-10V - 0% Dimming                                                                        | LZ1                |           |
| 0-10V - 1% Dimming                                                                        | L11                |           |
| Forward Phase - 1% Dimming<br>(Shallow Canopy, Integral Driver, 120V only)                | LFP                |           |
| <b>Mounting: Surface Mount</b>                                                            | —                  | <b>SM</b> |
| <b>Optic</b>                                                                              |                    |           |
| 50° Cut-off Cone<br>(Not available with SWFL distribution)                                | DNT                |           |
| 50° Cut-off Cone with Solite Lens<br>(NFL distribution only)                              | DNTS               |           |
| 80° Cut-off Cone<br>(SWFL distribution only)                                              | DSS                |           |
| <b>Distribution</b>                                                                       |                    |           |
| Narrow Flood                                                                              | NFL                |           |
| Flood 1                                                                                   | FL1                |           |
| Flood 2                                                                                   | FL2                |           |
| Wide Flood                                                                                | WFL                |           |
| Super Wide Flood                                                                          | SWFL               |           |
| <b>Factory Options</b>                                                                    |                    |           |
| Emergency Battery<br>(J-box cannot be recessed above the ceiling.<br>Remote test switch.) | EMR                |           |
| <b>Reflector Color: Clear Diffuse</b>                                                     | —                  | <b>CD</b> |
| <b>Luminaire Finish</b>                                                                   |                    |           |
| Black with Black cord                                                                     | BK                 |           |
| White with White cord                                                                     | WH                 |           |

**QS QUICKSHIP TERMS**  
10 DAY: 50 pieces or less

**QS QUICKSHIP TERMS**  
10 DAY: 50 pieces or less



# ID + 4.5"

## CYLINDERS



\*Surface Mount Only

# ID+ 4.5" CYLINDERS



| ID+ 4.5" Round Cylinder Pendant                                                           | —                  | FLCY4     |
|-------------------------------------------------------------------------------------------|--------------------|-----------|
| <b>Trim Type: Round</b>                                                                   | —                  | <b>RD</b> |
| <b>Decorative Reveal</b>                                                                  |                    |           |
| White Non-Glow Reveal                                                                     | WHR                |           |
| Black Non-Glow Reveal                                                                     | BKR                |           |
| White Glowing Reveal                                                                      | WHG                |           |
| <b>Lumen Output</b>                                                                       |                    |           |
| 1000 Lumens                                                                               | 1000L              |           |
| 1500 Lumens                                                                               | 1500L              |           |
| 2000 Lumens                                                                               | 2000L              |           |
| 2500 Lumens                                                                               | 2500L              |           |
| 3000 Lumens<br>(Power Canopy only)                                                        | 3000L              |           |
| <b>Color Temperature</b>                                                                  |                    |           |
| 3000K, 80+ CRI                                                                            | 30K                |           |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                          | 35K <b>or</b> 935K |           |
| 4000K, 80+ CRI                                                                            | 40K                |           |
| <b>Single Circuit</b>                                                                     | —                  | <b>1C</b> |
| <b>Voltage</b>                                                                            |                    |           |
| 120/277 UNV                                                                               | UNV                |           |
| 120 Volt                                                                                  | 120                |           |
| 277 Volt                                                                                  | 277                |           |
| <b>Canopy Configuration</b>                                                               |                    |           |
| Shallow Canopy, Integral Driver<br>(LT1 & LFP only)                                       | SC                 |           |
| Power Canopy                                                                              | PC                 |           |
| <b>Dimming Level</b>                                                                      |                    |           |
| 0-10V - 0% Dimming                                                                        | LZ1                |           |
| 0-10V - 1% Dimming                                                                        | L11                |           |
| Forward Phase - 1% Dimming<br>(Shallow Canopy, Integral Driver, 120V only)                | LFP                |           |
| <b>Mounting</b>                                                                           |                    |           |
| 72" Cable, Straight Feed (Cut in field)                                                   | C72                |           |
| 144" Cable, Straight Feed (Cut in field)                                                  | C144               |           |
| <b>Optic</b>                                                                              |                    |           |
| 50° Cut-off Cone<br>(Not available with SWFL distribution)                                | DNT                |           |
| 50° Cut-off Cone with Solite Lens<br>(NFL distribution only)                              | DNTS               |           |
| 80° Cut-off Cone<br>(SWFL distribution only)                                              | DSS                |           |
| <b>Distribution</b>                                                                       |                    |           |
| Spot<br>(1000L & 1500L only)                                                              | SP                 |           |
| Narrow Flood                                                                              | NFL                |           |
| Flood                                                                                     | FL                 |           |
| Wide Flood                                                                                | WFL                |           |
| Very Wide Flood                                                                           | VWFL               |           |
| Super Wide Flood                                                                          | SWFL               |           |
| <b>Factory Options</b>                                                                    |                    |           |
| Emergency Battery<br>(J-box cannot be recessed above the ceiling.<br>Remote test switch.) | EMR                |           |
| <b>Reflector Color: Clear Diffuse</b>                                                     | —                  | <b>CD</b> |
| <b>Luminaire Finish</b>                                                                   |                    |           |
| Black with Black cord                                                                     | BK                 |           |
| White with White cord                                                                     | WH                 |           |

| ID+ 4.5" Round Cylinder Surface Mount                                                     | —                  | FLCY4     |
|-------------------------------------------------------------------------------------------|--------------------|-----------|
| <b>Trim Type: Round</b>                                                                   | —                  | <b>RD</b> |
| <b>Decorative Reveal</b>                                                                  |                    |           |
| White Non-Glow Reveal                                                                     | WHR                |           |
| Black Non-Glow Reveal                                                                     | BKR                |           |
| White Glowing Reveal                                                                      | WHG                |           |
| <b>Lumen Output</b>                                                                       |                    |           |
| 1000 Lumens                                                                               | 1000L              |           |
| 1500 Lumens                                                                               | 1500L              |           |
| 2000 Lumens                                                                               | 2000L              |           |
| 2500 Lumens                                                                               | 2500L              |           |
| 3000 Lumens<br>(Power Canopy only)                                                        | 3000L              |           |
| <b>Color Temperature</b>                                                                  |                    |           |
| 3000K, 80+ CRI                                                                            | 30K                |           |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                          | 35K <b>or</b> 935K |           |
| 4000K, 80+ CRI                                                                            | 40K                |           |
| <b>Single Circuit</b>                                                                     | —                  | <b>1C</b> |
| <b>Voltage</b>                                                                            |                    |           |
| 120/277 UNV                                                                               | UNV                |           |
| 120 Volt                                                                                  | 120                |           |
| 277 Volt                                                                                  | 277                |           |
| <b>Shallow Canopy, Integral Driver</b>                                                    | —                  | <b>SC</b> |
| <b>Dimming Level</b>                                                                      |                    |           |
| 0-10V - 1% Dimming                                                                        | L11                |           |
| Forward Phase - 1% Dimming<br>(120V only)                                                 | LFP                |           |
| <b>Mounting: Surface Mount</b>                                                            | —                  | <b>SM</b> |
| <b>Optic</b>                                                                              |                    |           |
| 50° Cut-off Cone<br>(Not available with SWFL distribution)                                | DNT                |           |
| 50° Cut-off Cone with Solite Lens<br>(NFL distribution only)                              | DNTS               |           |
| 80° Cut-off Cone<br>(SWFL distribution only)                                              | DSS                |           |
| <b>Distribution</b>                                                                       |                    |           |
| Spot<br>(1000L & 1500L only)                                                              | SP                 |           |
| Narrow Flood                                                                              | NFL                |           |
| Flood                                                                                     | FL                 |           |
| Wide Flood                                                                                | WFL                |           |
| Very Wide Flood                                                                           | VWFL               |           |
| Super Wide Flood                                                                          | SWFL               |           |
| <b>Factory Options</b>                                                                    |                    |           |
| Emergency Battery<br>(J-box cannot be recessed above the ceiling.<br>Remote test switch.) | EMR                |           |
| <b>Reflector Color: Clear Diffuse</b>                                                     | —                  | <b>CD</b> |
| <b>Luminaire Finish</b>                                                                   |                    |           |
| Black with Black cord                                                                     | BK                 |           |
| White with White cord                                                                     | WH                 |           |

**QS QUICKSHIP TERMS**  
10 DAY: 50 pieces or less

**QS QUICKSHIP TERMS**  
10 DAY: 50 pieces or less



# SEEM<sup>®</sup>1

SUSPENDED & DIRECT/INDIRECT



# SEEM 1 LED



| Seem 1                                                                                                                                                                                                                            | —                  | FSM1S          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------|
| <b>Shielding</b>                                                                                                                                                                                                                  |                    |                |
| Asymmetric Lens                                                                                                                                                                                                                   | AS                 |                |
| Batwing Lens                                                                                                                                                                                                                      | BW                 |                |
| Flush Lens                                                                                                                                                                                                                        | FL                 |                |
| <b>Lumen Output</b>                                                                                                                                                                                                               |                    |                |
| 125 Lumens per foot<br>(4' minimum length.)                                                                                                                                                                                       | 125LF              |                |
| 250 Lumens per foot<br>(3' minimum length.)                                                                                                                                                                                       | 250LF              |                |
| 375 Lumens per foot                                                                                                                                                                                                               | 375LF              |                |
| 500 Lumens per foot                                                                                                                                                                                                               | 500LF              |                |
| 625 Lumens per foot                                                                                                                                                                                                               | 625LF              |                |
| <b>Color Temperature</b>                                                                                                                                                                                                          |                    |                |
| 3000K, 80+ CRI <b>or</b> 90+ CRI                                                                                                                                                                                                  | 30K <b>or</b> 930K |                |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                                                                                                                                                                  | 35K <b>or</b> 935K |                |
| 4000K, 80+ CRI                                                                                                                                                                                                                    | 40K                |                |
| <b>Single Circuit</b>                                                                                                                                                                                                             |                    |                |
| 120/277 UNV Voltage                                                                                                                                                                                                               | —                  | <b>1C</b>      |
| <b>Control System &amp; Dimming Level</b>                                                                                                                                                                                         |                    |                |
| 0-10V - 1% Dimming                                                                                                                                                                                                                | L11                |                |
| 0-10V - 10% Dimming                                                                                                                                                                                                               | LD1                |                |
| <b>Mounting</b>                                                                                                                                                                                                                   |                    |                |
| 24" Cable Suspension                                                                                                                                                                                                              | C24__              |                |
| 48" Cable Suspension                                                                                                                                                                                                              | C48__              |                |
| 96" Cable Suspension<br>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)<br>(Specify one of the following in place of "C"<br>J - for 2" canopies at non-feed locations.<br>CS - for sloped ceiling applications.) | C96__              |                |
| Surface Mount                                                                                                                                                                                                                     | SM                 |                |
| <b>Factory Options</b>                                                                                                                                                                                                            |                    |                |
| Black Cord                                                                                                                                                                                                                        | BKCD               |                |
| Emergency Circuit*                                                                                                                                                                                                                | _EC                |                |
| Emergency Battery Pack*                                                                                                                                                                                                           | _EM                |                |
| <b>Finish</b>                                                                                                                                                                                                                     |                    |                |
| Black                                                                                                                                                                                                                             | BK                 |                |
| White                                                                                                                                                                                                                             | WH                 |                |
| <b>Length</b>                                                                                                                                                                                                                     |                    |                |
| Specify luminaire/row<br>length in 1" increments<br>(2' minimum length.)                                                                                                                                                          | _ft. _in.          | <b>ft. in.</b> |

| Seem 1 Direct/Indirect                                                                                                                                                                                                            | —                  | FSM1BS         |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------|
| <b>Shielding</b>                                                                                                                                                                                                                  |                    |                |
| Asymmetric optic top / Asymmetric lens bottom                                                                                                                                                                                     | ASAS               |                |
| Asymmetric optic top / Flush lens bottom                                                                                                                                                                                          | ASFL               |                |
| Batwing optic top / Asymmetric lens bottom                                                                                                                                                                                        | BWAS               |                |
| Batwing optic top / Flush lens bottom                                                                                                                                                                                             | BWFL               |                |
| Batwing optic top / Batwing lens bottom                                                                                                                                                                                           | BWBW               |                |
| Dust cover top / Asymmetric lens bottom                                                                                                                                                                                           | DCAS               |                |
| Dust cover top / Flush lens bottom                                                                                                                                                                                                | DCFL               |                |
| Dust cover top / Batwing lens bottom                                                                                                                                                                                              | DCBW               |                |
| <b>Direct Distribution</b>                                                                                                                                                                                                        |                    |                |
| 125 Lumens per foot                                                                                                                                                                                                               | 125DN              |                |
| 250 Lumens per foot                                                                                                                                                                                                               | 250DN              |                |
| 375 Lumens per foot                                                                                                                                                                                                               | 375DN              |                |
| 500 Lumens per foot                                                                                                                                                                                                               | 500DN              |                |
| 625 Lumens per foot                                                                                                                                                                                                               | 625DN              |                |
| <b>Indirect Distribution</b>                                                                                                                                                                                                      |                    |                |
| 125 Lumens per foot                                                                                                                                                                                                               | 125UP              |                |
| 250 Lumens per foot                                                                                                                                                                                                               | 250UP              |                |
| 375 Lumens per foot                                                                                                                                                                                                               | 375UP              |                |
| 500 Lumens per foot                                                                                                                                                                                                               | 500UP              |                |
| 625 Lumens per foot                                                                                                                                                                                                               | 625UP              |                |
| 800 Lumens per foot                                                                                                                                                                                                               | 800UP              |                |
| 1000 Lumens per foot                                                                                                                                                                                                              | 1000UP             |                |
| <b>Color Temperature</b>                                                                                                                                                                                                          |                    |                |
| 3000K, 80+ CRI <b>or</b> 90+ CRI                                                                                                                                                                                                  | 30K <b>or</b> 930K |                |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                                                                                                                                                                  | 35K <b>or</b> 935K |                |
| 4000K, 80+ CRI                                                                                                                                                                                                                    | 40K                |                |
| <b>Single Circuit</b>                                                                                                                                                                                                             |                    |                |
| Single Circuit                                                                                                                                                                                                                    | 1C                 |                |
| Dual Circuit                                                                                                                                                                                                                      | 2C                 |                |
| <b>120/277 UNV Voltage</b>                                                                                                                                                                                                        |                    |                |
| Control System & Dimming Level                                                                                                                                                                                                    | —                  | <b>UNV</b>     |
| 0-10V - 1% Dimming                                                                                                                                                                                                                | L11                |                |
| 0-10V - 10% Dimming                                                                                                                                                                                                               | LD1                |                |
| <b>Mounting</b>                                                                                                                                                                                                                   |                    |                |
| 24" Cable Suspension                                                                                                                                                                                                              | C24__              |                |
| 48" Cable Suspension                                                                                                                                                                                                              | C48__              |                |
| 96" Cable Suspension<br>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)<br>(Specify one of the following in place of "C"<br>J - for 2" canopies at non-feed locations.<br>CS - for sloped ceiling applications.) | C96__              |                |
| <b>Factory Options</b>                                                                                                                                                                                                            |                    |                |
| Black Cord                                                                                                                                                                                                                        | BKCD               |                |
| <b>Finish</b>                                                                                                                                                                                                                     |                    |                |
| Black                                                                                                                                                                                                                             | BK                 |                |
| White                                                                                                                                                                                                                             | WH                 |                |
| <b>Length</b>                                                                                                                                                                                                                     |                    |                |
| Specify luminaire/row<br>length in 1" increments<br>(4' minimum length.)                                                                                                                                                          | _ft. _in.          | <b>ft. in.</b> |

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** 4' minimum length, maximum of 3 locations.  
See cut sheet ordering guide for emergency  
option ordering details.

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length




# SEEM<sup>®</sup> 1 RECESSED





# SEEM 1 LED

| Seem 1                                                                                                                                                                          | —                  | FSM1           |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------|
| <b>Shielding</b>                                                                                                                                                                |                    |                |
| Asymmetric Lens                                                                                                                                                                 | AS                 | _____          |
| Batwing Lens                                                                                                                                                                    | BW                 | _____          |
| Flush Lens                                                                                                                                                                      | FL                 | _____          |
| <b>Lumen Output</b>                                                                                                                                                             |                    |                |
| 125 Lumens per foot<br>(4' minimum length.)                                                                                                                                     | 125LF              | _____          |
| 250 Lumens per foot<br>(3' minimum length.)                                                                                                                                     | 250LF              | _____          |
| 375 Lumens per foot                                                                                                                                                             | 375LF              | _____          |
| 500 Lumens per foot                                                                                                                                                             | 500LF              | _____          |
| 625 Lumens per foot                                                                                                                                                             | 625LF              | _____          |
| <b>Color Temperature</b>                                                                                                                                                        |                    |                |
| 3000K, 80+ CRI <b>or</b> 90+ CRI                                                                                                                                                | 30K <b>or</b> 930K | _____          |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                                                                                                                | 35K <b>or</b> 935K | _____          |
| 4000K, 80+ CRI                                                                                                                                                                  | 40K                | _____          |
| <b>Single Circuit</b>                                                                                                                                                           | —                  | <b>1C</b>      |
| <b>120/277 UNV Voltage</b>                                                                                                                                                      | —                  | <b>UNV</b>     |
| <b>Control System &amp; Dimming Level</b>                                                                                                                                       |                    |                |
| 0-10V - 1% Dimming                                                                                                                                                              | L11                | _____          |
| 0-10V - 10% Dimming                                                                                                                                                             | LD1                | _____          |
| <b>Mounting</b>                                                                                                                                                                 |                    |                |
| Standard 15/16" Lay-in                                                                                                                                                          | G1                 | _____          |
| Standard 15/16" Tegular                                                                                                                                                         | T1                 | _____          |
| Standard 9/16" Lay-in                                                                                                                                                           | G2                 | _____          |
| Standard 9/16" Tegular                                                                                                                                                          | T2                 | _____          |
| 9/16" Slot-tee Tegular                                                                                                                                                          | G3                 | _____          |
| Tall 15/16" Lay-in                                                                                                                                                              | G4                 | _____          |
| Tall 15/16" Tegular                                                                                                                                                             | T4                 | _____          |
| Tall 9/16" Lay-in                                                                                                                                                               | G5                 | _____          |
| Tall 9/16" Tegular                                                                                                                                                              | T5                 | _____          |
| Node 9/16" Tegular                                                                                                                                                              | T6                 | _____          |
| Mud-in Trimless                                                                                                                                                                 | XFF                | _____          |
| Non-Drywall Hard Surface                                                                                                                                                        | XFN                | _____          |
| Hard Surface, Wood                                                                                                                                                              | XFW                | _____          |
| <b>Factory Options</b>                                                                                                                                                          |                    |                |
| Chicago Plenum                                                                                                                                                                  | CP                 | _____          |
| Emergency Circuit*                                                                                                                                                              | _EC                | _____          |
| Emergency Battery Pack*                                                                                                                                                         | _EM                | _____          |
| 6' New York City Flex Whip (120V)                                                                                                                                               | FNY1               | _____          |
| 6' New York City Flex Whip (277V)                                                                                                                                               | FNY2               | _____          |
| 6' Flex Whip                                                                                                                                                                    | FW                 | _____          |
| <b>Finish: Matte White Housing</b>                                                                                                                                              | —                  | <b>WH</b>      |
| <b>Length</b>                                                                                                                                                                   |                    | <b>ft. in.</b> |
| Specify luminaire/row<br>length in 1" increments<br>(2' minimum length, lengths are nominal, 1" increments based<br>on T-centers. Housing length is 1" shorter than specified.) | _ft. _in.          | _____          |
| <b>Pattern</b><br>(3' minimum length)                                                                                                                                           |                    |                |
| 'L' Pattern                                                                                                                                                                     | A' x B'            | _____          |
| 'U' Pattern                                                                                                                                                                     | A' x B' x C'       | _____          |
| Rectangle Pattern                                                                                                                                                               | A' x B' R          | _____          |

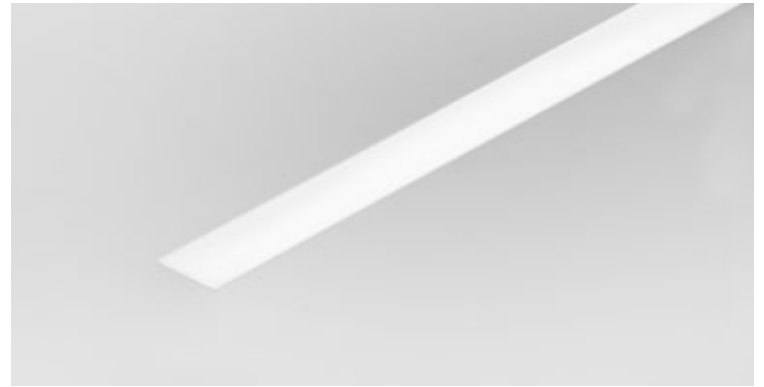

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length. 48' maximum per pattern section.

**\*EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

# SEEM<sup>®</sup> 2

## SUSPENDED & WALL MOUNT



# SEEM 2 LED



| Seem 2                                                                                                                                | —                  | FSM2LS     |
|---------------------------------------------------------------------------------------------------------------------------------------|--------------------|------------|
| <b>Shielding</b>                                                                                                                      |                    |            |
| Asymmetric Lens                                                                                                                       | AS                 |            |
| Batwing Lens                                                                                                                          | BW                 |            |
| Flush Satin Lens                                                                                                                      | FL                 |            |
| 0.5" Pop-Down Lens                                                                                                                    | PD05               |            |
| <b>Lumen Output</b>                                                                                                                   |                    |            |
| 125 Lumens per foot<br>(4' minimum length.)                                                                                           | 125LF              |            |
| 250 Lumens per foot                                                                                                                   | 250LF              |            |
| 375 Lumens per foot                                                                                                                   | 375LF              |            |
| 500 Lumens per foot                                                                                                                   | 500LF              |            |
| 625 Lumens per foot                                                                                                                   | 625LF              |            |
| 750 Lumens per foot                                                                                                                   | 750LF              |            |
| 875 Lumens per foot                                                                                                                   | 875LF              |            |
| 1000 Lumens per foot                                                                                                                  | 1000LF             |            |
| <b>Color Temperature</b>                                                                                                              |                    |            |
| 3000K, 80+ CRI <b>or</b> 90+ CRI                                                                                                      | 30K <b>or</b> 930K |            |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                                                                      | 35K <b>or</b> 935K |            |
| 4000K, 80+ CRI                                                                                                                        | 40K                |            |
| <b>Single Circuit</b>                                                                                                                 |                    | <b>1C</b>  |
| <b>120/277 UNV Voltage</b>                                                                                                            |                    | <b>UNV</b> |
| <b>Control System &amp; Dimming Level</b>                                                                                             |                    |            |
| 0-10V - 1% Dimming                                                                                                                    | L11                |            |
| 0-10V - 10% Dimming                                                                                                                   | LD1                |            |
| <b>Mounting</b>                                                                                                                       |                    |            |
| 24" Cable Suspension                                                                                                                  | C24__              |            |
| 48" Cable Suspension                                                                                                                  | C48__              |            |
| 96" Cable Suspension<br>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)                                              | C96__              |            |
| (Specify one of the following in place of "C"<br>J - for 2" canopies at non-feed locations.<br>CS - for sloped ceiling applications.) |                    |            |
| Surface Mount                                                                                                                         | SM                 |            |
| <b>Factory Options</b>                                                                                                                |                    |            |
| Black Cord                                                                                                                            | BKCD               |            |
| Emergency Circuit*                                                                                                                    | _EC                |            |
| Emergency Battery Pack*                                                                                                               | _EM                |            |
| <b>Finish</b>                                                                                                                         |                    |            |
| Black                                                                                                                                 | BK                 |            |
| White                                                                                                                                 | WH                 |            |
| <b>Length</b>                                                                                                                         |                    |            |
| Specify luminaire/row<br>length in 1' increments<br>(2' minimum length.)                                                              | X'                 |            |

| Seem 2 Wall Mount                                                        | —                  | FSM2LW     |
|--------------------------------------------------------------------------|--------------------|------------|
| <b>Shielding</b>                                                         |                    |            |
| Asymmetric Lens                                                          | AS                 |            |
| Flush Satin Lens                                                         | FL                 |            |
| 0.5" Pop-Down Lens                                                       | PD05               |            |
| <b>Lumen Output</b>                                                      |                    |            |
| 125 Lumens per foot<br>(4' minimum length.)                              | 125LF              |            |
| 250 Lumens per foot                                                      | 250LF              |            |
| 375 Lumens per foot                                                      | 375LF              |            |
| 500 Lumens per foot                                                      | 500LF              |            |
| 625 Lumens per foot                                                      | 625LF              |            |
| 750 Lumens per foot                                                      | 750LF              |            |
| 875 Lumens per foot                                                      | 875LF              |            |
| 1000 Lumens per foot                                                     | 1000LF             |            |
| <b>Color Temperature</b>                                                 |                    |            |
| 3000K, 80+ CRI <b>or</b> 90+ CRI                                         | 30K <b>or</b> 930K |            |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                         | 35K <b>or</b> 935K |            |
| 4000K, 80+ CRI                                                           | 40K                |            |
| <b>Single Circuit</b>                                                    |                    | <b>1C</b>  |
| <b>120/277 UNV Voltage</b>                                               |                    | <b>UNV</b> |
| <b>Control System &amp; Dimming Level</b>                                |                    |            |
| 0-10V - 1% Dimming                                                       | L11                |            |
| 0-10V - 10% Dimming                                                      | LD1                |            |
| <b>Wall Mount</b>                                                        |                    | <b>WM</b>  |
| <b>Factory Options</b>                                                   |                    |            |
| Emergency Circuit*                                                       | _EC                |            |
| Emergency Battery Pack*                                                  | _EM                |            |
| <b>Finish</b>                                                            |                    |            |
| Black                                                                    | BK                 |            |
| White                                                                    | WH                 |            |
| <b>Length</b>                                                            |                    |            |
| Specify luminaire/row<br>length in 1' increments<br>(2' minimum length.) | X'                 |            |



## QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** 3' minimum length, maximum of 3 locations.  
See cut sheet ordering guide for emergency  
option ordering details.



## QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** 3' minimum length, maximum of 3 locations.  
See cut sheet ordering guide for emergency  
option ordering details.




# SEEM<sup>®</sup> 2

DIRECT/INDIRECT & WALL MOUNT



# SEEM 2 LED

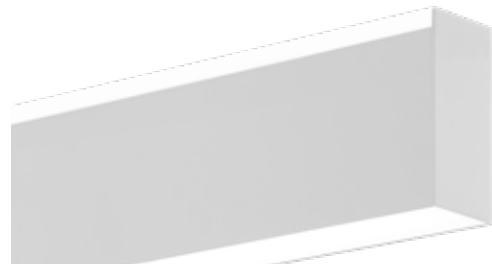

| Seem 2 Direct/Indirect                                                          | —                  | FSM2BS     |
|---------------------------------------------------------------------------------|--------------------|------------|
| <b>Shielding</b>                                                                |                    |            |
| Asymmetric optic top / Asymmetric lens bottom                                   | ASAS               |            |
| Asymmetric optic top / Flush lens bottom                                        | ASFL               |            |
| Asymmetric optic top / 0.5" Pop-down lens bottom                                | ASPD05             |            |
| Batwing optic top / Asymmetric lens bottom                                      | BWAS               |            |
| Batwing optic top / Batwing lens bottom                                         | BWBW               |            |
| Batwing optic top / Flush lens bottom                                           | BWFL               |            |
| Batwing optic top / 0.5" Pop-down lens bottom                                   | BWPD05             |            |
| Dust cover top / Asymmetric lens bottom                                         | DCAS               |            |
| Dust cover top / Batwing lens bottom                                            | DCBW               |            |
| Dust cover top / Flush lens bottom                                              | DCFL               |            |
| Dust cover top / 0.5" Pop-down lens bottom                                      | DCPD05             |            |
| <b>Direct Distribution</b>                                                      |                    |            |
| 125 Lumens per foot                                                             | 125DN              |            |
| 250 Lumens per foot                                                             | 250DN              |            |
| 375 Lumens per foot                                                             | 375DN              |            |
| 500 Lumens per foot                                                             | 500DN              |            |
| 625 Lumens per foot                                                             | 625DN              |            |
| 750 Lumens per foot                                                             | 750DN              |            |
| 875 Lumens per foot                                                             | 875DN              |            |
| 1000 Lumens per foot                                                            | 1000DN             |            |
| <b>Indirect Distribution</b>                                                    |                    |            |
| 250 Lumens per foot                                                             | 250UP              |            |
| 375 Lumens per foot                                                             | 375UP              |            |
| 500 Lumens per foot                                                             | 500UP              |            |
| 625 Lumens per foot                                                             | 625UP              |            |
| 750 Lumens per foot                                                             | 750UP              |            |
| 875 Lumens per foot                                                             | 875UP              |            |
| 1000 Lumens per foot                                                            | 1000UP             |            |
| 1250 Lumens per foot                                                            | 1250UP             |            |
| <b>Color Temperature</b>                                                        |                    |            |
| 3000K, 80+ CRI <b>or</b> 90+ CRI                                                | 30K <b>or</b> 930K |            |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                | 35K <b>or</b> 935K |            |
| 4000K, 80+ CRI                                                                  | 40K                |            |
| <b>Single Circuit</b>                                                           |                    |            |
| Single Circuit                                                                  | 1C                 |            |
| Dual Circuit                                                                    | 2C                 |            |
| <b>120/277 UNV Voltage</b>                                                      |                    |            |
|                                                                                 | —                  | <b>UNV</b> |
| <b>Control System &amp; Dimming Level</b>                                       |                    |            |
| 0-10V - 1% Dimming                                                              | L11                |            |
| 0-10V - 10% Dimming                                                             | LD1                |            |
| <b>Mounting</b>                                                                 |                    |            |
| 24" Cable Suspension                                                            | C24_               |            |
| 48" Cable Suspension                                                            | C48_               |            |
| 96" Cable Suspension                                                            | C96_               |            |
| <small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small> |                    |            |
| <small>(Specify one of the following in place of "C"</small>                    |                    |            |
| <small>J - for 2" canopies at non-feed locations.</small>                       |                    |            |
| <small>CS - for sloped ceiling applications.)</small>                           |                    |            |
| <b>Factory Options</b>                                                          |                    |            |
| Black Cord                                                                      | BKCD               |            |
| Emergency Circuit*                                                              | _EC                |            |
| Emergency Battery Pack*                                                         | _EM                |            |
| <b>Finish</b>                                                                   |                    |            |
| Black                                                                           | BK                 |            |
| White                                                                           | WH                 |            |
| <b>Length</b>                                                                   |                    |            |
| Specify luminaire/row length in 1' increments                                   | X'                 |            |
| <small>(4' minimum length.)</small>                                             |                    |            |

| Seem 2 Direct/Indirect Wall Mount                | —                  | FSM2BW     |
|--------------------------------------------------|--------------------|------------|
| <b>Shielding</b>                                 |                    |            |
| Asymmetric optic top / Asymmetric lens bottom    | ASAS               |            |
| Asymmetric optic top / Flush lens bottom         | ASFL               |            |
| Asymmetric optic top / 0.5" Pop-down lens bottom | ASPD05             |            |
| Dust cover top / Asymmetric lens bottom          | DCAS               |            |
| Dust cover top / Flush lens bottom               | DCFL               |            |
| Dust cover top / 0.5" Pop-down lens bottom       | DCPD05             |            |
| <b>Direct Distribution</b>                       |                    |            |
| 125 Lumens per foot                              | 125DN              |            |
| 250 Lumens per foot                              | 250DN              |            |
| 375 Lumens per foot                              | 375DN              |            |
| 500 Lumens per foot                              | 500DN              |            |
| 625 Lumens per foot                              | 625DN              |            |
| 750 Lumens per foot                              | 750DN              |            |
| 875 Lumens per foot                              | 875DN              |            |
| 1000 Lumens per foot                             | 1000DN             |            |
| <b>Indirect Distribution</b>                     |                    |            |
| 250 Lumens per foot                              | 250UP              |            |
| 375 Lumens per foot                              | 375UP              |            |
| 500 Lumens per foot                              | 500UP              |            |
| 625 Lumens per foot                              | 625UP              |            |
| 750 Lumens per foot                              | 750UP              |            |
| 875 Lumens per foot                              | 875UP              |            |
| 1000 Lumens per foot                             | 1000UP             |            |
| 1250 Lumens per foot                             | 1250UP             |            |
| <b>Color Temperature</b>                         |                    |            |
| 3000K, 80+ CRI <b>or</b> 90+ CRI                 | 30K <b>or</b> 930K |            |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                 | 35K <b>or</b> 935K |            |
| 4000K, 80+ CRI                                   | 40K                |            |
| <b>Single Circuit</b>                            |                    |            |
| Single Circuit                                   | 1C                 |            |
| Dual Circuit                                     | 2C                 |            |
| <b>120/277 UNV Voltage</b>                       |                    |            |
|                                                  | —                  | <b>UNV</b> |
| <b>Control System &amp; Dimming Level</b>        |                    |            |
| 0-10V - 1% Dimming                               | L11                |            |
| 0-10V - 10% Dimming                              | LD1                |            |
| <b>Wall Mount</b>                                |                    |            |
|                                                  | —                  | <b>WM</b>  |
| <b>Factory Options</b>                           |                    |            |
| Emergency Circuit*                               | _EC                |            |
| Emergency Battery Pack*                          | _EM                |            |
| <b>Finish</b>                                    |                    |            |
| Black                                            | BK                 |            |
| White                                            | WH                 |            |
| <b>Length</b>                                    |                    |            |
| Specify luminaire/row length in 1' increments    | X'                 |            |
| <small>(4' minimum length.)</small>              |                    |            |

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** Maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

## QS QUICKSHIP TERMS


**10 DAY:** 1000' total length

**\*EC & EM:** Maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.



# SEEM<sup>®</sup> 2

## RECESSED

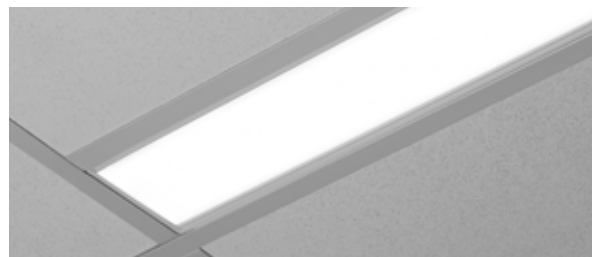

| Seem 2 LED                                                                                                                                                             | —                  | FSM2L          |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|----------------|
| <b>Shielding</b>                                                                                                                                                       |                    |                |
| Asymmetric Lens                                                                                                                                                        | AS                 |                |
| Batwing Lens                                                                                                                                                           | BW                 |                |
| Flush Satin Lens                                                                                                                                                       | FL                 |                |
| 0.5" Pop-Down Lens                                                                                                                                                     | PD05               |                |
| Regress Lens<br>(Housing height 5.5". Ceiling applications only)                                                                                                       | SR                 |                |
| Regress High Performance Lens<br>(Housing height 5.5". Ceiling applications only)                                                                                      | SRXP               |                |
| <b>Lumen Output</b>                                                                                                                                                    |                    |                |
| 125 Lumens per foot<br>(LD1 & L11 only, 4' minimum.)                                                                                                                   | 125LF              |                |
| 250 Lumens per foot                                                                                                                                                    | 250LF              |                |
| 375 Lumens per foot                                                                                                                                                    | 375LF              |                |
| 500 Lumens per foot                                                                                                                                                    | 500LF              |                |
| 625 Lumens per foot                                                                                                                                                    | 625LF              |                |
| 750 Lumens per foot*                                                                                                                                                   | 750LF              |                |
| 875 Lumens per foot*                                                                                                                                                   | 875LF              |                |
| 1000 Lumens per foot*<br>(*Not available with SR & SRXP)                                                                                                               | 1000LF             |                |
| <b>Color Temperature</b>                                                                                                                                               |                    |                |
| 3000K, 80+ CRI <b>or</b> 90+ CRI                                                                                                                                       | 30K <b>or</b> 930K |                |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                                                                                                       | 35K <b>or</b> 935K |                |
| 4000K, 80+ CRI                                                                                                                                                         | 40K                |                |
| <b>Single Circuit</b>                                                                                                                                                  |                    |                |
| <b>120/277 UNV Voltage</b>                                                                                                                                             | —                  | <b>1C</b>      |
| <b>Control System &amp; Dimming Level</b>                                                                                                                              |                    |                |
| 0-10V - 1% Dimming                                                                                                                                                     | L11                |                |
| 0-10V - 10% Dimming                                                                                                                                                    | LD1                |                |
| <b>Mounting</b>                                                                                                                                                        |                    |                |
| Standard 15/16" Lay-in                                                                                                                                                 | G1                 |                |
| Standard 15/16" Tegular                                                                                                                                                | T1                 |                |
| Standard 9/16" Lay-in                                                                                                                                                  | G2                 |                |
| Standard 9/16" Tegular                                                                                                                                                 | T2                 |                |
| 9/16" Slot-tee Tegular                                                                                                                                                 | G3                 |                |
| Tall 15/16" Lay-in                                                                                                                                                     | G4                 |                |
| Tall 15/16" Tegular                                                                                                                                                    | T4                 |                |
| Tall 9/16" Lay-in                                                                                                                                                      | G5                 |                |
| Tall 9/16" Tegular                                                                                                                                                     | T5                 |                |
| Node 9/16" Tegular                                                                                                                                                     | T6                 |                |
| <b>Factory Options</b>                                                                                                                                                 |                    |                |
| Chicago Plenum<br>(Not available with Flex Whip)                                                                                                                       | CP                 |                |
| Emergency Circuit*                                                                                                                                                     | _EC                |                |
| Emergency Battery Pack*                                                                                                                                                | _EM                |                |
| 6' New York City Flex Whip (120V)                                                                                                                                      | FN1                |                |
| 6' New York City Flex Whip (277V)                                                                                                                                      | FN2                |                |
| 6' Flex Whip                                                                                                                                                           | FW                 |                |
| <b>Finish: Matte White Housing</b>                                                                                                                                     |                    |                |
|                                                                                                                                                                        | —                  | <b>WH</b>      |
| <b>Length</b>                                                                                                                                                          |                    |                |
| Specify luminaire/row length in " increments<br>(2' minimum length, lengths are nominal, " increments based on T-centers. Housing length is " shorter than specified.) | _ft. _in.          | <b>ft. in.</b> |
| <b>Pattern</b><br>(3' minimum length)                                                                                                                                  |                    |                |
| 'L' Pattern                                                                                                                                                            | A' x B'            |                |
| 'U' Pattern                                                                                                                                                            | A' x B' x C'       |                |
| Rectangle Pattern                                                                                                                                                      | A' x B' R          |                |

### QS QUICKSHIP TERMS

**10 DAY:** 1000' total length. 48' maximum per pattern section.


**\*EC & EM:** 4' minimum length, maximum of 3 locations.

See cut sheet ordering guide for emergency option ordering details.





# SEEM 2 LED

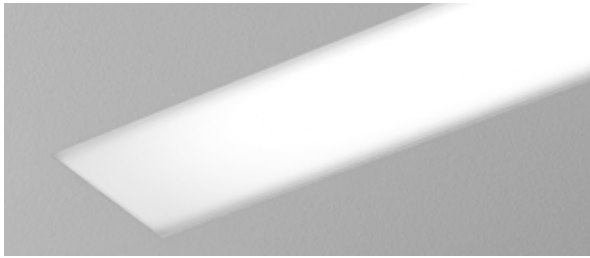

| Seem 2 LED                                                                                                               | —                  | FSM2L          |
|--------------------------------------------------------------------------------------------------------------------------|--------------------|----------------|
| <b>Shielding</b>                                                                                                         |                    |                |
| Flush Satin Lens                                                                                                         | FL                 |                |
| Regress Lens                                                                                                             | SR                 |                |
| (Housing height 5.5' Ceiling applications only)                                                                          |                    |                |
| Regress High Performance Lens                                                                                            | SRXP               |                |
| (Housing height 5.5' Ceiling applications only)                                                                          |                    |                |
| <b>Lumen Output</b>                                                                                                      |                    |                |
| 125 Lumens per foot                                                                                                      | 125LF              |                |
| (LD1 & L11 only, 4' minimum.)                                                                                            |                    |                |
| 250 Lumens per foot                                                                                                      | 250LF              |                |
| 375 Lumens per foot                                                                                                      | 375LF              |                |
| 625 Lumens per foot                                                                                                      | 625LF              |                |
| <b>Color Temperature</b>                                                                                                 |                    |                |
| 3000K, 80+ CRI <b>or</b> 90+ CRI                                                                                         | 30K <b>or</b> 930K |                |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                                                         | 35K <b>or</b> 935K |                |
| 4000K, 80+ CRI                                                                                                           | 40K                |                |
| <b>Single Circuit</b>                                                                                                    | —                  | <b>1C</b>      |
| <b>120/277 UNV Voltage</b>                                                                                               | —                  | <b>UNV</b>     |
| <b>Control System &amp; Dimming Level</b>                                                                                |                    |                |
| 0-10V - 1% Dimming                                                                                                       | L11                |                |
| 0-10V - 10% Dimming                                                                                                      | LD1                |                |
| <b>Mounting</b>                                                                                                          |                    |                |
| Trim Flange Drywall                                                                                                      | TF                 |                |
| Trim Flange Wood                                                                                                         | TFW                |                |
| Mud-in Trimless, pre-set for 1/2" Drywall                                                                                | XF1                |                |
| Mud-in Trimless, pre-set for 5/8" Drywall                                                                                | XF2                |                |
| Mud-in Trimless, set thickness in field                                                                                  | XFF                |                |
| (Mounting equipment assembled in field)                                                                                  |                    |                |
| Non-Drywall Hard Surface                                                                                                 | XFN                |                |
| Hard Surface, Wood                                                                                                       | XFW                |                |
| <b>Factory Options</b>                                                                                                   |                    |                |
| Chicago Plenum                                                                                                           | CP                 |                |
| (Not available with Flex Whip)                                                                                           |                    |                |
| Emergency Circuit*                                                                                                       | _EC                |                |
| Emergency Battery Pack*                                                                                                  | _EM                |                |
| 6' New York City Flex Whip (120V)                                                                                        | FN1                |                |
| 6' New York City Flex Whip (277V)                                                                                        | FN2                |                |
| 6' Flex Whip                                                                                                             | FW                 |                |
| <b>Finish: Matte White Housing</b>                                                                                       | —                  | <b>WH</b>      |
| <b>Length</b>                                                                                                            |                    |                |
| Specify luminaire/row                                                                                                    |                    |                |
| length in 1" increments                                                                                                  | _ft. _in.          | <b>ft. in.</b> |
| (2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.) |                    |                |
| <b>Pattern</b>                                                                                                           |                    |                |
| (3' minimum length)                                                                                                      |                    |                |
| 'L' Pattern                                                                                                              | A' x B'            |                |
| 'U' Pattern                                                                                                              | A' x B' x C'       |                |
| Rectangle Pattern                                                                                                        | A' x B' R          |                |



| Seem 2 LED                                                                                                               | —                  | FSM2L       |
|--------------------------------------------------------------------------------------------------------------------------|--------------------|-------------|
| <b>Shielding - 0.5" Pop-down Lens</b>                                                                                    | —                  | <b>PD05</b> |
| <b>Lumen Output</b>                                                                                                      |                    |             |
| 125 Lumens per foot                                                                                                      | 125LF              |             |
| (LD1 & L11 only, 4' minimum.)                                                                                            |                    |             |
| 250 Lumens per foot                                                                                                      | 250LF              |             |
| 375 Lumens per foot                                                                                                      | 375LF              |             |
| 625 Lumens per foot                                                                                                      | 625LF              |             |
| <b>Color Temperature</b>                                                                                                 |                    |             |
| 3000K, 80+ CRI <b>or</b> 90+ CRI                                                                                         | 30K <b>or</b> 930K |             |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                                                         | 35K <b>or</b> 935K |             |
| 4000K, 80+ CRI                                                                                                           | 40K                |             |
| <b>Single Circuit</b>                                                                                                    | —                  | <b>1C</b>   |
| <b>120/277 UNV Voltage</b>                                                                                               | —                  | <b>UNV</b>  |
| <b>Control System &amp; Dimming Level</b>                                                                                |                    |             |
| 0-10V - 1% Dimming                                                                                                       | L11                |             |
| 0-10V - 10% Dimming                                                                                                      | LD1                |             |
| <b>Mounting</b>                                                                                                          |                    |             |
| Trim Flange Drywall                                                                                                      | TF                 |             |
| Trim Flange Wood                                                                                                         | TFW                |             |
| Mud-in Trimless, pre-set for 1/2" Drywall                                                                                | XF1                |             |
| Mud-in Trimless, pre-set for 5/8" Drywall                                                                                | XF2                |             |
| Mud-in Trimless, set thickness in field                                                                                  | XFF                |             |
| (Mounting equipment assembled in field)                                                                                  |                    |             |
| Non-Drywall Hard Surface                                                                                                 | XFN                |             |
| Hard Surface, Wood                                                                                                       | XFW                |             |
| <b>Factory Options</b>                                                                                                   |                    |             |
| Chicago Plenum                                                                                                           | CP                 |             |
| (Not available with Flex Whip)                                                                                           |                    |             |
| Emergency Circuit*                                                                                                       | _EC                |             |
| Emergency Battery Pack*                                                                                                  | _EM                |             |
| 6' New York City Flex Whip (120V)                                                                                        | FN1                |             |
| 6' New York City Flex Whip (277V)                                                                                        | FN2                |             |
| 6' Flex Whip                                                                                                             | FW                 |             |
| <b>Finish: Matte White Housing</b>                                                                                       | —                  | <b>WH</b>   |
| <b>Length</b>                                                                                                            |                    |             |
| Specify luminaire/row                                                                                                    |                    |             |
| length in 1" increments                                                                                                  | X'                 |             |
| (2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.) |                    |             |

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length. 48' maximum per pattern section.  
**\*EC & EM:** 4' minimum length, maximum of 3 locations.  
 See cut sheet ordering guide for emergency option ordering details.

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length  
**\*EM:** 4' minimum length, maximum of 3 locations.  
 See cut sheet ordering guide for emergency option ordering details.

# SEEM® 4

## SUSPENDED & WALL MOUNT



| Seem 4 LED                                                                      | —           | FSM4LS    |
|---------------------------------------------------------------------------------|-------------|-----------|
| <b>Shielding</b>                                                                |             |           |
| Batwing Lens                                                                    | BW          | _____     |
| Flush Satin Lens                                                                | FL          | _____     |
| <b>Lumen Output</b>                                                             |             |           |
| 275 Lumens per foot                                                             | 275LF       | _____     |
| 375 Lumens per foot                                                             | 375LF       | _____     |
| 625 Lumens per foot                                                             | 625LF       | _____     |
| 875 Lumens per foot                                                             | 875LF       | _____     |
| 1000 Lumens per foot                                                            | 1000LF      | _____     |
| 1125 Lumens per foot                                                            | 1125LF      | _____     |
| 1250 Lumens per foot                                                            | 1250LF      | _____     |
| <b>Color Temperature</b>                                                        |             |           |
| 3000K, 80+ CRI                                                                  | 30K         | _____     |
| 3500K, 80+ CRI or 90+ CRI                                                       | 35K or 935K | _____     |
| 4000K, 80+ CRI                                                                  | 40K         | _____     |
| <b>Single Circuit</b>                                                           |             |           |
| 120/277 UNV Voltage                                                             | —           | <b>1C</b> |
| <b>Control System &amp; Dimming Level</b>                                       |             |           |
| 0-10V - 1% Dimming                                                              | L11         | _____     |
| 0-10V - 10% Dimming                                                             | LD1         | _____     |
| <b>Mounting</b>                                                                 |             |           |
| 24" Cable Suspension                                                            | C24_        | _____     |
| 48" Cable Suspension                                                            | C48_        | _____     |
| 96" Cable Suspension                                                            | C96_        | _____     |
| <small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small> |             |           |
| <small>(Specify one of the following in place of "C"</small>                    |             |           |
| <small>J - for 2" canopies at non-feed locations.</small>                       |             |           |
| <small>CS - for sloped ceiling applications.)</small>                           |             |           |
| Surface Mount                                                                   | SM          | _____     |
| <b>Factory Options</b>                                                          |             |           |
| Black Cord                                                                      | BKCD        | _____     |
| Emergency Circuit*                                                              | _EC         | _____     |
| Emergency Battery Pack*                                                         | _EM         | _____     |
| <b>Finish</b>                                                                   |             |           |
| Black                                                                           | BK          | _____     |
| White                                                                           | WH          | _____     |
| <b>Length</b>                                                                   |             |           |
| Specify luminaire/row length in 1' increments                                   | X'          | _____     |

### QS QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** 4' minimum length, maximum of 3 locations.  
See cut sheet ordering guide for emergency option ordering details.

# SEEM 4 LED



| Seem 4 LED Pop-Down                                                                                                                                                                                                               |             | FSM4LS |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|--------|
| Shielding: 0.5" Pop-Down Lens                                                                                                                                                                                                     | —           | PD05   |
| Lumen Output                                                                                                                                                                                                                      |             |        |
| 275 Lumens per foot                                                                                                                                                                                                               | 275LF       |        |
| 375 Lumens per foot                                                                                                                                                                                                               | 375LF       |        |
| 625 Lumens per foot                                                                                                                                                                                                               | 625LF       |        |
| 875 Lumens per foot                                                                                                                                                                                                               | 875LF       |        |
| 1000 Lumens per foot                                                                                                                                                                                                              | 1000LF      |        |
| Color Temperature                                                                                                                                                                                                                 |             |        |
| 3000K, 80+ CRI                                                                                                                                                                                                                    | 30K         |        |
| 3500K, 80+ CRI or 90+ CRI                                                                                                                                                                                                         | 35K or 935K |        |
| 4000K, 80+ CRI                                                                                                                                                                                                                    | 40K         |        |
| Single Circuit                                                                                                                                                                                                                    | —           | 1C     |
| 120/277 UNV Voltage                                                                                                                                                                                                               | —           | UNV    |
| Control System & Dimming Level                                                                                                                                                                                                    |             |        |
| 0-10V - 1% Dimming                                                                                                                                                                                                                | L11         |        |
| 0-10V - 10% Dimming                                                                                                                                                                                                               | LD1         |        |
| Mounting                                                                                                                                                                                                                          |             |        |
| 24" Cable Suspension                                                                                                                                                                                                              | C24_        |        |
| 48" Cable Suspension                                                                                                                                                                                                              | C48_        |        |
| 96" Cable Suspension<br>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)<br>(Specify one of the following in place of "C"<br>J - for 2" canopies at non-feed locations.<br>CS - for sloped ceiling applications.) | C96_        |        |
| Surface Mount                                                                                                                                                                                                                     | SM          |        |
| Factory Options                                                                                                                                                                                                                   |             |        |
| Black Cord                                                                                                                                                                                                                        | BKCD        |        |
| Emergency Circuit*                                                                                                                                                                                                                | _EC         |        |
| Emergency Battery Pack*                                                                                                                                                                                                           | _EM         |        |
| Finish                                                                                                                                                                                                                            |             |        |
| Black                                                                                                                                                                                                                             | BK          |        |
| White                                                                                                                                                                                                                             | WH          |        |
| Length                                                                                                                                                                                                                            |             |        |
| Specify luminaire/row length in 1' increments                                                                                                                                                                                     | X'          |        |

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** 4' minimum length, maximum of 3 locations.  
See cut sheet ordering guide for emergency option ordering details.



| Seem 4 LED Wall Mount                                                 |             | FSM4LW |
|-----------------------------------------------------------------------|-------------|--------|
| Shielding: Flush Satin Lens                                           | —           | FL     |
| Lumen Output                                                          |             |        |
| 275 Lumens per foot                                                   | 275LF       |        |
| 375 Lumens per foot                                                   | 375LF       |        |
| 625 Lumens per foot                                                   | 625LF       |        |
| 875 Lumens per foot                                                   | 875LF       |        |
| 1000 Lumens per foot                                                  | 1000LF      |        |
| Color Temperature                                                     |             |        |
| 3000K, 80+ CRI                                                        | 30K         |        |
| 3500K, 80+ CRI or 90+ CRI                                             | 35K or 935K |        |
| 4000K, 80+ CRI                                                        | 40K         |        |
| Single Circuit                                                        | —           | 1C     |
| 120/277 UNV Voltage                                                   | —           | UNV    |
| Control System & Dimming Level                                        |             |        |
| 0-10V - 1% Dimming                                                    | L11         |        |
| 0-10V - 10% Dimming                                                   | LD1         |        |
| Wall Mount                                                            |             | WM     |
| Factory Options                                                       |             |        |
| Emergency Circuit*                                                    | EC          |        |
| Emergency Battery Pack*                                               | EM          |        |
| Finish                                                                |             |        |
| Black                                                                 | BK          |        |
| White                                                                 | WH          |        |
| Length                                                                |             |        |
| Specify luminaire/row length in 1' increments<br>(2' minimum length.) | X'          |        |

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** 4' minimum length, maximum of 3 locations.  
See cut sheet ordering guide for emergency option ordering details.




# SEEM<sup>®</sup> 4

DIRECT/INDIRECT & WALL MOUNT



# SEEM 4 LED

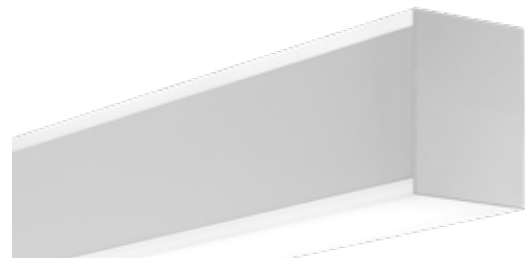

| Seem 4 Direct/Indirect                                                                                                          | —           | FSM4BS     |
|---------------------------------------------------------------------------------------------------------------------------------|-------------|------------|
| <b>Shielding</b>                                                                                                                |             |            |
| Batwing optic top / Batwing lens bottom                                                                                         | BWBW        |            |
| Batwing optic top / Flush lens bottom                                                                                           | BWFL        |            |
| Batwing optic top / 0.5" Pop-down bottom                                                                                        | BWPD05      |            |
| Flush lens top / Batwing lens bottom                                                                                            | FLBW        |            |
| Flush lens top / Flush lens bottom                                                                                              | FLFL        |            |
| 0.5" Pop-up top / Batwing lens bottom                                                                                           | PUBW        |            |
| 0.5" Pop-up top / Flush lens bottom                                                                                             | PUFL        |            |
| 0.5" Pop-up top / 0.5" Pop-down bottom                                                                                          | PUPD05      |            |
| <b>Direct Distribution</b>                                                                                                      |             |            |
| (875 Lumens per foot maximum for xxPD05.)                                                                                       |             |            |
| 275 Lumens per foot                                                                                                             | 275DN       |            |
| 375 Lumens per foot                                                                                                             | 375DN       |            |
| 625 Lumens per foot                                                                                                             | 625DN       |            |
| 875 Lumens per foot                                                                                                             | 875DN       |            |
| 1000 Lumens per foot                                                                                                            | 1000DN      |            |
| 1125 Lumens per foot                                                                                                            | 1125DN      |            |
| 1250 Lumens per foot                                                                                                            | 1250DN      |            |
| <b>Indirect Distribution</b>                                                                                                    |             |            |
| (1000 Lumens per foot maximum for xxPD05.)                                                                                      |             |            |
| 275 Lumens per foot                                                                                                             | 275UP       |            |
| 375 Lumens per foot                                                                                                             | 375UP       |            |
| 625 Lumens per foot                                                                                                             | 625UP       |            |
| 875 Lumens per foot                                                                                                             | 875UP       |            |
| 1000 Lumens per foot                                                                                                            | 1000UP      |            |
| 1125 Lumens per foot                                                                                                            | 1125UP      |            |
| 1250 Lumens per foot                                                                                                            | 1250UP      |            |
| <b>Color Temperature</b>                                                                                                        |             |            |
| 3000K, 80+ CRI                                                                                                                  | 30K         |            |
| 3500K, 80+ CRI or 90+ CRI                                                                                                       | 35K or 935K |            |
| 4000K, 80+ CRI                                                                                                                  | 40K         |            |
| <b>Single Circuit</b>                                                                                                           |             |            |
| Single Circuit                                                                                                                  | 1C          |            |
| Dual Circuit                                                                                                                    | 2C          |            |
| (Multiple feeds required for 0-10V drivers)                                                                                     |             |            |
| <b>120/277 UNV Voltage</b>                                                                                                      |             |            |
| —                                                                                                                               |             | <b>UNV</b> |
| <b>Control System &amp; Dimming Level</b>                                                                                       |             |            |
| 0-10V - 1% Dimming                                                                                                              | L11         |            |
| 0-10V - 10% Dimming                                                                                                             | LD1         |            |
| <b>Mounting</b>                                                                                                                 |             |            |
| 24" Cable Suspension                                                                                                            | C24__       |            |
| 48" Cable Suspension                                                                                                            | C48__       |            |
| 96" Cable Suspension                                                                                                            | C96__       |            |
| (Specify canopy color White (WH) or Black (BK). Example: C24WH.)                                                                |             |            |
| (Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.) |             |            |
| <b>Factory Options</b>                                                                                                          |             |            |
| Black Cord                                                                                                                      | BKCD        |            |
| Emergency Circuit*                                                                                                              | EC          |            |
| Emergency Battery Pack*                                                                                                         | EM          |            |
| <b>Finish</b>                                                                                                                   |             |            |
| Black                                                                                                                           | BK          |            |
| White                                                                                                                           | WH          |            |
| <b>Length</b>                                                                                                                   |             |            |
| Specify luminaire/row length in 1' increments                                                                                   | X'          |            |

| Seem 4 Direct/Indirect Wall Mount             | —           | FSM4BW     |
|-----------------------------------------------|-------------|------------|
| <b>Shielding</b>                              |             |            |
| Flush lens top / Flush lens bottom            | FLFL        |            |
| 0.5" Pop-up top / Flush lens bottom           | PUFL        |            |
| 0.5" Pop-up top / 0.5" Pop-down bottom        | PUPD05      |            |
| <b>Direct Distribution</b>                    |             |            |
| 275 Lumens per foot                           | 275DN       |            |
| 375 Lumens per foot                           | 375DN       |            |
| 625 Lumens per foot                           | 625DN       |            |
| 875 Lumens per foot                           | 875DN       |            |
| 1000 Lumens per foot                          | 1000DN      |            |
| (FLFL & PUFL only.)                           |             |            |
| 1250 Lumens per foot                          | 1250DN      |            |
| (FLFL only.)                                  |             |            |
| <b>Indirect Distribution</b>                  |             |            |
| 275 Lumens per foot                           | 275UP       |            |
| 375 Lumens per foot                           | 375UP       |            |
| 625 Lumens per foot                           | 625UP       |            |
| 875 Lumens per foot                           | 875UP       |            |
| 1000 Lumens per foot                          | 1000UP      |            |
| (FLFL & PUFL only.)                           |             |            |
| 1250 Lumens per foot                          | 1250UP      |            |
| (FLFL only.)                                  |             |            |
| <b>Color Temperature</b>                      |             |            |
| 3000K, 80+ CRI                                | 30K         |            |
| 3500K, 80+ CRI or 90+ CRI                     | 35K or 935K |            |
| 4000K, 80+ CRI                                | 40K         |            |
| <b>Single Circuit</b>                         |             |            |
| Single Circuit                                | 1C          |            |
| Dual Circuit                                  | 2C          |            |
| (Multiple feeds required for 0-10V drivers)   |             |            |
| <b>120/277 UNV Voltage</b>                    |             |            |
| —                                             |             | <b>UNV</b> |
| <b>Control System &amp; Dimming Level</b>     |             |            |
| 0-10V - 1% Dimming                            | L11         |            |
| 0-10V - 10% Dimming                           | LD1         |            |
| <b>Wall Mount</b>                             |             |            |
| —                                             |             | <b>WM</b>  |
| <b>Factory Options</b>                        |             |            |
| Emergency Circuit*                            | EC          |            |
| Emergency Battery Pack*                       | EM          |            |
| <b>Finish</b>                                 |             |            |
| Black                                         | BK          |            |
| White                                         | WH          |            |
| <b>Length</b>                                 |             |            |
| Specify luminaire/row length in 1' increments | X'          |            |

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** 8' lengths or longer. 4' illuminated area. See cut sheet ordering guide for emergency option ordering details.

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** 8' lengths or longer. 4' illuminated area. See cut sheet ordering guide for emergency option ordering details.



# SEEM® 4 RECESSED



| Seem 4 LED                                                                                                                                                                | —            | FSM4L          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------------|
| <b>Shielding</b>                                                                                                                                                          |              |                |
| Batwing Lens                                                                                                                                                              | BW           |                |
| Flush Satin Lens                                                                                                                                                          | FL           |                |
| Regress Lens                                                                                                                                                              | SR           |                |
| Regress High Performance Lens                                                                                                                                             | SRXP         |                |
| <b>Lumen Output</b>                                                                                                                                                       |              |                |
| 275 Lumens per foot                                                                                                                                                       | 275LF        |                |
| 375 Lumens per foot                                                                                                                                                       | 375LF        |                |
| 625 Lumens per foot                                                                                                                                                       | 625LF        |                |
| 875 Lumens per foot                                                                                                                                                       | 875LF        |                |
| 1000 Lumens per foot                                                                                                                                                      | 1000LF       |                |
| 1125 Lumens per foot                                                                                                                                                      | 1125LF       |                |
| 1250 Lumens per foot                                                                                                                                                      | 1250LF       |                |
| <b>Color Temperature</b>                                                                                                                                                  |              |                |
| 3000K, 80+ CRI                                                                                                                                                            | 30K          |                |
| 3500K, 80+ CRI or 90+ CRI                                                                                                                                                 | 35K or 935K  |                |
| 4000K, 80+ CRI                                                                                                                                                            | 40K          |                |
| <b>Single Circuit</b>                                                                                                                                                     |              | <b>1C</b>      |
| <b>120/277 UNV Voltage</b>                                                                                                                                                |              | <b>UNV</b>     |
| <b>Control System &amp; Dimming Level</b>                                                                                                                                 |              |                |
| 0-10V - 1% Dimming                                                                                                                                                        | L11          |                |
| 0-10V - 10% Dimming                                                                                                                                                       | LD1          |                |
| <b>Mounting</b>                                                                                                                                                           |              |                |
| Standard 15/16" Lay-in                                                                                                                                                    | G1           |                |
| Standard 15/16" Tegular                                                                                                                                                   | T1           |                |
| Standard 9/16" Lay-in                                                                                                                                                     | G2           |                |
| Standard 9/16" Tegular                                                                                                                                                    | T2           |                |
| 9/16" Slot-tee Tegular                                                                                                                                                    | G3           |                |
| Tall 15/16" Lay-in                                                                                                                                                        | G4           |                |
| Tall 15/16" Tegular                                                                                                                                                       | T4           |                |
| Tall 9/16" Lay-in                                                                                                                                                         | G5           |                |
| Tall 9/16" Tegular                                                                                                                                                        | T5           |                |
| Node 9/16" Tegular                                                                                                                                                        | T6           |                |
| <b>Factory Options</b>                                                                                                                                                    |              |                |
| Chicago Plenum                                                                                                                                                            | CP           |                |
| Emergency Circuit*                                                                                                                                                        | _EC          |                |
| Emergency Battery Pack*                                                                                                                                                   | _EM          |                |
| 6' New York City Flex Whip (120V)                                                                                                                                         | FN1          |                |
| 6' New York City Flex Whip (277V)                                                                                                                                         | FN2          |                |
| 6' Flex Whip                                                                                                                                                              | FW           |                |
| <b>Finish: Matte White Housing</b>                                                                                                                                        | —            | <b>WH</b>      |
| <b>Length</b>                                                                                                                                                             |              |                |
| Specify luminaire/row length in 1" increments<br>(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.) | _ft. _in.    | <b>ft. in.</b> |
| <b>Pattern</b><br>(3' minimum length)                                                                                                                                     |              |                |
| 'L' Pattern                                                                                                                                                               | A' x B'      |                |
| 'U' Pattern                                                                                                                                                               | A' x B' x C' |                |
| Rectangle Pattern                                                                                                                                                         | A' x B' R    |                |

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length. 48' maximum per pattern section.

**\*EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.






# SEEM 4 LED



| Seem 4 LED                                                                                                                                                                      | —            | FSM4L          |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|----------------|
| <b>Shielding</b>                                                                                                                                                                |              |                |
| Batwing Lens                                                                                                                                                                    | BW           |                |
| Flush Satin Lens                                                                                                                                                                | FL           |                |
| Regress Lens                                                                                                                                                                    | SR           |                |
| (Ceiling applications only)                                                                                                                                                     |              |                |
| Regress High Performance Lens                                                                                                                                                   | SRXP         |                |
| (Ceiling applications only)                                                                                                                                                     |              |                |
| <b>Lumen Output</b>                                                                                                                                                             |              |                |
| 275 Lumens per foot                                                                                                                                                             | 275LF        |                |
| 375 Lumens per foot                                                                                                                                                             | 375LF        |                |
| 625 Lumens per foot                                                                                                                                                             | 625LF        |                |
| 875 Lumens per foot                                                                                                                                                             | 875LF        |                |
| 1000 Lumens per foot                                                                                                                                                            | 1000LF       |                |
| 1125 Lumens per foot                                                                                                                                                            | 1125LF       |                |
| 1250 Lumens per foot                                                                                                                                                            | 1250LF       |                |
| <b>Color Temperature</b>                                                                                                                                                        |              |                |
| 3000K, 80+ CRI                                                                                                                                                                  | 30K          |                |
| 3500K, 80+ CRI or 90+ CRI                                                                                                                                                       | 35K or 935K  |                |
| 4000K, 80+ CRI                                                                                                                                                                  | 40K          |                |
| <b>Single Circuit</b>                                                                                                                                                           |              |                |
| —                                                                                                                                                                               | —            | <b>1C</b>      |
| <b>120/277 UNV Voltage</b>                                                                                                                                                      |              |                |
| —                                                                                                                                                                               | —            | <b>UNV</b>     |
| <b>Control System &amp; Dimming Level</b>                                                                                                                                       |              |                |
| 0-10V - 1% Dimming                                                                                                                                                              | L11          |                |
| 0-10V - 10% Dimming                                                                                                                                                             | LD1          |                |
| <b>Mounting</b>                                                                                                                                                                 |              |                |
| Trim Flange Drywall                                                                                                                                                             | TF           |                |
| Trim Flange Wood                                                                                                                                                                | TFW          |                |
| Mud-in Trimless, pre-set for 1/2" Drywall                                                                                                                                       | XF1          |                |
| Mud-in Trimless, pre-set for 5/8" Drywall                                                                                                                                       | XF2          |                |
| Mud-in Trimless, set thickness in field<br>(Mounting equipment assembled in field)                                                                                              | XFF          |                |
| Non-Drywall Hard Surface                                                                                                                                                        | XFN          |                |
| Hard Surface, Wood                                                                                                                                                              | XFW          |                |
| <b>Factory Options</b>                                                                                                                                                          |              |                |
| Chicago Plenum                                                                                                                                                                  | CP           |                |
| Emergency Circuit*                                                                                                                                                              | _EC          |                |
| Emergency Battery Pack*                                                                                                                                                         | _EM          |                |
| 6' New York City Flex Whip (120V)                                                                                                                                               | FNY1         |                |
| 6' New York City Flex Whip (277V)                                                                                                                                               | FNY2         |                |
| 6' Flex Whip                                                                                                                                                                    | FW           |                |
| <b>Finish: Matte White Housing</b>                                                                                                                                              |              |                |
| —                                                                                                                                                                               | —            | <b>WH</b>      |
| <b>Length</b>                                                                                                                                                                   |              |                |
| Specify luminaire/row<br>length in 1" increments<br>(2' minimum length, lengths are nominal, 1" increments based<br>on T-centers. Housing length is 1" shorter than specified.) | _ft. _in.    | <b>ft. in.</b> |
| <b>Pattern</b><br>(3' minimum length)                                                                                                                                           |              |                |
| 'L' Pattern                                                                                                                                                                     | A' x B'      |                |
| 'U' Pattern                                                                                                                                                                     | A' x B' x C' |                |
| Rectangle Pattern                                                                                                                                                               | A' x B' R    |                |

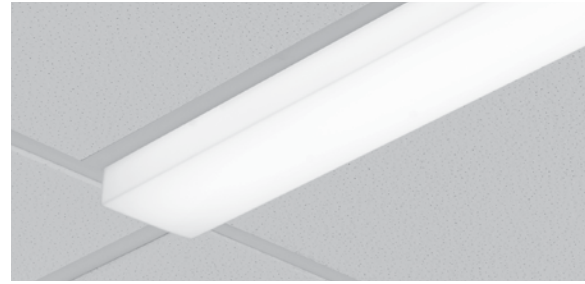

| Seem 4 LED Pop-down Lens                                                           | —           | FSM4L       |
|------------------------------------------------------------------------------------|-------------|-------------|
| <b>Shielding: 0.5" Pop-down Lens</b>                                               | —           | <b>PD05</b> |
| <b>Lumen Output</b>                                                                |             |             |
| 275 Lumens per foot                                                                | 275LF       |             |
| 375 Lumens per foot                                                                | 375LF       |             |
| 625 Lumens per foot                                                                | 625LF       |             |
| 750 Lumens per foot                                                                | 750LF       |             |
| <b>Color Temperature</b>                                                           |             |             |
| 3000K, 80+ CRI                                                                     | 30K         |             |
| 3500K, 80+ CRI or 90+ CRI                                                          | 35K or 935K |             |
| 4000K, 80+ CRI                                                                     | 40K         |             |
| <b>Single Circuit</b>                                                              |             |             |
| —                                                                                  | —           | <b>1C</b>   |
| <b>120/277 UNV Voltage</b>                                                         |             |             |
| —                                                                                  | —           | <b>UNV</b>  |
| <b>Control System &amp; Dimming Level</b>                                          |             |             |
| 0-10V - 1% Dimming                                                                 | L11         |             |
| 0-10V - 10% Dimming                                                                | LD1         |             |
| <b>Mounting</b>                                                                    |             |             |
| Standard 15/16" Lay-in                                                             | G1          |             |
| Standard 15/16" Tegular                                                            | T1          |             |
| Standard 9/16" Lay-in                                                              | G2          |             |
| Standard 9/16" Tegular                                                             | T2          |             |
| 9/16" Slot-tee Tegular                                                             | G3          |             |
| Tall 15/16" Lay-in                                                                 | G4          |             |
| Tall 15/16" Tegular                                                                | T4          |             |
| Tall 9/16" Lay-in                                                                  | G5          |             |
| Tall 9/16" Tegular                                                                 | T5          |             |
| Node 9/16" Tegular                                                                 | T6          |             |
| Trim Flange Drywall                                                                | TF          |             |
| Trim Flange Wood                                                                   | TFW         |             |
| Mud-in Trimless, pre-set for 1/2" Drywall                                          | XF1         |             |
| Mud-in Trimless, pre-set for 5/8" Drywall                                          | XF2         |             |
| Mud-in Trimless, set thickness in field<br>(Mounting equipment assembled in field) | XFF         |             |
| Non-Drywall Hard Surface                                                           | XFN         |             |
| Hard Surface, Wood                                                                 | XFW         |             |
| <b>Factory Options</b>                                                             |             |             |
| Chicago Plenum                                                                     | CP          |             |
| Emergency Circuit*                                                                 | EC          |             |
| Emergency Battery Pack*                                                            | EM          |             |
| 6' New York City Flex Whip (120V)                                                  | FNY1        |             |
| 6' New York City Flex Whip (277V)                                                  | FNY2        |             |
| 6' Flex Whip                                                                       | FW          |             |
| <b>Finish: Matte White Housing</b>                                                 |             |             |
| —                                                                                  | —           | <b>WH</b>   |
| <b>Length</b>                                                                      |             |             |
| Specify luminaire/row<br>length in 1" increments<br>(2' minimum length.)           | X'          |             |

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length. 48' maximum per pattern section.

**\*EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length. 48' maximum per pattern section.

**\*EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

# SEEM<sup>®</sup> 4-LP



# SEEM 4-LP LED

|                                           |                    |                |
|-------------------------------------------|--------------------|----------------|
| <b>Seem 4-LP LED</b>                      | —                  | <b>FSM4LP</b>  |
| <b>Shielding: Flush Lens</b>              | —                  | <b>FL</b>      |
| <b>Lumen Output</b>                       |                    |                |
| 275 Lumens per foot                       | 275LF              |                |
| 375 Lumens per foot                       | 375LF              |                |
| 625 Lumens per foot                       | 625LF              |                |
| 875 Lumens per foot                       | 875LF              |                |
| 1000 Lumens per foot                      | 1000LF             |                |
| <b>Color Temperature</b>                  |                    |                |
| 3000K, 80+ CRI                            | 30K                |                |
| 3500K, 80+ CRI <b>or</b> 90+ CRI          | 35K <b>or</b> 935K |                |
| 4000K, 80+ CRI                            | 40K                |                |
| <b>Single Circuit</b>                     | —                  | <b>1C</b>      |
| <b>120/277 UNV Voltage</b>                | —                  | <b>UNV</b>     |
| <b>Control System &amp; Dimming Level</b> |                    |                |
| 0-10V - 1% Dimming                        | L11                |                |
| 0-10V - 10% Dimming                       | LD1                |                |
| <b>Mounting</b>                           |                    |                |
| Standard 15/16" Lay-in                    | G1                 |                |
| Standard 15/16" Tegular                   | T1                 |                |
| Standard 9/16" Lay-in                     | G2                 |                |
| Standard 9/16" Tegular                    | T2                 |                |
| 9/16" Slot-tee Tegular                    | G3                 |                |
| Tall 15/16" Lay-in                        | G4                 |                |
| Tall 15/16" Tegular                       | T4                 |                |
| Tall 9/16" Lay-in                         | G5                 |                |
| Tall 9/16" Tegular                        | T5                 |                |
| Node 9/16" Tegular                        | T6                 |                |
| <b>Factory Options</b>                    |                    |                |
| Chicago Plenum                            | CP                 |                |
| Emergency Circuit*                        | _EC                |                |
| Emergency Battery Pack*                   | _EM                |                |
| 6' New York City Flex Whip (120V)         | FNY1               |                |
| 6' New York City Flex Whip (277V)         | FNY2               |                |
| 6' Flex Whip                              | FW                 |                |
| <b>Finish: Matte White Housing</b>        | —                  | <b>WH</b>      |
| <b>Length</b>                             |                    | <b>ft. in.</b> |
| 2'                                        |                    |                |
| 2' 6"                                     |                    |                |
| 3'                                        |                    |                |
| 4'                                        |                    |                |
| 5'                                        |                    |                |
| 6'                                        |                    |                |
| 7'                                        |                    |                |
| 7' 6"                                     |                    |                |
| 8'                                        |                    |                |

Specify luminaire/row length in 6" increments (8' minimum length) \_ft. \_in.

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** 4' minimum length, maximum of 3 locations.  
See cut sheet ordering guide for emergency option ordering details.






# SEM<sup>®</sup> 6

## RECESSED



# SEEM 6 LED

| Seem 6 LED                                                                                                                                                                   | —                  | FSM6L     |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------|-----------|
| <b>Shielding</b>                                                                                                                                                             |                    |           |
| Batwing Lens                                                                                                                                                                 | BW                 | _____     |
| Flush Satin Lens                                                                                                                                                             | FL                 | _____     |
| Regressed Lens<br>(Ceiling applications only)                                                                                                                                | SR                 | _____     |
| Regressed High Performance Lens<br>(Ceiling applications only)                                                                                                               | SRXP               | _____     |
| <b>Lumen Output</b>                                                                                                                                                          |                    |           |
| 375 Lumens per foot                                                                                                                                                          | 375LF              | _____     |
| 625 Lumens per foot                                                                                                                                                          | 625LF              | _____     |
| 875 Lumens per foot                                                                                                                                                          | 875LF              | _____     |
| 1000 Lumens per foot                                                                                                                                                         | 1000LF             | _____     |
| 1125 Lumens per foot                                                                                                                                                         | 1125LF             | _____     |
| 1250 Lumens per foot                                                                                                                                                         | 1250LF             | _____     |
| <b>Color Temperature</b>                                                                                                                                                     |                    |           |
| 3000K, 80+ CRI                                                                                                                                                               | 30K                | _____     |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                                                                                                                             | 35K <b>or</b> 935K | _____     |
| 4000K, 80+ CRI                                                                                                                                                               | 40K                | _____     |
| <b>Single Circuit</b>                                                                                                                                                        |                    |           |
| 120/277 UNV Voltage                                                                                                                                                          | —                  | <b>1C</b> |
| <b>Control System &amp; Dimming Level</b>                                                                                                                                    |                    |           |
| 0-10V - 1% Dimming                                                                                                                                                           | L11                | _____     |
| 0-10V - 10% Dimming                                                                                                                                                          | LD1                | _____     |
| <b>Mounting</b>                                                                                                                                                              |                    |           |
| Standard 15/16" Lay-in                                                                                                                                                       | G1                 | _____     |
| Standard 15/16" Tegular                                                                                                                                                      | T1                 | _____     |
| Standard 9/16" Lay-in                                                                                                                                                        | G2                 | _____     |
| Standard 9/16" Tegular                                                                                                                                                       | T2                 | _____     |
| 9/16" Slot-tee Tegular                                                                                                                                                       | G3                 | _____     |
| Tall 15/16" Lay-in                                                                                                                                                           | G4                 | _____     |
| Tall 15/16" Tegular                                                                                                                                                          | T4                 | _____     |
| Tall 9/16" Lay-in                                                                                                                                                            | G5                 | _____     |
| Tall 9/16" Tegular                                                                                                                                                           | T5                 | _____     |
| Node 9/16" Tegular                                                                                                                                                           | T6                 | _____     |
| Trim Flange Drywall                                                                                                                                                          | TF                 | _____     |
| Trim Flange Wood                                                                                                                                                             | TFW                | _____     |
| Mud-in Trimless, pre-set for 1/2" Drywall                                                                                                                                    | XF1                | _____     |
| Mud-in Trimless, pre-set for 5/8" Drywall                                                                                                                                    | XF2                | _____     |
| Mud-in Trimless, set thickness in field<br>(Mounting equipment assembled in field)                                                                                           | XFF                | _____     |
| Non-Drywall Hard Surface                                                                                                                                                     | XFN                | _____     |
| Hard Surface, Wood                                                                                                                                                           | XFW                | _____     |
| <b>Factory Options</b>                                                                                                                                                       |                    |           |
| Chicago Plenum                                                                                                                                                               | CP                 | _____     |
| Emergency Circuit*                                                                                                                                                           | _EC                | _____     |
| Emergency Battery Pack*                                                                                                                                                      | _EM                | _____     |
| 6' New York City Flex Whip (120V)                                                                                                                                            | FNY1               | _____     |
| 6' New York City Flex Whip (277V)                                                                                                                                            | FNY2               | _____     |
| 6' Flex Whip                                                                                                                                                                 | FW                 | _____     |
| <b>Finish: Matte White Housing</b>                                                                                                                                           |                    |           |
| <b>Length</b>                                                                                                                                                                |                    |           |
| Specify luminaire/row length in 1" increments<br>(2' minimum length, lengths are nominal, 1" increments based on<br>T-centers. Housing length is 1" shorter than specified.) | _ft. _in.          | _____     |
| <b>Pattern</b><br>(3' minimum length)                                                                                                                                        |                    |           |
| 'L' Pattern                                                                                                                                                                  | A' x B'            | _____     |
| 'U' Pattern                                                                                                                                                                  | A' x B' x C'       | _____     |
| Rectangle Pattern                                                                                                                                                            | A' x B' R          | _____     |

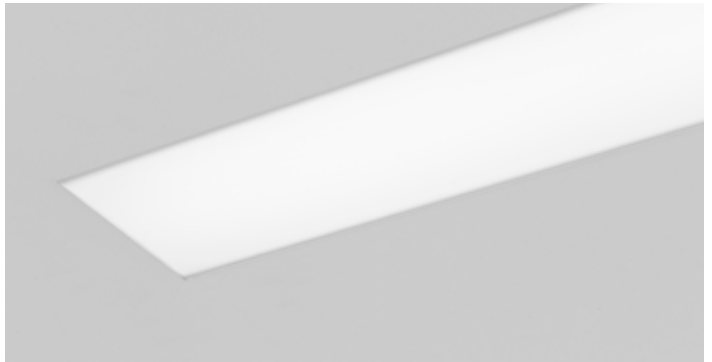

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length. 48' maximum per pattern section.  
**\*EC & EM:** 4' minimum length, maximum of 3 locations.  
 See cut sheet ordering guide for emergency option  
 ordering details.




# AVENUE® 6 LED





# AVENUE 6 LED

| Avenue 6 LED                                     | —      | FAV6L      |
|--------------------------------------------------|--------|------------|
| <b>Shielding</b>                                 |        |            |
| Corrugated Regressed Trim Frosted Lens           | CR     |            |
| Solid Regressed Trim Frosted Lens                | SR     |            |
| Flush Frosted Lens                               | FL     |            |
| <b>Lumen Output</b>                              |        |            |
| 375 Lumens per foot                              | 375LF  |            |
| 625 Lumens per foot                              | 625LF  |            |
| 875 Lumens per foot                              | 875LF  |            |
| 1000 Lumens per foot                             | 1000LF |            |
| <b>Color Temperature</b>                         |        |            |
| 3000K, 80+ CRI                                   | 30K    |            |
| 3500K, 80+ CRI                                   | 35K    |            |
| 4000K, 80+ CRI                                   | 40K    |            |
| <b>Single Circuit</b>                            |        |            |
| —                                                | —      | <b>1C</b>  |
| <b>120/277 UNV Voltage</b>                       |        |            |
| —                                                | —      | <b>UNV</b> |
| <b>Control System &amp; Dimming Level</b>        |        |            |
| 0-10V - 1% Dimming                               | L11    |            |
| 0-10V - 10% Dimming                              | LD1    |            |
| <b>Mounting</b>                                  |        |            |
| Drywall Flange                                   | F      |            |
| Standard 15/16" Lay-in                           | G1     |            |
| Standard 15/16" Tegular                          | T1     |            |
| Standard 9/16" Lay-in                            | G2     |            |
| Standard 9/16" Tegular                           | T2     |            |
| 9/16" Slot-tee Tegular                           | G3     |            |
| Tall 15/16" Lay-in                               | G4     |            |
| 9/16" Slot-tee Tegular                           | G3     |            |
| Tall 15/16" Lay-in                               | G4     |            |
| Tall 9/16" Tegular                               | T5     |            |
| Node 9/16" Tegular                               | T6     |            |
| <b>Factory Options</b>                           |        |            |
| Chicago Plenum                                   | CP     |            |
| Emergency Battery Pack with Integral Test Switch | EM     |            |
| 6' New York City Flex Whip (120V)                | FNY1   |            |
| 6' New York City Flex Whip (277V)                | FNY2   |            |
| 6' Flex Whip                                     | FW     |            |
| <b>Finish: Matte White Housing</b>               |        |            |
| —                                                | —      | <b>WH</b>  |
| <b>Length: 4' Nominal Housing</b>                |        |            |
| —                                                | —      | <b>4</b>   |

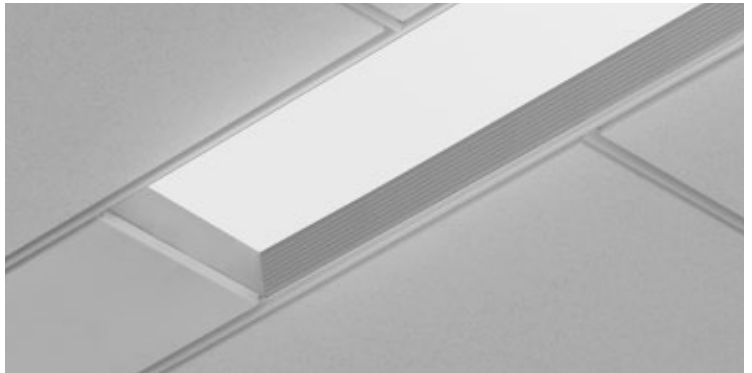

**QS QUICKSHIP TERMS**  
10 DAY: 100 pieces or less



# TWELVE LED

| Twelve LED                                | —      | FTWLS      |
|-------------------------------------------|--------|------------|
| <b>Shielding</b>                          |        |            |
| Acrylic Diffuser                          | AC     |            |
| MicroGlow Prismatic Lens                  | MG     |            |
| <b>Lumen Output</b>                       |        |            |
| 750 Lumens per foot                       | 750LF  |            |
| 875 Lumens per foot                       | 875LF  |            |
| 1000 Lumens per foot                      | 1000LF |            |
| 1125 Lumens per foot                      | 1125LF |            |
| 1250 Lumens per foot                      | 1250LF |            |
| <b>Color Temperature</b>                  |        |            |
| 3000K, 80+ CRI                            | 30K    |            |
| 3500K, 80+ CRI                            | 35K    |            |
| 4000K, 80+ CRI                            | 40K    |            |
| <b>Single Circuit</b>                     | —      | <b>1C</b>  |
| <b>120/277 UNV Voltage</b>                | —      | <b>UNV</b> |
| <b>Control System &amp; Dimming Level</b> |        |            |
| 0-10V - 1% Dimming                        | L11    |            |
| 0-10V - 10% Dimming                       | LD1    |            |
| <b>Mounting</b>                           |        |            |
| 12" Cable Suspension                      | J12    |            |
| 24" Cable Suspension                      | J24    |            |
| 48" Cable Suspension                      | J48    |            |
| 96" Cable Suspension                      | J96    |            |
| <b>Factory Options</b>                    |        |            |
| Dust Cover                                | DST    |            |
| Emergency Circuit*                        | _EC    |            |
| Emergency Battery Pack*                   | _EM    |            |
| <b>Finish</b>                             |        |            |
| Titanium Silver                           | TS     |            |
| Matte White Housing                       | WH     |            |
| <b>Length</b>                             |        |            |
| 4'                                        | 4'     |            |
| 8'                                        | 8'     |            |
| 12' (8'+4')                               | 12'    |            |
| 16' (8'+8')                               | 16'    |            |
| 20' (8'+4'+8')                            | 20'    |            |
| 24' (8'+8'+8')                            | 24'    |            |

(Longer run lengths available in 4' increments.)



## **QS** QUICKSHIP TERMS

**10 DAY:** 400' total length

**\*EC & EM:** Maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.



# SEEM<sup>®</sup>2

PERIMETER



# SEEM 2 LED PERIMETER

| Seem 2 LED Perimeter                                                                                                                                                       | —                                                                    | FSM2PR          |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|-----------------|
| <b>Housing Type</b>                                                                                                                                                        |                                                                      |                 |
| Adjustable Lit Housing<br>(Allows for +/- 3" adjustment to overall run length.<br>3' minimum luminaire length.)                                                            | ALH                                                                  | _____           |
| Fixed Housing                                                                                                                                                              | FXH                                                                  | _____           |
| <b>Shielding</b>                                                                                                                                                           |                                                                      |                 |
| Flush Lens<br>(Not available with Unlit Sliding Sleeves - SSB)                                                                                                             | FL0                                                                  | _____           |
| 2.5" Regress                                                                                                                                                               | FL2                                                                  | _____           |
| 4.0" Regress                                                                                                                                                               | FL4                                                                  | _____           |
| 2.5" Regress Grazer                                                                                                                                                        | GR2                                                                  | _____           |
| 4.0" Regress Grazer                                                                                                                                                        | GR4                                                                  | _____           |
| Flush Asymmetric Room Fill<br>(Not available with Unlit Sliding Sleeves - SSB)                                                                                             | AF0                                                                  | _____           |
| <b>Lumen Output</b>                                                                                                                                                        |                                                                      |                 |
| 125 Lumens per foot<br>(LD1 & L11 only, 4' minimum.)                                                                                                                       | 125LF                                                                | _____           |
| 250 Lumens per foot                                                                                                                                                        | 250LF                                                                | _____           |
| 375 Lumens per foot                                                                                                                                                        | 375LF                                                                | _____           |
| 625 Lumens per foot                                                                                                                                                        | 625LF                                                                | _____           |
| <b>Color Temperature</b>                                                                                                                                                   |                                                                      |                 |
| 3000K, 80+ CRI                                                                                                                                                             | 30K                                                                  | _____           |
| 3500K, 80+ CRI or 90+ CRI                                                                                                                                                  | 35K or 935K                                                          | _____           |
| 4000K, 80+ CRI                                                                                                                                                             | 40K                                                                  | _____           |
| <b>Circuit - Single Circuit</b>                                                                                                                                            | —                                                                    | <b>1C</b>       |
| <b>Voltage - 120/277 UNV Volt</b>                                                                                                                                          | —                                                                    | <b>UNV</b>      |
| <b>Control System &amp; Dimming Level</b>                                                                                                                                  |                                                                      |                 |
| 0-10V - 10% Dimming                                                                                                                                                        | LD1                                                                  | _____           |
| 0-10V - 1% Dimming                                                                                                                                                         | L11                                                                  | _____           |
| <b>Mounting</b>                                                                                                                                                            |                                                                      |                 |
| Lay-in Grid                                                                                                                                                                | G                                                                    | _____           |
| Flush<br>(FL0 & AF0)                                                                                                                                                       | Slot Tee / Tegalur<br>Trim Flange Drywall<br>Mud-in Trimless Drywall | ST<br>TF<br>XFF |
| Regressed<br>(FL2, FL4,<br>GR2 & GR4)                                                                                                                                      | Grid<br>Trimless Drywall                                             | G<br>XF         |
| <b>Factory Options</b>                                                                                                                                                     |                                                                      |                 |
| Chicago Plenum<br>(Not available with Flex Whip)                                                                                                                           | CP                                                                   | _____           |
| Emergency Circuit*                                                                                                                                                         | _EC                                                                  | _____           |
| Emergency Battery Pack*                                                                                                                                                    | _EM                                                                  | _____           |
| 6' New York City Flex Whip (120V)                                                                                                                                          | FN1                                                                  | _____           |
| 6' New York City Flex Whip (277V)                                                                                                                                          | FN2                                                                  | _____           |
| 6' Flex Whip                                                                                                                                                               | FW                                                                   | _____           |
| Fixed Housing with Unlit Sliding Sleeves<br>(Set of two unlit 12" sleeves. Fixed housing in straight runs only.<br>FL2, FL4, GR2 & GR4 only, 3' minimum luminaire length.) | SSB                                                                  | _____           |
| <b>Finish - Matte White Housing</b>                                                                                                                                        | —                                                                    | <b>WH</b>       |
| <b>Luminaire Length</b>                                                                                                                                                    |                                                                      |                 |
| Specify luminaire/row length in 1" increments<br>(2' minimum length)                                                                                                       | _ft _in                                                              | <b>ft in</b>    |


## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** 4' minimum length, not available at corners,  
maximum of 3 locations. See cut sheet ordering  
guide for emergency option ordering details.



Standard Lens

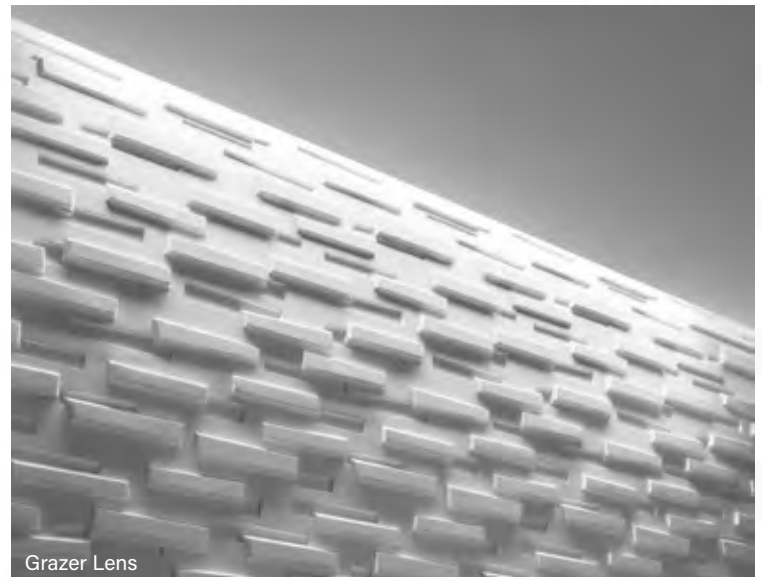

Grazer Lens



# SEEM<sup>®</sup> 4

PERIMETER

You More.

**CNA**

We can show you more.






# SEEM 4 LED PERIMETER

| Seem 4 LED Perimeter                                                                                                                                                                           |                         | —   | FSM4PR       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-----|--------------|
| <b>Housing Type</b>                                                                                                                                                                            |                         |     |              |
| Adjustable Lit Housing<br><small>(Allows for +/- 3" adjustment to overall run length.<br/>3' minimum luminaire length.)</small>                                                                | ALH                     |     |              |
| Fixed Housing                                                                                                                                                                                  | FXH                     |     |              |
| <b>Shielding</b>                                                                                                                                                                               |                         |     |              |
| Flush Lens*                                                                                                                                                                                    | FL0                     |     |              |
| 2.5" Regress                                                                                                                                                                                   | FL2                     |     |              |
| 4.0" Regress                                                                                                                                                                                   | FL4                     |     |              |
| Flush Grazer*                                                                                                                                                                                  | GR0                     |     |              |
| 2.5" Regress Grazer                                                                                                                                                                            | GR2                     |     |              |
| 4.0" Regress Grazer                                                                                                                                                                            | GR4                     |     |              |
| Flush Asymmetric Room Fill*<br><small>*(Not available with Unlit Sliding Sleeves - SSB)</small>                                                                                                | AF0                     |     |              |
| <b>Lumen Output</b>                                                                                                                                                                            |                         |     |              |
| 275 Lumens per foot                                                                                                                                                                            | 275LF                   |     |              |
| 375 Lumens per foot                                                                                                                                                                            | 375LF                   |     |              |
| 625 Lumens per foot                                                                                                                                                                            | 625LF                   |     |              |
| 875 Lumens per foot                                                                                                                                                                            | 875LF                   |     |              |
| 1000 Lumens per foot                                                                                                                                                                           | 1000LF                  |     |              |
| <b>Color Temperature</b>                                                                                                                                                                       |                         |     |              |
| 3000K, 80+ CRI                                                                                                                                                                                 | 30K                     |     |              |
| 3500K, 80+ CRI or 90+ CRI                                                                                                                                                                      | 35K or 935K             |     |              |
| 4000K, 80+ CRI                                                                                                                                                                                 | 40K                     |     |              |
| <b>Circuit - Single Circuit</b>                                                                                                                                                                |                         |     | <b>1C</b>    |
| <b>Voltage - 120/277 UNV Volt</b>                                                                                                                                                              |                         |     | <b>UNV</b>   |
| <b>Control System &amp; Dimming Level</b>                                                                                                                                                      |                         |     |              |
| 0-10V - 10% Dimming                                                                                                                                                                            | LD1                     |     |              |
| 0-10V - 1% Dimming                                                                                                                                                                             | L11                     |     |              |
| <b>Mounting</b>                                                                                                                                                                                |                         |     |              |
| Lay-in Grid                                                                                                                                                                                    | G                       |     |              |
| Flush<br>(FL0, GR0<br>& AF0)                                                                                                                                                                   | Slot Tee / Tegular      | ST  |              |
|                                                                                                                                                                                                | Trim Flange Drywall     | TF  |              |
|                                                                                                                                                                                                | Mud-in Trimless Drywall | XFF |              |
| Regressed<br>(FL2, FL4,<br>GR2 & GR4)                                                                                                                                                          | Grid                    | G   |              |
|                                                                                                                                                                                                | Trimless Drywall        | XF  |              |
| <b>Factory Options</b>                                                                                                                                                                         |                         |     |              |
| Chicago Plenum                                                                                                                                                                                 | CP                      |     |              |
| Emergency Circuit*                                                                                                                                                                             | _EC                     |     |              |
| Emergency Battery Pack*                                                                                                                                                                        | _EM                     |     |              |
| 6' New York City Flex Whip (120V)                                                                                                                                                              | FNY1                    |     |              |
| 6' New York City Flex Whip (277V)                                                                                                                                                              | FNY2                    |     |              |
| 6' Flex Whip                                                                                                                                                                                   | FW                      |     |              |
| Fixed Housing with Unlit Sliding Sleeves<br><small>(Set of two unlit 12" sleeves. Fixed housing in straight runs only.<br/>FL2, FL4, GR2 &amp; GR4 only. 3' minimum luminaire length.)</small> | SSB                     |     |              |
| <b>Finish - Matte White Housing</b>                                                                                                                                                            |                         |     | <b>WH</b>    |
| <b>Luminaire Length</b>                                                                                                                                                                        |                         |     |              |
| Specify luminaire/row length in 1" increments<br><small>(2' minimum length)</small>                                                                                                            | _ft _in                 |     | <b>ft in</b> |



Standard Lens

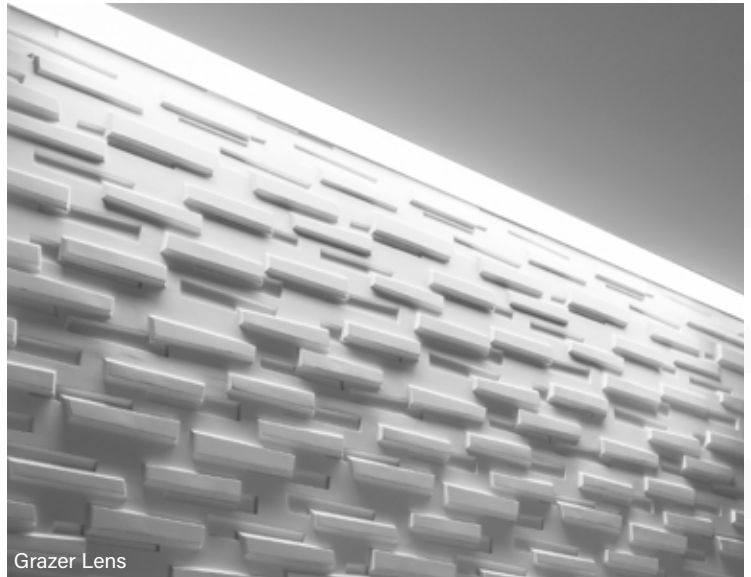

Grazer Lens

## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** 4' minimum length, not available at corners, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.


# COVERT LITE®



# COVERT LITE



|                                                                                  |       |       |
|----------------------------------------------------------------------------------|-------|-------|
| Covert Lite                                                                      | —     | FCOLT |
| Profile: Horizontal Fixed                                                        | —     | HF    |
| Lumen Output                                                                     |       |       |
| 500 Lumen                                                                        | 500L  |       |
| 750 Lumen                                                                        | 750L  |       |
| 1000 Lumen                                                                       | 1000L |       |
| 1200 Lumens                                                                      | 1200L |       |
| Color Temperature                                                                |       |       |
| 3000K, 80+ CRI                                                                   | 30K   |       |
| 3500K, 80+ CRI                                                                   | 35K   |       |
| 4000K, 80+ CRI                                                                   | 40K   |       |
| Single Circuit                                                                   | —     | 1C    |
| 120/277 UNV Voltage                                                              | —     | UNV   |
| Control System & Dimming Level                                                   |       |       |
| 0-10V - 1% Dimming                                                               | L11   |       |
| 0-10V - 10% Dimming                                                              | LD1   |       |
| Mounting: Cove                                                                   | —     | CV    |
| Factory Options                                                                  |       |       |
| Emergency Circuit                                                                | _EC   |       |
| (See EC Guide for default locations and ordering details.)                       |       |       |
| Finish: No Finish                                                                | —     | NF    |
| Length                                                                           |       |       |
| Specify luminaire/row length in 1' increments                                    | X'    |       |
| (2' minimum length. Each feed location increases overall luminaire length by 1') |       |       |

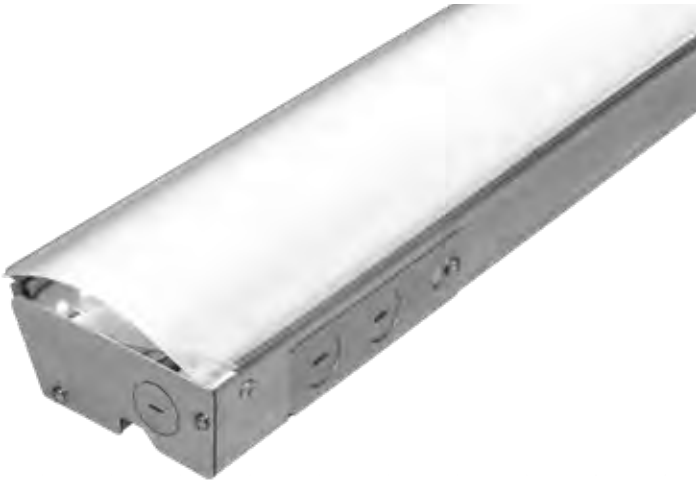

## QS QUICKSHIP TERMS

10 DAY: 400' total length





# FOCUS

## WALL WASH

# FOCUS WALL WASH

|                                                                                                 |       |                |
|-------------------------------------------------------------------------------------------------|-------|----------------|
| <b>Focus Wall Wash</b>                                                                          | —     | <b>FWSL</b>    |
| <b>Shielding: Frosted Lens</b>                                                                  | —     | <b>FL</b>      |
| <b>Lumen Output</b>                                                                             |       |                |
| 250 Lumens per foot                                                                             | 250LF |                |
| 450 Lumens per foot                                                                             | 450LF |                |
| 650 Lumens per foot                                                                             | 650LF |                |
| 800 Lumens per foot                                                                             | 800LF |                |
| 950 Lumens per foot                                                                             | 950LF |                |
| <b>Color Temperature</b>                                                                        |       |                |
| 3000K, 80+ CRI                                                                                  | 30K   |                |
| 3500K, 80+ CRI                                                                                  | 35K   |                |
| 4000K, 80+ CRI                                                                                  | 40K   |                |
| <b>Single Circuit</b>                                                                           | —     | <b>1C</b>      |
| <b>120/277 UNV Voltage</b>                                                                      | —     | <b>UNV</b>     |
| <b>Control System &amp; Dimming Level</b>                                                       |       |                |
| 0-10V - 1% Dimming                                                                              | L11   |                |
| 0-10V - 10% Dimming                                                                             | LD1   |                |
| <b>Mounting: Universal</b>                                                                      | —     | <b>U</b>       |
| <b>Factory Options</b>                                                                          |       |                |
| Air Return                                                                                      | AR    |                |
| Chicago Plenum                                                                                  | CP    |                |
| Flanged Ends                                                                                    | FL    |                |
| <b>Finish: Matte White Housing</b>                                                              | —     | <b>WH</b>      |
| <b>Length</b>                                                                                   |       | <b>ft. in.</b> |
| Specify luminaire/row length in 1" increments_ft. _in.                                          |       |                |
| <small>(2' minimum length. Each feed location increases overall luminaire length by 1')</small> |       |                |



## **QS** QUICKSHIP TERMS



**10 DAY:** 400' total length

# AERION<sup>®</sup> LED



\*not all features are available for Quickship



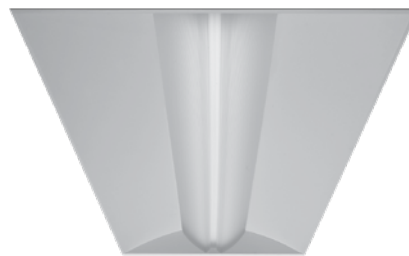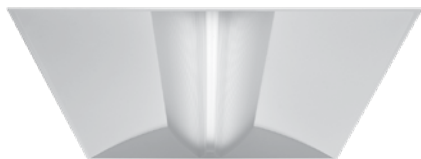

| Aerion LED                     |                                                  | FARL   |
|--------------------------------|--------------------------------------------------|--------|
| Nominal Size: 2' x 2'          |                                                  | 22     |
| Shielding: Acrylic Diffuser    |                                                  | AC     |
| Lumen Output                   |                                                  |        |
| Standard                       | 2000 Lumens                                      | 2000L  |
|                                | 2500 Lumens                                      | 2500L  |
|                                | 3000 Lumens                                      | 3000L  |
| High Efficiency                | 2500 Lumens                                      | 2500LH |
|                                | 3000 Lumens                                      | 3000LH |
|                                | 3500 Lumens                                      | 3500LH |
|                                | 4000 Lumens                                      | 4000LH |
| Color Temperature              |                                                  |        |
|                                | 3000K, 80+ CRI                                   | 30K    |
|                                | 3500K, 80+ CRI                                   | 35K    |
|                                | 4000K, 80+ CRI                                   | 40K    |
| Single Circuit                 |                                                  | 1C     |
| Voltage                        |                                                  |        |
|                                | 120 Volt                                         | 120    |
|                                | 277 Volt                                         | 277    |
|                                | UNV Volt                                         | UNV    |
| Control System & Dimming Level |                                                  |        |
|                                | 0-10V - 1% Dimming                               | L11    |
|                                | 0-10V - 10% Dimming                              | LD1    |
| Mounting                       |                                                  |        |
|                                | 15/16" Grid                                      | G1     |
|                                | 9/16" Grid                                       | G2     |
|                                | 9/16" Slot Tee                                   | G3     |
|                                | Drywall Frame Kit                                | F      |
| Factory Options                |                                                  |        |
|                                | Air Return                                       | AR     |
|                                | Chicago Plenum                                   | CP     |
|                                | Emergency Battery Pack with Integral Test Switch | EM     |
|                                | 6' Flex Whip                                     | FW     |
| Finish: Matte Satin White      |                                                  | WH     |

| Aerion LED                     |                                                  | FARL   |
|--------------------------------|--------------------------------------------------|--------|
| Nominal Size: 2' x 4'          |                                                  | 24     |
| Shielding: Acrylic Diffuser    |                                                  | AC     |
| Lumen Output                   |                                                  |        |
| Standard                       | 4000 Lumens                                      | 4000L  |
|                                | 4500 Lumens                                      | 4500L  |
|                                | 5000 Lumens                                      | 5000L  |
|                                | 5500 Lumens                                      | 5500L  |
| High Efficiency                | 4000 Lumens                                      | 4000LH |
|                                | 4500 Lumens                                      | 4500LH |
|                                | 5000 Lumens                                      | 5000LH |
|                                | 5500 Lumens                                      | 5500LH |
|                                | 6000 Lumens                                      | 6000LH |
| Color Temperature              |                                                  |        |
|                                | 3000K, 80+ CRI                                   | 30K    |
|                                | 3500K, 80+ CRI                                   | 35K    |
|                                | 4000K, 80+ CRI                                   | 40K    |
| Single Circuit                 |                                                  | 1C     |
| Voltage                        |                                                  |        |
|                                | 120 Volt                                         | 120    |
|                                | 277 Volt                                         | 277    |
|                                | UNV Volt                                         | UNV    |
| Control System & Dimming Level |                                                  |        |
|                                | 0-10V - 1% Dimming                               | L11    |
|                                | 0-10V - 10% Dimming                              | LD1    |
| Mounting                       |                                                  |        |
|                                | 15/16" Grid                                      | G1     |
|                                | 9/16" Grid                                       | G2     |
|                                | 9/16" Slot Tee                                   | G3     |
|                                | Drywall Frame Kit                                | F      |
| Factory Options                |                                                  |        |
|                                | Air Return                                       | AR     |
|                                | Chicago Plenum                                   | CP     |
|                                | Emergency Battery Pack with Integral Test Switch | EM     |
|                                | 6' Flex Whip                                     | FW     |
| Finish: Matte Satin White      |                                                  | WH     |

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less


# AMICA<sup>®</sup> 2



\*not all features are available for Quickship

# AMICA 2

**Q5&10**  
DAY  
Configurations

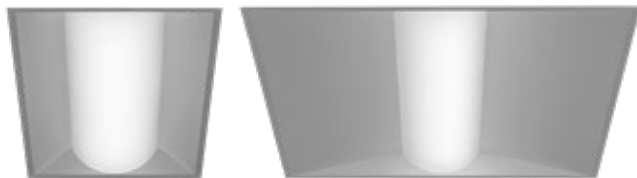

|                 | Amica 2                                                               | —      | FAM2       |
|-----------------|-----------------------------------------------------------------------|--------|------------|
|                 | <b>Nominal Size</b>                                                   |        |            |
|                 | 1' x 2'                                                               | 12     |            |
|                 | 2' x 2'                                                               | 22     |            |
|                 | <b>Shielding: Ribbed Acrylic Diffuser</b>                             | —      | <b>ACR</b> |
|                 | <b>Lumen Output</b>                                                   |        |            |
| Standard        | 2000 Lumens                                                           | 2000L  |            |
|                 | 2500 Lumens                                                           | 2500L  |            |
|                 | 3000 Lumens                                                           | 3000L  |            |
|                 | 3500 Lumens                                                           | 3500L  |            |
|                 | 4000 Lumens                                                           | 4000L  |            |
| High Efficiency | 2000 Lumens                                                           | 2000LH |            |
|                 | 2500 Lumens                                                           | 2500LH |            |
|                 | 3000 Lumens                                                           | 3000LH |            |
|                 | 3500 Lumens                                                           | 3500LH |            |
|                 | 4000 Lumens                                                           | 4000LH |            |
|                 | <b>Color Temperature</b>                                              |        |            |
|                 | 3000K, 80+ CRI                                                        | 30K    |            |
|                 | 3500K, 80+ CRI                                                        | 35K    |            |
|                 | 4000K, 80+ CRI                                                        | 40K    |            |
|                 | <b>Single Circuit</b>                                                 | —      | <b>1C</b>  |
|                 | <b>120/277 UNV Voltage</b>                                            | —      | <b>UNV</b> |
|                 | <b>Control System &amp; Dimming Level</b>                             |        |            |
|                 | 0-10V - 1% Dimming                                                    | L11    |            |
|                 | 0-10V - 10% Dimming<br>(Not Right Light as standard, consult factory) | LD1    |            |
|                 | <b>Mounting</b>                                                       |        |            |
|                 | Grid                                                                  | G      |            |
|                 | Drywall Frame Kit                                                     | F      |            |
|                 | <b>Factory Options</b>                                                |        |            |
|                 | Air Return                                                            | AR     |            |
|                 | Chicago Plenum                                                        | CP     |            |
|                 | Emergency Battery Pack<br>with Integral Test Switch                   | EM     |            |
|                 | 6' Flex Whip                                                          | FW     |            |
|                 | <b>Finish: Matte White Finish</b>                                     | —      | <b>WH</b>  |

## QS QUICKSHIP TERMS

**5 DAY:** 100 pieces or less

**10 DAY:** 300 pieces or less

|                 | Amica 2                                                               | —      | FAM2       |
|-----------------|-----------------------------------------------------------------------|--------|------------|
|                 | <b>Nominal Size</b>                                                   |        |            |
|                 | 1' x 4'                                                               | 14     |            |
|                 | 2' x 4'                                                               | 24     |            |
|                 | <b>Shielding: Ribbed Acrylic Diffuser</b>                             | —      | <b>ACR</b> |
|                 | <b>Lumen Output</b>                                                   |        |            |
| Standard        | 4000 Lumens                                                           | 4000L  |            |
|                 | 4500 Lumens                                                           | 4500L  |            |
|                 | 5000 Lumens                                                           | 5000L  |            |
|                 | 5500 Lumens                                                           | 5500L  |            |
|                 | 6000 Lumens                                                           | 6000L  |            |
|                 | 6500 Lumens                                                           | 6500L  |            |
|                 | 7000 Lumens                                                           | 7000L  |            |
| High Efficiency | 7500 Lumens                                                           | 7500L  |            |
|                 | 4000 Lumens                                                           | 4000LH |            |
|                 | 4500 Lumens                                                           | 4500LH |            |
|                 | 5000 Lumens                                                           | 5000LH |            |
|                 | 5500 Lumens                                                           | 5500LH |            |
|                 | 6000 Lumens                                                           | 6000LH |            |
|                 | 6500 Lumens                                                           | 6500LH |            |
|                 | <b>Color Temperature</b>                                              |        |            |
|                 | 3000K, 80+ CRI                                                        | 30K    |            |
|                 | 3500K, 80+ CRI                                                        | 35K    |            |
|                 | 4000K, 80+ CRI                                                        | 40K    |            |
|                 | <b>Single Circuit</b>                                                 | —      | <b>1C</b>  |
|                 | <b>120/277 UNV Voltage</b>                                            | —      | <b>UNV</b> |
|                 | <b>Control System &amp; Dimming Level</b>                             |        |            |
|                 | 0-10V - 1% Dimming                                                    | L11    |            |
|                 | 0-10V - 10% Dimming<br>(Not Right Light as standard, consult factory) | LD1    |            |
|                 | <b>Mounting</b>                                                       |        |            |
|                 | Grid                                                                  | G      |            |
|                 | Drywall Frame Kit                                                     | F      |            |
|                 | <b>Factory Options</b>                                                |        |            |
|                 | Air Return                                                            | AR     |            |
|                 | Chicago Plenum                                                        | CP     |            |
|                 | Emergency Battery Pack<br>with Integral Test Switch                   | EM     |            |
|                 | 6' Flex Whip                                                          | FW     |            |
|                 | <b>Finish: Matte White Finish</b>                                     | —      | <b>WH</b>  |

## QS QUICKSHIP TERMS

**5 DAY:** 100 pieces or less

**10 DAY:** 300 pieces or less



# AMICA<sup>®</sup> LED



\*not all features are available for Quickship



|                 | Amica LED                                           | —      | FAML       |
|-----------------|-----------------------------------------------------|--------|------------|
|                 | <b>Nominal Size: 2' x 2'</b>                        | —      | <b>22</b>  |
|                 | <b>Shielding: Ribbed Acrylic Diffuser</b>           | —      | <b>ACR</b> |
|                 | <b>Lumen Output</b>                                 |        |            |
| Standard        | 2000 Lumens                                         | 2000L  |            |
|                 | 2500 Lumens                                         | 2500L  |            |
|                 | 3000 Lumens                                         | 3000L  |            |
| High Efficiency | 2500 Lumens                                         | 2500LH |            |
|                 | 3000 Lumens                                         | 3000LH |            |
|                 | 3500 Lumens                                         | 3500LH |            |
|                 | 4000 Lumens                                         | 4000LH |            |
|                 | <b>Color Temperature</b>                            |        |            |
|                 | 3000K, 80+ CRI                                      | 30K    |            |
|                 | 3500K, 80+ CRI                                      | 35K    |            |
|                 | 4000K, 80+ CRI                                      | 40K    |            |
|                 | <b>Single Circuit</b>                               | —      | <b>1C</b>  |
|                 | <b>Voltage</b>                                      |        |            |
|                 | 120 Volt                                            | 120    |            |
|                 | 277 Volt                                            | 277    |            |
|                 | UNV Volt                                            | UNV    |            |
|                 | <b>Dimming Level: 0-10V - 10% Dimming</b>           | —      | <b>LD1</b> |
|                 | <b>Mounting</b>                                     |        |            |
|                 | 15/16" Grid                                         | G1     |            |
|                 | 9/16" Grid                                          | G2     |            |
|                 | 9/16" Slot Tee                                      | G3     |            |
|                 | Drywall Frame Kit                                   | F      |            |
|                 | <b>Factory Options</b>                              |        |            |
|                 | Air Return                                          | AR     |            |
|                 | Chicago Plenum                                      | CP     |            |
|                 | Emergency Battery Pack<br>with Integral Test Switch | EM     |            |
|                 | 6' Flex Whip                                        | FW     |            |
|                 | <b>Finish: Matte White Finish</b>                   | —      | <b>WH</b>  |

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less

**10 DAY:** 300 pieces or less



|                 | Amica LED                                           | —      | FAML       |
|-----------------|-----------------------------------------------------|--------|------------|
|                 | <b>Nominal Size: 2' x 4'</b>                        | —      | <b>24</b>  |
|                 | <b>Shielding: Ribbed Acrylic Diffuser</b>           | —      | <b>ACR</b> |
|                 | <b>Lumen Output</b>                                 |        |            |
| Standard        | 4000 Lumens                                         | 4000L  |            |
|                 | 4500 Lumens                                         | 4500L  |            |
|                 | 5000 Lumens                                         | 5000L  |            |
|                 | 5500 Lumens                                         | 5500L  |            |
| High Efficiency | 4000 Lumens                                         | 4000LH |            |
|                 | 4500 Lumens                                         | 4500LH |            |
|                 | 5000 Lumens                                         | 5000LH |            |
|                 | 5500 Lumens                                         | 5500LH |            |
|                 | <b>Color Temperature</b>                            |        |            |
|                 | 3000K, 80+ CRI                                      | 30K    |            |
|                 | 3500K, 80+ CRI                                      | 35K    |            |
|                 | 4000K, 80+ CRI                                      | 40K    |            |
|                 | <b>Single Circuit</b>                               | —      | <b>1C</b>  |
|                 | <b>Voltage</b>                                      |        |            |
|                 | 120 Volt                                            | 120    |            |
|                 | 277 Volt                                            | 277    |            |
|                 | UNV Volt                                            | UNV    |            |
|                 | <b>Dimming Level: 0-10V - 10% Dimming</b>           | —      | <b>LD1</b> |
|                 | <b>Mounting</b>                                     |        |            |
|                 | 15/16" Grid                                         | G1     |            |
|                 | 9/16" Grid                                          | G2     |            |
|                 | 9/16" Slot Tee                                      | G3     |            |
|                 | Drywall Frame Kit                                   | F      |            |
|                 | <b>Factory Options</b>                              |        |            |
|                 | Air Return                                          | AR     |            |
|                 | Chicago Plenum                                      | CP     |            |
|                 | Emergency Battery Pack<br>with Integral Test Switch | EM     |            |
|                 | 6' Flex Whip                                        | FW     |            |
|                 | <b>Finish: Matte White Finish</b>                   | —      | <b>WH</b>  |

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less

**10 DAY:** 300 pieces or less

# EQUATION<sup>®</sup> 2



| Equation 2                                                            | —                  | FEQ2       |
|-----------------------------------------------------------------------|--------------------|------------|
| <b>Nominal Size: 1' x 4'</b>                                          | —                  | <b>14</b>  |
| <b>Shielding</b>                                                      |                    |            |
| Opal Acrylic Lens                                                     | AC                 |            |
| MicroGlow Prismatic Lens                                              | MG                 |            |
| <b>Lumen Output</b>                                                   |                    |            |
| 2000 Lumens                                                           | 2000L              |            |
| 2500 Lumens                                                           | 2500L              |            |
| 3000 Lumens                                                           | 3000L              |            |
| 3500 Lumens                                                           | 3500L              |            |
| 4000 Lumens                                                           | 4000L              |            |
| 4500 Lumens                                                           | 4500L              |            |
| 5000 Lumens                                                           | 5000L              |            |
| <b>Color Temperature</b>                                              |                    |            |
| 3000K, 80+ CRI                                                        | 30K                |            |
| 3500K, 80+ CRI <b>or</b> 90+ CRI                                      | 35K <b>or</b> 935K |            |
| 4000K, 80+ CRI                                                        | 40K                |            |
| <b>Single Circuit</b>                                                 | —                  | <b>1C</b>  |
| <b>120/277 UNV Voltage</b>                                            | —                  | <b>UNV</b> |
| <b>Control System &amp; Dimming Level</b>                             |                    |            |
| 0-10V - 1% Dimming                                                    | L11                |            |
| 0-10V - 10% Dimming<br>(Not Right Light as standard, consult factory) | LD1                |            |
| <b>Mounting</b>                                                       |                    |            |
| 15/16" Grid                                                           | G1                 |            |
| 9/16" Grid                                                            | G2                 |            |
| Slot Tee                                                              | ST                 |            |
| Drywall Frame Kit                                                     | F                  |            |
| Surface Mount                                                         | SM                 |            |
| 24" Aircraft Cable                                                    | C24                |            |
| 48" Aircraft Cable                                                    | C48                |            |
| 96" Aircraft Cable                                                    | C96                |            |
| <b>Factory Options</b>                                                |                    |            |
| Air Return                                                            | AR                 |            |
| Chicago Plenum                                                        | CP                 |            |
| Emergency Battery Pack<br>with Integral Test Switch                   | EM                 |            |
| 6' New York City Flex Whip (120V)                                     | FNY1               |            |
| 6' New York City Flex Whip (277V)                                     | FNY2               |            |
| 6' Flex Whip                                                          | FW                 |            |
| <b>Finish: Matte White Finish</b>                                     | —                  | <b>WH</b>  |

## **QS** QUICKSHIP TERMS

**5 DAY:** 50 pieces or less

**10 DAY:** 150 pieces or less



\*not all features are available for Quickship



# EQUATION 2



| Equation 2                                                            |             | FEQ2        |
|-----------------------------------------------------------------------|-------------|-------------|
| Nominal Size: 2' x 2'                                                 |             | 22          |
| Shielding                                                             |             |             |
| Opal Acrylic Lens                                                     | AC          |             |
| MicroGlow Prismatic Lens                                              | MG          |             |
| Lumen Output                                                          |             |             |
| Standard                                                              | 2000 Lumens | 2000L       |
|                                                                       | 2500 Lumens | 2500L       |
|                                                                       | 3000 Lumens | 3000L       |
|                                                                       | 3500 Lumens | 3500L       |
| High Efficiency                                                       | 2500 Lumens | 2500LH      |
|                                                                       | 3000 Lumens | 3000LH      |
|                                                                       | 3500 Lumens | 3500LH      |
|                                                                       | 4000 Lumens | 4000LH      |
|                                                                       | 4500 Lumens | 4500LH      |
|                                                                       | 5000 Lumens | 5000LH      |
| Color Temperature                                                     |             |             |
| 3000K, 80+ CRI                                                        |             | 30K         |
| 3500K, 80+ CRI or 90+ CRI                                             |             | 35K or 935K |
| 4000K, 80+ CRI                                                        |             | 40K         |
| Single Circuit                                                        |             | 1C          |
| 120/277 UNV Voltage                                                   |             | UNV         |
| Control System & Dimming Level                                        |             |             |
| 0-10V - 1% Dimming                                                    |             | L11         |
| 0-10V - 10% Dimming<br>(Not Right Light as standard, consult factory) |             | LD1         |
| Mounting                                                              |             |             |
| 15/16" Grid                                                           | G1          |             |
| 9/16" Grid                                                            | G2          |             |
| Slot Tee                                                              | ST          |             |
| Drywall Frame Kit                                                     | F           |             |
| Surface Mount                                                         | SM          |             |
| 24" Aircraft Cable                                                    | C24         |             |
| 48" Aircraft Cable                                                    | C48         |             |
| 96" Aircraft Cable                                                    | C96         |             |
| Factory Options                                                       |             |             |
| Air Return                                                            | AR          |             |
| Chicago Plenum                                                        | CP          |             |
| Emergency Battery Pack<br>with Integral Test Switch                   | EM          |             |
| 6' New York City Flex Whip (120V)                                     | FNY1        |             |
| 6' New York City Flex Whip (277V)                                     | FNY2        |             |
| 6' Flex Whip                                                          | FW          |             |
| Finish: Matte White Finish                                            |             | WH          |

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less





| Equation 2                                                            |             | FEQ2        |
|-----------------------------------------------------------------------|-------------|-------------|
| Nominal Size: 2' x 4'                                                 |             | 24          |
| Shielding                                                             |             |             |
| Opal Acrylic Lens                                                     | AC          |             |
| MicroGlow Prismatic Lens                                              | MG          |             |
| Lumen Output                                                          |             |             |
| Standard                                                              | 4000 Lumens | 4000L       |
|                                                                       | 4500 Lumens | 4500L       |
|                                                                       | 5000 Lumens | 5000L       |
|                                                                       | 5500 Lumens | 5500L       |
| High Efficiency                                                       | 4000 Lumens | 4000LH      |
|                                                                       | 4500 Lumens | 4500LH      |
|                                                                       | 5000 Lumens | 5000LH      |
|                                                                       | 5500 Lumens | 5500LH      |
|                                                                       | 6000 Lumens | 6000LH      |
|                                                                       | 6500 Lumens | 6500LH      |
|                                                                       | 7000 Lumens | 7000LH      |
|                                                                       | 7500 Lumens | 7500LH      |
|                                                                       | 8000 Lumens | 8000LH      |
|                                                                       | 8500 Lumens | 8500LH      |
| Color Temperature                                                     |             |             |
| 3000K, 80+ CRI                                                        |             | 30K         |
| 3500K, 80+ CRI or 90+ CRI                                             |             | 35K or 935K |
| 4000K, 80+ CRI                                                        |             | 40K         |
| Single Circuit                                                        |             | 1C          |
| 120/277 UNV Voltage                                                   |             | UNV         |
| Control System & Dimming Level                                        |             |             |
| 0-10V - 1% Dimming                                                    |             | L11         |
| 0-10V - 10% Dimming<br>(Not Right Light as standard, consult factory) |             | LD1         |
| Mounting                                                              |             |             |
| 15/16" Grid                                                           | G1          |             |
| 9/16" Grid                                                            | G2          |             |
| Slot Tee                                                              | ST          |             |
| Drywall Frame Kit                                                     | F           |             |
| Surface Mount                                                         | SM          |             |
| 24" Aircraft Cable                                                    | C24         |             |
| 48" Aircraft Cable                                                    | C48         |             |
| 96" Aircraft Cable                                                    | C96         |             |
| Factory Options                                                       |             |             |
| Air Return                                                            | AR          |             |
| Chicago Plenum                                                        | CP          |             |
| Emergency Battery Pack<br>with Integral Test Switch                   | EM          |             |
| 6' New York City Flex Whip (120V)                                     | FNY1        |             |
| 6' New York City Flex Whip (277V)                                     | FNY2        |             |
| 6' Flex Whip                                                          | FW          |             |
| Finish: Matte White Finish                                            |             | WH          |

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less

# LUNA<sup>®</sup> LED



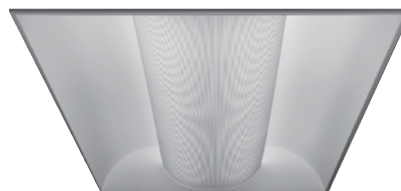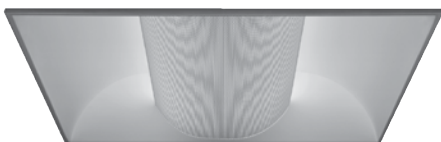

| Luna LED                        | —           | FLUL |
|---------------------------------|-------------|------|
| Nominal Size: 2' x 2'           | —           | 22   |
| Shielding: Perforated Shield    | —           | PS   |
| Lumen Output                    |             |      |
| 2000 Lumens                     | 2000L       |      |
| 2500 Lumens                     | 2500L       |      |
| 3000 Lumens                     | 3000L       |      |
| 3500 Lumens                     | 3500L       |      |
| 4000 Lumens<br>(LD1 & L11 only) | 4000L       |      |
| Color Temperature               |             |      |
| 3000K, 80+ CRI                  | 30K         |      |
| 3500K, 80+ CRI or 90+ CRI       | 35K or 935K |      |
| 4000K, 80+ CRI                  | 40K         |      |
| Single Circuit                  | —           | 1C   |
| 120/277 UNV Voltage             | —           | UNV  |
| Control System & Dimming Level  |             |      |
| 0-10V - 1% Dimming              | L11         |      |
| 0-10V - 10% Dimming             | LD1         |      |
| Mounting                        |             |      |
| Grid                            | G           |      |
| Slot Tee                        | ST          |      |
| Drywall Frame Kit               | F           |      |
| Factory Options                 |             |      |
| Air Return                      | AR          |      |
| Chicago Plenum                  | CP          |      |
| Emergency Battery               | B310        |      |
| Positional Clips                | EQ          |      |
| 6' Flex Whip                    | FW          |      |
| Finish: Matte White Finish      | —           | WH   |

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less

**10 DAY:** 300 pieces or less

| Luna LED                          | —           | FLUL |
|-----------------------------------|-------------|------|
| Nominal Size: 2' x 4'             | —           | 24   |
| Shielding: Perforated Shield      | —           | PS   |
| Lumen Output                      |             |      |
| 3000 Lumens*                      | 3000L       |      |
| 3500 Lumens*                      | 3500L       |      |
| 4000 Lumens                       | 4000L       |      |
| 4500 Lumens                       | 4500L       |      |
| 5000 Lumens                       | 5000L       |      |
| 5500 Lumens                       | 5500L       |      |
| 6000 Lumens*                      | 6000L       |      |
| 6500 Lumens*                      | 6500L       |      |
| 7000 Lumens*<br>(*LD1 & L11 only) | 7000L       |      |
| Color Temperature                 |             |      |
| 3000K, 80+ CRI                    | 30K         |      |
| 3500K, 80+ CRI or 90+ CRI         | 35K or 935K |      |
| 4000K, 80+ CRI                    | 40K         |      |
| Single Circuit                    | —           | 1C   |
| 120/277 UNV Voltage               | —           | UNV  |
| Control System & Dimming Level    |             |      |
| 0-10V - 1% Dimming                | L11         |      |
| 0-10V - 10% Dimming               | LD1         |      |
| Mounting                          |             |      |
| Grid                              | G           |      |
| Slot Tee                          | ST          |      |
| Drywall Frame Kit                 | F           |      |
| Factory Options                   |             |      |
| Air Return                        | AR          |      |
| Chicago Plenum                    | CP          |      |
| Emergency Battery                 | B310        |      |
| Positional Clips                  | EQ          |      |
| 6' Flex Whip                      | FW          |      |
| Finish: Matte White Finish        | —           | WH   |

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less

**10 DAY:** 300 pieces or less



# VEER<sup>®</sup> LED



| Veer LED                                                              | —     | FVRL      |
|-----------------------------------------------------------------------|-------|-----------|
| <b>Nominal Size: 1' x 4'</b>                                          | —     | <b>14</b> |
| <b>Shielding</b>                                                      |       |           |
| Radial Acrylic Diffuser                                               | ACR   |           |
| Flat Acrylic Diffuser                                                 | ACF   |           |
| Regress Acrylic Diffuser                                              | ACG   |           |
| <b>Lumen Output</b>                                                   |       |           |
| 2500 Lumens                                                           | 2500L |           |
| 3000 Lumens                                                           | 3000L |           |
| 3500 Lumens                                                           | 3500L |           |
| 4000 Lumens                                                           | 4000L |           |
| <b>Color Temperature</b>                                              |       |           |
| 3000K, 80+ CRI                                                        | 30K   |           |
| 3500K, 80+ CRI                                                        | 35K   |           |
| 4000K, 80+ CRI                                                        | 40K   |           |
| <b>Single Circuit</b>                                                 | —     | <b>1C</b> |
| <b>Voltage</b>                                                        |       |           |
| 120 Volt                                                              | 120   |           |
| 277 Volt                                                              | 277   |           |
| UNV Volt                                                              | UNV   |           |
| <b>Control System &amp; Dimming Level</b>                             |       |           |
| 0-10V - 1% Dimming                                                    | L11   |           |
| 0-10V - 10% Dimming<br>(Not Right Light as standard, consult factory) | LD1   |           |
| <b>Mounting</b>                                                       |       |           |
| Grid                                                                  | G     |           |
| Slot Tee                                                              | ST    |           |
| Drywall Frame Kit                                                     | F     |           |
| <b>Factory Options</b>                                                |       |           |
| Air Return                                                            | AR    |           |
| Chicago Plenum                                                        | CP    |           |
| Emergency Battery Pack<br>with Integral Test Switch                   | EM    |           |
| 6' Flex Whip                                                          | FW    |           |
| <b>Finish: Matte White Finish</b>                                     | —     | <b>WH</b> |

**QS** QUICKSHIP TERMS

**10 DAY:** 50 pieces or less



\*not all features are available for Quickship



|                                                                       | Veer LED    | —      | FVRL      |
|-----------------------------------------------------------------------|-------------|--------|-----------|
| <b>Nominal Size: 2' x 2'</b>                                          | —           |        | <b>22</b> |
| <b>Shielding</b>                                                      |             |        |           |
| Radial Acrylic Diffuser                                               | ACR         |        |           |
| Flat Acrylic Diffuser                                                 | ACF         |        |           |
| Regress Acrylic Diffuser                                              | ACG         |        |           |
| <b>Lumen Output</b>                                                   |             |        |           |
| Standard                                                              | 2000 Lumens | 2000L  |           |
|                                                                       | 2500 Lumens | 2500L  |           |
|                                                                       | 3000 Lumens | 3000L  |           |
| High Efficiency                                                       | 2500 Lumens | 2500LH |           |
|                                                                       | 3000 Lumens | 3000LH |           |
|                                                                       | 3500 Lumens | 3500LH |           |
|                                                                       | 4000 Lumens | 4000LH |           |
| <b>Color Temperature</b>                                              |             |        |           |
| 3000K, 80+ CRI                                                        | 30K         |        |           |
| 3500K, 80+ CRI                                                        | 35K         |        |           |
| 4000K, 80+ CRI                                                        | 40K         |        |           |
| <b>Single Circuit</b>                                                 | —           |        | <b>1C</b> |
| <b>Voltage</b>                                                        |             |        |           |
| 120 Volt                                                              | 120         |        |           |
| 277 Volt                                                              | 277         |        |           |
| UNV Volt                                                              | UNV         |        |           |
| <b>Control System &amp; Dimming Level</b>                             |             |        |           |
| 0-10V - 1% Dimming                                                    | L11         |        |           |
| 0-10V - 10% Dimming<br>(Not Right Light as standard, consult factory) | LD1         |        |           |
| <b>Mounting</b>                                                       |             |        |           |
| Grid                                                                  | G           |        |           |
| Slot Tee                                                              | ST          |        |           |
| Drywall Frame Kit                                                     | F           |        |           |
| <b>Factory Options</b>                                                |             |        |           |
| Air Return                                                            | AR          |        |           |
| Chicago Plenum                                                        | CP          |        |           |
| Emergency Battery Pack<br>with Integral Test Switch                   | EM          |        |           |
| 6' Flex Whip                                                          | FW          |        |           |
| <b>Finish: Matte White Finish</b>                                     | —           |        | <b>WH</b> |

**QS QUICKSHIP TERMS**

**10 DAY:** 100 pieces or less

|                                                                       | Veer LED    | —      | FVRL      |
|-----------------------------------------------------------------------|-------------|--------|-----------|
| <b>Nominal Size: 2' x 4'</b>                                          | —           |        | <b>24</b> |
| <b>Shielding</b>                                                      |             |        |           |
| Radial Acrylic Diffuser                                               | ACR         |        |           |
| Flat Acrylic Diffuser                                                 | ACF         |        |           |
| Regress Acrylic Diffuser                                              | ACG         |        |           |
| <b>Lumen Output</b>                                                   |             |        |           |
| Standard                                                              | 4000 Lumens | 4000L  |           |
|                                                                       | 4500 Lumens | 4500L  |           |
|                                                                       | 5000 Lumens | 5000L  |           |
|                                                                       | 5500 Lumens | 5500L  |           |
| High Efficiency                                                       | 4000 Lumens | 4000LH |           |
|                                                                       | 4500 Lumens | 4500LH |           |
|                                                                       | 5000 Lumens | 5000LH |           |
|                                                                       | 5500 Lumens | 5500LH |           |
|                                                                       | 6000 Lumens | 6000LH |           |
| <b>Color Temperature</b>                                              |             |        |           |
| 3000K, 80+ CRI                                                        | 30K         |        |           |
| 3500K, 80+ CRI                                                        | 35K         |        |           |
| 4000K, 80+ CRI                                                        | 40K         |        |           |
| <b>Single Circuit</b>                                                 | —           |        | <b>1C</b> |
| <b>Voltage</b>                                                        |             |        |           |
| 120 Volt                                                              | 120         |        |           |
| 277 Volt                                                              | 277         |        |           |
| UNV Volt                                                              | UNV         |        |           |
| <b>Control System &amp; Dimming Level</b>                             |             |        |           |
| 0-10V - 1% Dimming                                                    | L11         |        |           |
| 0-10V - 10% Dimming<br>(Not Right Light as standard, consult factory) | LD1         |        |           |
| <b>Mounting</b>                                                       |             |        |           |
| Grid                                                                  | G           |        |           |
| Slot Tee                                                              | ST          |        |           |
| Drywall Frame Kit                                                     | F           |        |           |
| <b>Factory Options</b>                                                |             |        |           |
| Air Return                                                            | AR          |        |           |
| Chicago Plenum                                                        | CP          |        |           |
| Emergency Battery Pack<br>with Integral Test Switch                   | EM          |        |           |
| 6' Flex Whip                                                          | FW          |        |           |
| <b>Finish: Matte White Finish</b>                                     | —           |        | <b>WH</b> |

**QS QUICKSHIP TERMS**

**10 DAY:** 100 pieces or less



# Quickship Guide

2-, 5- & 10-Day Configurations



**FOCAL POINT®**

Bringing It All To Light®



©2021 Focal Point LLC, 4141 S. Pulaski Road, Chicago, Illinois 60632  
[www.focalpointlights.com](http://www.focalpointlights.com), T 773.247.9494

All rights reserved. Focal Point, Bringing It All To Light, Aerion, Amica, Avenue, Covert Lite, Equation, ID+, Luna, Seem, Veer and the Light-Ray Graphic are trademarks or registered trademarks of Focal Point, LLC. Visit [focalpointlights.com](http://focalpointlights.com) for specifications and other details on our entire Focal Point catalog.