



Quickship Guide

5 & 10 DAY CONFIGURATIONS



FOCAL POINT®

Bringing It All To Light®



Quickship Policies

Quickship is a broad, made-to-order offering of architectural luminaires that support all main areas of a project. We leverage our vertical integration and on-site manufacturing capabilities to ship a wide variety of options in 5 and 10 days. Unlike a stock program, Quickship gives you the ability to satisfy tight project schedules without sacrificing quality or selection.

HOW TO USE THIS GUIDE

The product options included in this guide all qualify for Quickship. Simply complete a catalog number by selecting the options you require and clearly mark your order as Quickship for fast processing. For more information or an expanded list of options, please consult the individual product cut sheets at focalpointlights.com.

QUICKSHIP POLICIES

Quickship line items must be denoted as such to ship with the 5- or 10-day terms of the program whether an entire order is comprised of only Quickship items or it includes both Quickship and standard line items.

Items with different lead times will ship separately unless the order is marked as "SHIP COMPLETE". In that case, the entire order will ship with the longest lead time.

Estimated ship dates (ESD) are determined per the following example: If a clean order is received by 11:00am CST on Monday for a 5-day item, the ESD for that item will be the following Monday. Orders received after 11am will receive an ESD based on the following business day.

ORDER CHECKLIST

- ✔ Complete and correct catalog numbers
- ✔ **Quickship** clearly denoted in subject line of email and on PO
- ✔ Complete PO with proper terms
- ✔ Run lengths when required
- ✔ EM/EC locations and voltage when required

REMINDERS

All ship dates are estimated. 5- and 10-day lead times do not include weekends or holidays.

Consult factory for options or quantities not shown in this guide. Large quantities may not qualify for Quickship.

Partial shipments may be required based on current factory loads.

Change orders of any kind will affect lead time.

CONTRACTOR SUPPORT

With our Quickship program and a host of resources found in the Contractor Zone of our website, we support quick-turn and design-build projects from specification to installation.

Learn more at focalpointlights.com/contractorzone



Quickship Index



ACOUSTIC SOLUTIONS

Seem® 1 Acoustic Suspended & Direct/Indirect	4
Seem® 1 Acoustic Indirect & Unlit	6
AirCore® Blade Unlit Acoustic	8



ID+ DOWNLIGHTS & CYLINDERS

ID+ 3.5" Downlight & Wall Wash	10
ID+ 3.5" Trimless Downlight & Wall Wash	12
ID+ 3.5" x 3.5" Downlight & Wall Wash	14
ID+ 3.5" x 3.5" Trimless Downlight & Wall Wash	16
ID+ 4.5" Downlight & Wall Wash	18
ID+ 4.5" Trimless Downlight & Wall Wash	20
ID+ 4.5" x 4.5" Downlight & Wall Wash	22
ID+ 4.5" x 4.5" Trimless Downlight & Wall Wash	24
ID+ 3.5" Cylinders	26
ID+ 3.5" Pure Cylinders	28
ID+ 4.5" Cylinders	30



LINEAR

Seem® 1 Suspended / Direct/Indirect	32
Seem® 1 Recessed	34
Seem® 2 Suspended / Wall Mount	36
Seem® 2 Suspended / Wall Mount Direct/Indirect	38
Seem® 2 Recessed / Pop-Down	40
Seem® 4 Suspended / Pop-Down / Wall Mount	42
Seem® 4 Suspended / Wall Mount Direct/Indirect	44
Seem® 4 Recessed / Pop-Down	46
Seem® 4-LP	48
Seem® 6 Recessed	50



PERIMETER & COVE

Seem® 2 Perimeter / Grazer / Asymmetric Room Fill	52
Seem® 4 Perimeter / Grazer / Asymmetric Room Fill	54
Covert Lite®	56



ARCHITECTURAL TROFFERS

Aerion®	58
Amica® 2	60
Amica® LED	62
Equation® 2	64
Luna® LED	66
Veer® LED	68

FEATURE KEY





SEEM[®]1 ACOUSTIC

SUSPENDED & DIRECT/INDIRECT



SEEM 1 ACOUSTIC SUSPENDED & DIRECT/INDIRECT

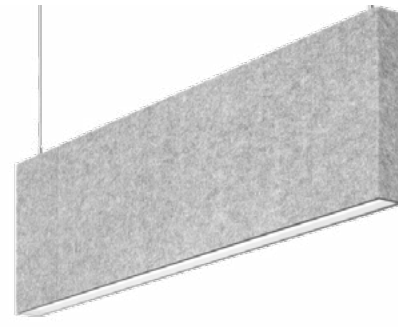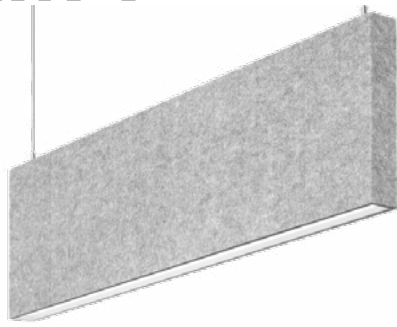

Seem 1 Acoustic	—	ASM1S
Shielding		
Asymmetric Wall Wash	AS	_____
Batwing Lens	BW	_____
Regress Lens	RL	_____
Luminaire Height		
(heights are nominal)		_____
8"	8	_____
12"	12	_____
16"	16	_____
Lumen Output		
100 Lumens per foot	100LF	_____
(4 minimum.)		_____
200 Lumens per foot	200LF	_____
300 Lumens per foot	300LF	_____
400 Lumens per foot	400LF	_____
500 Lumens per foot	500LF	_____
Color Temperature		
3000K, 80CRI	30K	_____
3500K, 80CRI	35K	_____
4000K, 80CRI	40K	_____
Circuits & Zones		
1 Circuit, non-emergency	1C	_____
Voltage		
120/277 UNV Volt	UNV	_____
Control System & Dimming Level		
0-10V - 10% Dimming	LD1	_____
0-10V - 1% Dimming	L11	_____
Mounting		
<u>Suspended</u>		
(Mounting hang kits ship with order. Power cable is 18" longer than suspension length. Consult factory for longer power cable lengths.)		_____
24" Cable Suspension	J24_	_____
48" Cable Suspension	J48_	_____
96" Cable Suspension	J96_	_____
120" Cable Suspension	J120_	_____
(Specify canopy color White (WH), Black (BK) or Titanium Silver (TS). Example: J24WH.)		_____
(Consult factory for sloped ceiling applications)		_____
<u>Surface Mounted</u>		
(30" power cable standard. Consult factory for longer power cable lengths.)		_____
Direct/Flush to Grid	DTG	_____
Direct/Flush to Strut	DTS	_____
Factory Options		
Black Cord	BKCD	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
Acoustic Panel Color		
See below for color offering		_____
Length		
4', 6', 8', 10', 12', 14', or 16'		_____
(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field)		_____

Seem 1 Acoustic Direct/Indirect	—	ASM1BS
Shielding		
Batwing Optic Top/Asymmetric Wall Wash Bottom	BWAS	_____
Batwing Optic Top/Batwing Lens Bottom	BWBW	_____
Batwing Optic Top/Regress Lens	BWRL	_____
Dust Cover Top/Asymmetric Wall Wash Bottom	DCAS	_____
Dust Cover Top/Batwing Lens Bottom	DCBW	_____
Dust Cover Top/Regress Lens	DCRL	_____
Luminaire Height		
(heights are nominal)		_____
8"	8	_____
12"	12	_____
16"	16	_____
Direct Distribution		
100 Lumens per foot	100DN	_____
200 Lumens per foot	200DN	_____
300 Lumens per foot	300DN	_____
400 Lumens per foot	400DN	_____
500 Lumens per foot	500DN	_____
Indirect Distribution		
125 Lumens per foot	125UP	_____
(Consult factory for Lutron & DALI)		_____
250 Lumens per foot	250UP	_____
375 Lumens per foot	375UP	_____
500 Lumens per foot	500UP	_____
625 Lumens per foot	625UP	_____
800 Lumens per foot	800UP	_____
Color Temperature		
3000K, 80CRI	30K	_____
3500K, 80CRI	35K	_____
4000K, 80CRI	40K	_____
Circuits & Zones		
1 Circuit, non-emergency	1C	_____
2 non-emergency circuits provide independent control of Direct and Indirect sources	2C	_____
Voltage		
120/277 UNV Volt	UNV	_____
Control System & Dimming Level		
0-10V - 10% Dimming	LD1	_____
0-10V - 1% Dimming	L11	_____
Mounting		
(Mounting hang kits ship with order. Power cable is 18" longer than suspension length. Consult factory for longer power cable lengths.)		_____
24" Cable Suspension	J24_	_____
48" Cable Suspension	J48_	_____
96" Cable Suspension	J96_	_____
120" Cable Suspension	J120_	_____
Factory Options		
Black Cord	BKCD	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
Acoustic Panel Color		
See below for color offering		_____
Length		
4', 6', 8', 10', 12', 14', or 16'		_____
(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field)		_____

QS QUICKSHIP TERMS

10 DAY: Maximum linear feet is 200' of acoustic products per order

***EC & EM:** Maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

QS QUICKSHIP TERMS

10 DAY: Maximum linear feet is 200' of acoustic products per order

***EC & EM:** Maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

ACOUSTIC MATERIAL COLORS



CHARCOAL GRAY **CHG**



SHADOW GRAY **SDG**



SILVER GRAY **SLG**



NATURAL LINEN **NTL**





CLASSIC WHITE **CWH**

SEEM[®] 1 ACOUSTIC

INDIRECT & UNLIT



SEEM 1 ACOUSTIC INDIRECT & UNLIT

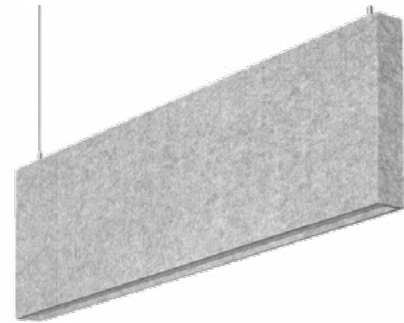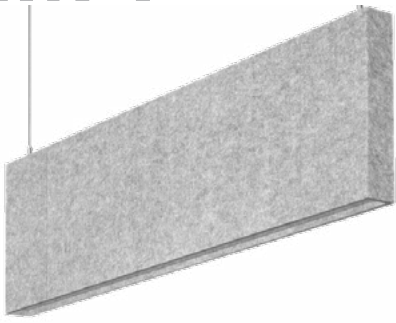

Seem 1 Acoustic Indirect		—	ASM1S
Shielding			
Batwing Top/Solid Bottom	BWSD		
Dust Cover Top/Solid Bottom	DCSD		
Luminaire Height			
<small>(heights are nominal)</small>			
8"	8		
12"	12		
16"	16		
Lumen Output			
125 Lumens per foot	125LF		
<small>(4' minimum.)</small>			
250 Lumens per foot	250LF		
375 Lumens per foot	375LF		
500 Lumens per foot	500LF		
625 Lumens per foot	625LF		
800 Lumens per foot	800LF		
Color Temperature			
3000K, 80CRI	30K		
3500K, 80CRI	35K		
4000K, 80CRI	40K		
Voltage			
120/277 UNV Volt	UNV		
Control System & Dimming Level			
0-10V - 10% Dimming	LD1		
0-10V - 1% Dimming	L11		
Mounting			
<small>(Mounting hang kits ship with order. Power cable is 18" longer than suspension length. Consult factory for longer power cable lengths.)</small>			
24" Cable Suspension	J24__		
48" Cable Suspension	J48__		
96" Cable Suspension	J96__		
120" Cable Suspension	J120__		
Factory Options			
Black Cord	BKCD		
Acoustic Panel Color			
See below for color offering			
Length			
4', 6', 8', 10', 12', 14', or 16'			
<small>(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field.)</small>			

Seem 1 Acoustic Unlit		—	AUSM1S
Shielding			
Solid Bottom	SD		
Baffle Height			
<small>(heights are nominal)</small>			
8"	8		
12"	12		
16"	16		
Mounting			
Suspended			
<small>(Mounting hang kits ship with order)</small>			
24" Cable Suspension	J24__		
48" Cable Suspension	J48__		
96" Cable Suspension	J96__		
Surface Mounted			
Direct/Flush to Grid	DTG		
Direct/Flush to Strut	DTS		
No Hardware	NH		
Acoustic Panel Color			
See below for color offering			
Baffle Length			
4', 6', 8', 10', 12', 14', or 16'			
<small>(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field.)</small>			

QS QUICKSHIP TERMS

10 DAY: Maximum linear feet is 200' of acoustic products per order

QS QUICKSHIP TERMS

10 DAY: Maximum linear feet is 200' of acoustic products per order

ACOUSTIC MATERIAL COLORS



CHARCOAL GRAY **CHG**



SHADOW GRAY **SDG**



SILVER GRAY **SLG**



NATURAL LINEN **NTL**



CLASSIC WHITE **CWH**

AIRCORE[®] BLADE


UNLIT ACOUSTIC



AIRCORE BLADE UNLIT ACOUSTIC



AirCore Blade	—	AUABS
Baffle Height (heights are nominal)		_____
8"	8	
12"	12	
16"	16	
Mounting		_____
<u>Suspended</u>		
(Mounting hang kits ship with order)		
24" Cable Suspension	J24__	
48" Cable Suspension	J48__	
96" Cable Suspension	J96__	
120" Cable Suspension	J120__	
(Specify canopy color White (WH), Black (BK) or Titanium Silver (TS). Example: J24WH.) (Consult factory for sloped ceiling applications)		
<u>Surface Mounted</u>		
Direct/Flush to Grid	DTG	
Direct/Flush to Strut	DTS	
No Hardware	NH	
Acoustic Panel Color See below for color offering		_____
Baffle Length 4', 6', or 8'		_____
(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field.)		

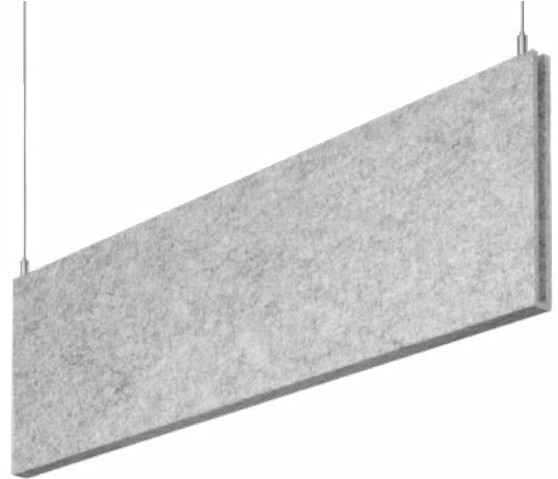

QS QUICKSHIP TERMS

10 DAY: Maximum linear feet is 200' of acoustic products per order

ACOUSTIC MATERIAL COLORS



10 + 3.5"

DOWNLIGHT & WALL WASH



ID+ 3.5" DOWNLIGHT & WALL WASH



Housing Ordering

ID+ 3.5" Downlight	—	FLC3D
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Voltage		
120/270 Volt <small>(IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC / Airtight	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	
Emergency Battery with Remote Test Switch <small>(T-rated housing only. Above ceiling access required.)</small>	EMR	

Trim & LED Module

Aperture: 3.5" Round Reflector	—	LC3
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output <small>(Trim & housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	DNT	
Short Cone with 60° cut-off	DNS	
Distribution		
Narrow Flood	NFL	
Flood1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Finish		
Clear Diffuse	CD	
White	WH	
Optional Flange Finish <small>(CD finish only. For matching finishes leave blank)</small>		
White Painted	WP	



Housing Ordering

ID+ 3.5" Wall Wash	—	FLC3W
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Voltage		
120/270 Volt <small>(IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	

Trim & LED Module

Aperture	—	LC3
3.5" Round Reflector	LC3	
3.5" Round Airtight Reflector	LC3AT	
Trim Type: Round Overlap	—	RO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output <small>(Trim & housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	WWT	
Short Cone with 60° cut-off	WWS	
Finish		
Clear Diffuse	CD	
White	WH	
Optional Flange Finish <small>(CD finish only. For matching finishes leave blank)</small>		
White Painted	WP	



5 DAY: 200 pieces or less



5 DAY: 100 pieces or less

ID+3.5"

EXIT

TRIMLESS DOWNLIGHT & WALL WASH



ID+ 3.5" TRIMLESS DOWNLIGHT & WALL WASH



Housing Ordering

ID+ 3.5" Downlight		FLC3D
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Voltage		
120/270 Volt <small>(IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC / Airtight	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	

Trim & LED Module

Aperture: 3.5" Round Reflector		LC3
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output <small>(Trim & housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	DNT	
Short Cone with 60° cut-off	DNS	
Distribution		
Narrow Flood	NFL	
Flood1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Finish		
Clear Diffuse	CD	
White	WH	

Housing Ordering

ID+ 3.5" Wall Wash		FLC3W
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Voltage		
120/270 Volt <small>(IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	

Trim & LED Module

Aperture		LC3
3.5" Round Reflector	LC3	
3.5" Round Airtight Reflector	LC3AT	
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output <small>(Trim & housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	WWT	
Short Cone with 60° cut-off	WWS	
Finish		
Clear Diffuse	CD	
White	WH	



5 DAY: 200 pieces or less



5 DAY: 100 pieces or less

10 + 3.5" X 3.5"

DOWNLIGHT & WALL WASH



ID+ 3.5" x 3.5" DOWNLIGHT & WALL WASH



Housing Ordering

ID+ 3.5"x3.5" Downlight	—	FLC33D
Trim Type: Square Die-Cast Overlap	—	SDO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
	1100L	
	1300L	
	1500L	
	1700L	
	1900L	
	2100L	
Voltage		
120/270 Volt <small>(IC-rated housing: SW - 1100lm max. T-rated housing: SW - 1100lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC / Airtight	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	
Emergency Battery with Remote Test Switch <small>(T-rated housing only. Above ceiling access required.)</small>	EMR	
Trim & LED Module		
Aperture: 3.5" Square Reflector	—	LC33
Trim Type: Square Die-Cast Overlap	—	SDO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output <small>(Trim & housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	DNT	
Short Cone with 60° cut-off	DNS	
Distribution		
Narrow Flood	NFL	
Flood1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Finish		
Clear Diffuse	CD	
White	WH	
Optional Flange Finish <small>(CD finish only. For matching finishes leave blank)</small>		
White Painted	WP	



Housing Ordering

ID+ 3.5"x3.5" Wall Wash	—	FLC33W
Trim Type: Square Die-Cast Overlap	—	SDO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
Voltage		
120/270 Volt <small>(IC-rated housing: SW - 1100lm max. T-rated housing: SW - 700lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	
Trim & LED Module		
Aperture		
3.5" Square Reflector	LC33	
3.5" Square Airtight Reflector	LC33AT	
Trim Type: Square Die-Cast Overlap	—	SDO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output <small>(Trim & housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	WWT	
Short Cone with 60° cut-off	WWS	
Finish		
Clear Diffuse	CD	
White	WH	
Optional Flange Finish <small>(CD finish only. For matching finishes leave blank)</small>		
White Painted	WP	

QS QUICKSHIP TERMS

5 DAY: 200 pieces or less

QS QUICKSHIP TERMS


5 DAY: 100 pieces or less

ID + 3.5" X 3.5"

TRIMLESS DOWNLIGHT & WALL WASH



ID+ 3.5" x 3.5" TRIMLESS DOWNLIGHT & WALL WASH

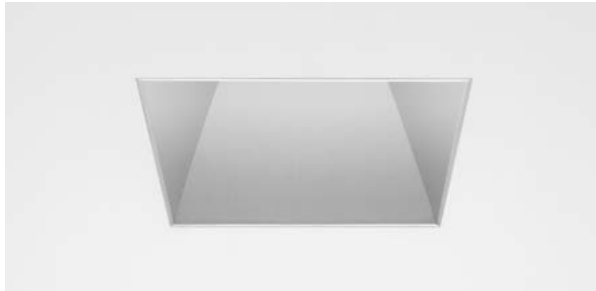

Housing Ordering

ID+ 3.5"x3.5" Downlight		FLC33D
Trim Type: Square Die-Cast Trimless	—	SDT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Voltage		
120/270 Volt <small>(IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC / Airtight	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	

Trim & LED Module

Aperture: 3.5" Square Reflector	—	LC33
Trim Type: Square Die-Cast Trimless	—	SDT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output <small>(Trim & housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	DNT	
Short Cone with 60° cut-off	DNS	
Distribution		
Narrow Flood	NFL	
Flood1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Finish		
Clear Diffuse	CD	
White	WH	

Housing Ordering

ID+ 3.5"x3.5" Wall Wash		FLC33W
Trim Type: Square Die-Cast Trimless	—	SDT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
Voltage		
120/270 Volt <small>(IC-rated housing: SW - 1100lm max. T-rated housing: SW - 700lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum	CP	

Trim & LED Module

Aperture	3.5" Square Reflector	LC33
	3.5" Square Airtight Reflector	LC33AT
Trim Type: Square Die-Cast Trimless	—	SDT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output <small>(Trim & housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
Optic		
Tall Cone with 50° cut-off	WWT	
Short Cone with 60° cut-off	WWS	
Finish		
Clear Diffuse	CD	
White	WH	



5 DAY: 100 pieces or less



5 DAY: 200 pieces or less

10' + 4.5" DOWNLIGHT & WALL WASH



*4.5" Downlights

ID+ 4.5" DOWNLIGHT & WALL WASH



ID+ 4.5" Downlight		—	FLC4D
Trim Type: Round Overlap		—	RO
Color Options: Standard White, 80 & 90 CRI		—	SW
Lumen Output			
1000 Lumens	1000L		
1500 Lumens	1500L		
2000 Lumens	2000L		
2500 Lumens	2500L		
3000 Lumens	3000L		
(Not available with SP distribution or LFP.)			
Voltage			
UNV 120V/277V	UNV		
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)			
120V	120		
277V	277		
Control System & Dimming Level			
0-10V - 1% Dimming	L11		
0-10V - 10% Dimming	LD1		
Forward Phase (120V only)	LFP		
Housing Type			
IC Rated / Airtight	IC		
(L11 & LD1 2000L max. LFP 1500L max. LC4AT required for Airtight.)			
Thermally Protected	T		
Factory Options			
Bar Hangers	BH		
Chicago Plenum / National Plenum	CP		
Emergency Battery	EM		
(Must order LC4EM trim. Not wet location or outdoor rated.)			
Aperture			
4.5" Round Reflector	LC4		
4.5" Round Reflector - Airtight	LC4AT		
(IC housing required for Airtight rating)			
4.5" Round Reflector - Emergency	LC4EM		
(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)			
Trim Type: Round		—	RO
Lumen Output			
(Trim & housing output must match)			
1000 Lumens	1000L		
1500 Lumens	1500L		
2000 Lumens	2000L		
2500 Lumens	2500L		
3000 Lumens	3000L		
(Not available with SP distribution.)			
Color Temperature			
3000K, 80+ CRI	30K		
3500K, 80+ CRI or 90+ CRI	35K or 935K		
4000K, 80+ CRI	40K		
Optic: Downlight with 50° cut-off		—	DN
Distribution			
Spot	SP		
Narrow Flood	NFL		
Flood 1	FL1		
Flood 2	FL2		
Wide Flood	WFL		
Reflector Color			
Clear Diffuse	CD		
White (White Painted flange only)	WH		
Flange Finish			
Non-Painted (Clear Diffuse only)	NP		
White Painted	WP		

ID+ 4.5" Downlight		—	FLC4W
Trim Type: Round Overlap		—	RO
Color Options: Standard White, 80 & 90 CRI		—	SW
Lumen Output			
1000 Lumens	1000L		
1500 Lumens	1500L		
2000 Lumens	2000L		
2500 Lumens	2500L		
3000 Lumens	3000L		
(Not available with LFP.)			
Voltage			
UNV 120V/277V	UNV		
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)			
120V	120		
277V	277		
Control System & Dimming Level			
0-10V - 1% Dimming	L11		
0-10V - 10% Dimming	LD1		
Forward Phase (120V only)	LFP		
Housing Type			
IC Rated / Airtight	IC		
(L11 & LD1 2000L max. LFP 1500L max. LC4AT required for Airtight.)			
Thermally Protected	T		
Factory Options			
Bar Hangers	BH		
Chicago Plenum / National Plenum	CP		
Aperture			
4.5" Round Reflector	LC4		
4.5" Round Reflector - Airtight	LC4AT		
(IC housing required for Airtight rating)			
Trim Type: Round		—	RO
Lumen Output			
(Trim & housing output must match)			
1000 Lumens	1000L		
1500 Lumens	1500L		
2000 Lumens	2000L		
2500 Lumens	2500L		
3000 Lumens	3000L		
Color Temperature			
3000K, 80+ CRI	30K		
3500K, 80+ CRI or 90+ CRI	35K or 935K		
4000K, 80+ CRI	40K		
Optic: Wall Wash		—	WW
Reflector Color			
Clear Diffuse	CD		
White (White Painted flange only)	WH		
Flange Finish			
Non-Painted (Clear Diffuse only)	NP		
White Painted	WP		

QS QUICKSHIP TERMS
5 DAY: 100 pieces or less

QS QUICKSHIP TERMS
5 DAY: 200 pieces or less


ID + 4.5"

TRIMLESS DOWNLIGHT & WALL WASH



*4.5" Downlights

ID+ 4.5" TRIMLESS DOWNLIGHT & WALL WASH

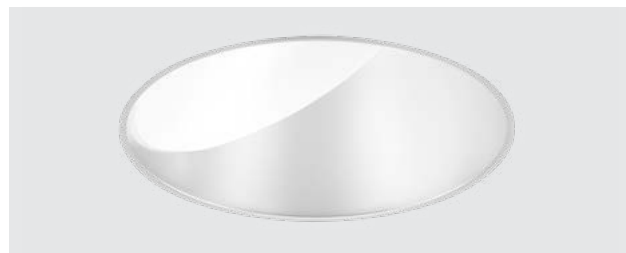

ID+ 4.5" Trimless Downlight	—	FLC4D
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution or LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 2000L max. LFP 1500L max. LC4AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Emergency Battery	EM	
(Must order LC4EM trim. Not wet location or outdoor rated.)		
Aperture		
4.5" Round Reflector	LC4	
4.5" Round Reflector - Airtight (IC housing required for Airtight rating)	LC4AT	
4.5" Round Reflector - Emergency (Required for "EM" option. DN optic only. Not wet location or outdoor rated.)	LC4EM	
Trim Type: Round Trimless	—	RT
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution.)		
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Optic: Downlight with 50° cut-off	—	DN
Distribution		
Spot	SP	
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Reflector Color		
Clear Diffuse	CD	
White	WH	

ID+ 4.5" Trimless Wall Wash	—	FLC4W
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 2000L max. LFP 1500L max. LC4AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Aperture		
4.5" Round Reflector	LC4	
4.5" Round Reflector - Airtight (IC housing required for Airtight rating)	LC4AT	
Trim Type: Round Trimless	—	RT
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Optic: Wall Wash	—	WW
Reflector Color		
Clear Diffuse	CD	
White	WH	

QS QUICKSHIP TERMS
5 DAY: 100 pieces or less

QS QUICKSHIP TERMS
5 DAY: 200 pieces or less

ID+ 4.5" X 4.5"

DOWNLIGHT & WALL WASH



*4.5" x 4.5" Downlights

ID+ 4.5" x 4.5" DOWNLIGHT & WALL WASH



ID+ 4.5" x 4.5" Downlight	—	FLC44D
Trim Type: Square Overlap	—	SO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution or LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 2000L max. LFP 1500L max. LC44AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Emergency Battery	EM	
(Must order LC44EM trim. Not wet location or outdoor rated.)		
Aperture		
4.5" Square Reflector	LC44	
4.5" Square Reflector - Airtight	LC44AT	
(IC housing required for Airtight rating)		
4.5" Square Reflector - Emergency	LC4EM	
(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)		
Trim Type: Square Die-Cast Overlap	—	SDO
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution.)		
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Optic: Downlight with 50° cut-off	—	DN
Distribution		
Spot	SP	
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Reflector Color		
Clear Diffuse	CD	
White (White Painted flange only)	WH	
Flange Finish		
Non-Painted (Clear Diffuse only)	NP	
White Painted	WP	

ID+ 4.5" x 4.5" Wall Wash	—	FLC44W
Trim Type: Square Overlap	—	SO
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
(Not available with LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 1500L max. LFP 1000L max. LC44AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Aperture		
4.5" Square Reflector	LC44	
4.5" Square Reflector - Airtight	LC44AT	
(IC housing required for Airtight rating)		
Trim Type: Square Die-Cast Overlap	—	SDO
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Optic: Wall Wash		
Reflector Color		WW
Clear Diffuse	CD	
White (White Painted flange only)	WH	
Flange Finish		
Non-Painted (Clear Diffuse only)	NP	
White Painted	WP	

QS QUICKSHIP TERMS
5 DAY: 100 pieces or less

QS QUICKSHIP TERMS
5 DAY: 200 pieces or less

ID# 4.5" X 4.5"

TRIMLESS DOWNLIGHT & WALL WASH



4.5" X 4.5" Downlights

ID+ 4.5" x 4.5" TRIMLESS DOWNLIGHT & WALL WASH



ID+ 4.5" x 4.5" Downlight	—	FLC44D
Trim Type: Square Trimless	—	ST
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution or LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 2000L max. LFP 1500L max. LC44AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Emergency Battery	EM	
(Must order LC44EM trim. Not wet location or outdoor rated.)		
Aperture		
4.5" Square Reflector	LC44	
4.5" Square Reflector - Airtight	LC44AT	
(IC housing required for Airtight rating)		
4.5" Square Reflector - Emergency	LC4EM	
(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)		
Trim Type: Square Die-Cast Trimless	—	SDT
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution.)		
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Optic: Downlight with 50° cut-off	—	DN
Distribution		
Spot	SP	
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Reflector Color		
Clear Diffuse	CD	
White	WH	

ID+ 4.5" x 4.5" Wall Wash	—	FLC44W
Trim Type: Square Trimless	—	ST
Color Options: Standard White, 80 & 90 CRI	—	SW
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
(Not available with LFP.)		
Voltage		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
Housing Type		
IC Rated / Airtight	IC	
(L11 & LD1 1500L max. LFP 1000L max. LC44AT required for Airtight.)		
Thermally Protected	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Aperture		
4.5" Square Reflector	LC44	
4.5" Square Reflector - Airtight	LC44AT	
(IC housing required for Airtight rating)		
Trim Type: Square Die-Cast Trimless	—	SDT
Lumen Output		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Optic: Wall Wash	—	WW
Reflector Color		
Clear Diffuse	CD	
White	WH	

QS QUICKSHIP TERMS
5 DAY: 100 pieces or less

QS QUICKSHIP TERMS
5 DAY: 200 pieces or less

ID + 3.5" CYLINDERS



*Surface Mount Only

ID+ 3.5" CYLINDERS



ID+ 3.5" Round Cylinder Pendant	—	FLCY3
Trim Type: Round	—	RD
Decorative Reveal		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
Lumen Output		
700 Lumens	700L	
1000 Lumens	1000L	
1500 Lumens	1500L	
1700 Lumens	1700L	
2000 Lumens (Power Canopy only)	2000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
Voltage		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
Canopy Configuration		
Shallow Canopy, Integral Driver (L11 & LFP only)	SC	
Power Canopy	PC	
Dimming Level		
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming (Shallow Canopy, Integral Driver, 120V only)	LFP	
Mounting		
72" Cable, Straight Feed (Cut in field)	C72	
144" Cable, Straight Feed (Cut in field)	C144	
Optic		
50° Cut-off Cone (Not available with SWFL distribution)	DNT	
50° Cut-off Cone with Solite Lens (NFL distribution only)	DNTS	
80° Cut-off Cone (SWFL distribution only)	DSS	
Distribution		
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Super Wide Flood	SWFL	
Factory Options		
Emergency Battery (J-box cannot be recessed above the ceiling. Remote test switch.)	EMR	
Reflector Color: Clear Diffuse	—	CD
Luminaire Finish		
Black with Black cord	BK	
White with White cord	WH	

ID+ 3.5" Round Cylinder Surface Mount	—	FLCY3
Trim Type: Round	—	RD
Decorative Reveal		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
Lumen Output		
700 Lumens	700L	
1000 Lumens	1000L	
1500 Lumens	1500L	
1700 Lumens	1700L	
2000 Lumens (Power Canopy only)	2000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
Voltage		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
Canopy Configuration		
Shallow Canopy, Integral Driver (L11 & LFP only)	SC	
Power Canopy	PC	
Dimming Level		
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming (Shallow Canopy, Integral Driver, 120V only)	LFP	
Mounting: Surface Mount	—	SM
Optic		
50° Cut-off Cone (Not available with SWFL distribution)	DNT	
50° Cut-off Cone with Solite Lens (NFL distribution only)	DNTS	
80° Cut-off Cone (SWFL distribution only)	DSS	
Distribution		
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Super Wide Flood	SWFL	
Factory Options		
Emergency Battery (J-box cannot be recessed above the ceiling. Remote test switch.)	EMR	
Reflector Color: Clear Diffuse	—	CD
Luminaire Finish		
Black with Black cord	BK	
White with White cord	WH	

QS QUICKSHIP TERMS
10 DAY: 50 pieces or less

QS QUICKSHIP TERMS
10 DAY: 50 pieces or less

ID+ 3.5"

PURE CYLINDERS



ID+ 3.5" PURE CYLINDERS



ID+ 3.5" Pure Cylinder Pendant	FLCY3N
Trim Type: Round	RD
Housing Height: 7"	7H
Direct Lumen Output	
700 Lumens	700DN
900 Lumens	900DN
1100 Lumens	1100DN
1300 Lumens	1300DN
1500 Lumens	1500DN
1700 Lumens	1700DN
1900 Lumens	1900DN
Color Temperature <small>(Add 9 for 90 CRI or H for 97 CRI. Leave blank for 80 CRI.)</small>	
2700K, 80/90	_27K
3000K, 80/90	_30K
3500K, 80/90	_35K
Circuits	1C
Single Circuit	1C
Voltage	
UNV 120/277 Volt	UNV
120 Volt	120
277 Volt	277
Canopy Configuration	
Shallow Canopy, Integral Driver	SC
Canopy Color	
Matte Black	BK
Matte White	WH
Control System & Dimming Level	
0-10V - 1% Dimming	L11
Phase Dimming	LFP
Mounting	
72" Cable, Straight Feed (Cut in field)	C72
144" Cable, Straight Feed (Cut in field)	C144
Suspension Color	
Black	BK
White	WH
Direct Optic	
50° cut-off cone	DNT
60° cut-off cone	DNS
75° cut-off cone with Solite Lens	DSS
Direct Distribution	
Narrow Flood	NFL
Flood 1	FL1
Flood 2	FL2
Wide Flood	WFL
Very Wide Flood (DSS only)	VWFL
Super Wide Flood (DSS only)	SWFL
Reflector Color	
Clear Diffuse	CD
White	WH
Luminaire Finish	
Black	BK
White	WH

ID+ 3.5" Pure Cylinder Surface Mount	FLCY3N
Trim Type: Round	RD
Housing Height: 7"	7H
Direct Lumen Output	
700 Lumens	700DN
900 Lumens	900DN
1100 Lumens	1100DN
1300 Lumens	1300DN
1500 Lumens	1500DN
1700 Lumens	1700DN
Color Temperature <small>(Add 9 for 90 CRI or H for 97 CRI. Leave blank for 80 CRI.)</small>	
2700K, 80/90	_27K
3000K, 80/90	_30K
3500K, 80/90	_35K
Circuits	1C
Single Circuit	1C
Voltage	
UNV 120/277 Volt	UNV
120 Volt	120
277 Volt	277
Canopy Configuration	
Shallow Canopy, Integral Driver	SC
Canopy Color	
Matte Black	BK
Matte White	WH
Control System & Dimming Level	
0-10V - 1% Dimming	L11
Phase Dimming	LFP
Mounting	SM
Surface Mount	
Direct Optic	
50° cut-off cone	DNT
60° cut-off cone	DNS
75° cut-off cone with Solite Lens	DSS
Direct Distribution	
Narrow Flood	NFL
Flood 1	FL1
Flood 2	FL2
Wide Flood	WFL
Very Wide Flood (DSS only)	VWFL
Super Wide Flood (DSS only)	SWFL
Reflector Color	
Clear Diffuse	CD
White	WH
Luminaire Finish	
Black	BK
White	WH

QS QUICKSHIP TERMS
10 DAY: 100 pieces or less

QS QUICKSHIP TERMS
10 DAY: 100 pieces or less

ID + 4.5" CYLINDERS



*Surface Mount Only

ID+ 4.5" CYLINDERS



ID+ 4.5" Round Cylinder Pendant	—	FLCY4
Trim Type: Round	—	RD
Decorative Reveal		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens <small>(Power Canopy only)</small>	3000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
Voltage		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
Canopy Configuration		
Shallow Canopy, Integral Driver <small>(LT1 & LFP only)</small>	SC	
Power Canopy	PC	
Dimming Level		
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming <small>(Shallow Canopy, Integral Driver, 120V only)</small>	LFP	
Mounting		
72" Cable, Straight Feed <small>(Cut in field)</small>	C72	
144" Cable, Straight Feed <small>(Cut in field)</small>	C144	
Optic		
50° Cut-off Cone <small>(Not available with SWFL distribution)</small>	DNT	
50° Cut-off Cone with Solite Lens <small>(NFL distribution only)</small>	DNTS	
80° Cut-off Cone <small>(SWFL distribution only)</small>	DSS	
Distribution		
Spot <small>(1000L & 1500L only)</small>	SP	
Narrow Flood	NFL	
Flood	FL	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Super Wide Flood	SWFL	
Factory Options		
Emergency Battery <small>(J-box cannot be recessed above the ceiling. Remote test switch.)</small>	EMR	
Reflector Color: Clear Diffuse	—	CD
Luminaire Finish		
Black with Black cord	BK	
White with White cord	WH	

ID+ 4.5" Round Cylinder Surface Mount	—	FLCY4
Trim Type: Round	—	RD
Decorative Reveal		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens <small>(Power Canopy only)</small>	3000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
Voltage		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
Shallow Canopy, Integral Driver	—	SC
Dimming Level		
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming <small>(120V only)</small>	LFP	
Mounting: Surface Mount	—	SM
Optic		
50° Cut-off Cone <small>(Not available with SWFL distribution)</small>	DNT	
50° Cut-off Cone with Solite Lens <small>(NFL distribution only)</small>	DNTS	
80° Cut-off Cone <small>(SWFL distribution only)</small>	DSS	
Distribution		
Spot <small>(1000L & 1500L only)</small>	SP	
Narrow Flood	NFL	
Flood	FL	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Super Wide Flood	SWFL	
Factory Options		
Emergency Battery <small>(J-box cannot be recessed above the ceiling. Remote test switch.)</small>	EMR	
Reflector Color: Clear Diffuse	—	CD
Luminaire Finish		
Black with Black cord	BK	
White with White cord	WH	

QS QUICKSHIP TERMS
10 DAY: 50 pieces or less


QS QUICKSHIP TERMS
10 DAY: 50 pieces or less

SEEM[®]1

SUSPENDED & DIRECT/INDIRECT



SEEM 1 LED

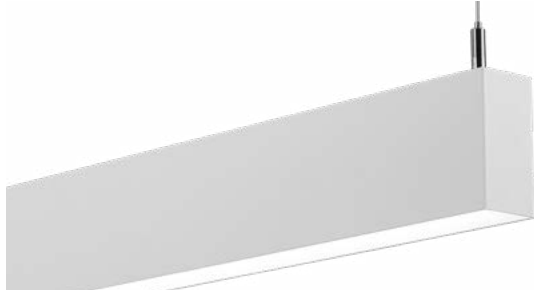

Seem 1	—	FSM1S
Shielding		
Asymmetric Lens	AS	_____
Batwing Lens	BW	_____
Flush Lens	FL	_____
Lumen Output		
125 Lumens per foot (4' minimum length.)	125LF	_____
250 Lumens per foot (3' minimum length.)	250LF	_____
375 Lumens per foot	375LF	_____
500 Lumens per foot	500LF	_____
625 Lumens per foot	625LF	_____
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
—	—	1C
120/277 UNV Voltage		
—	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
24" Cable Suspension	C24_	_____
48" Cable Suspension	C48_	_____
96" Cable Suspension <small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small>	C96_	_____
<small>(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>		
Surface Mount	SM	_____
Factory Options		
Black Cord	BKCD	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
Finish		
Black	BK	_____
White	WH	_____
Length		
Specify luminaire/row length in 1" increments <small>(2" minimum length.)</small>	_ft. _in.	ft. in.

Seem 1 Direct/Indirect	—	FSM1BS
Shielding		
Asymmetric optic top / Asymmetric lens bottom	ASAS	_____
Asymmetric optic top / Flush lens bottom	ASFL	_____
Batwing optic top / Asymmetric lens bottom	BWAS	_____
Batwing optic top / Flush lens bottom	BWFL	_____
Batwing optic top / Batwing lens bottom	BWBW	_____
Dust cover top / Asymmetric lens bottom	DCAS	_____
Dust cover top / Flush lens bottom	DCFL	_____
Dust cover top / Batwing lens bottom	DCBW	_____
Direct Distribution		
125 Lumens per foot	125DN	_____
250 Lumens per foot	250DN	_____
375 Lumens per foot	375DN	_____
500 Lumens per foot	500DN	_____
625 Lumens per foot	625DN	_____
Indirect Distribution		
125 Lumens per foot	125UP	_____
250 Lumens per foot	250UP	_____
375 Lumens per foot	375UP	_____
500 Lumens per foot	500UP	_____
625 Lumens per foot	625UP	_____
800 Lumens per foot	800UP	_____
1000 Lumens per foot	1000UP	_____
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
Single Circuit	1C	_____
Dual Circuit	2C	_____
120/277 UNV Voltage		
—	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
24" Cable Suspension	C24_	_____
48" Cable Suspension	C48_	_____
96" Cable Suspension <small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small>	C96_	_____
<small>(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>		
Factory Options		
Black Cord	BKCD	_____
Finish		
Black	BK	_____
White	WH	_____
Length		
Specify luminaire/row length in 1" increments <small>(4" minimum length.)</small>	_ft. _in.	ft. in.

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 4' minimum length, maximum of 3 locations.
See cut sheet ordering guide for emergency option ordering details.

QS QUICKSHIP TERMS

10 DAY: 1000' total length


SEEM[®] 1 RECESSED



SEEM 1 LED

Seem 1	—	FSM1
Shielding		
Asymmetric Lens	AS	_____
Batwing Lens	BW	_____
Flush Lens	FL	_____
Lumen Output		
125 Lumens per foot (4' minimum length.)	125LF	_____
250 Lumens per foot (3' minimum length.)	250LF	_____
375 Lumens per foot	375LF	_____
500 Lumens per foot	500LF	_____
625 Lumens per foot	625LF	_____
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
Standard 15/16" Lay-in	G1	_____
Standard 15/16" Tegular	T1	_____
Standard 9/16" Lay-in	G2	_____
Standard 9/16" Tegular	T2	_____
9/16" Slot-tee Tegular	G3	_____
Tall 15/16" Lay-in	G4	_____
Tall 15/16" Tegular	T4	_____
Tall 9/16" Lay-in	G5	_____
Tall 9/16" Tegular	T5	_____
Node 9/16" Tegular	T6	_____
Mud-in Trimless	XFF	_____
Non-Drywall Hard Surface	XFN	_____
Hard Surface, Wood	XFW	_____
Factory Options		
Chicago Plenum	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
Finish: Matte White Housing	—	WH
Length		ft. in.
Specify luminaire/row length in 1" increments	_ft. _in.	_____

(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)

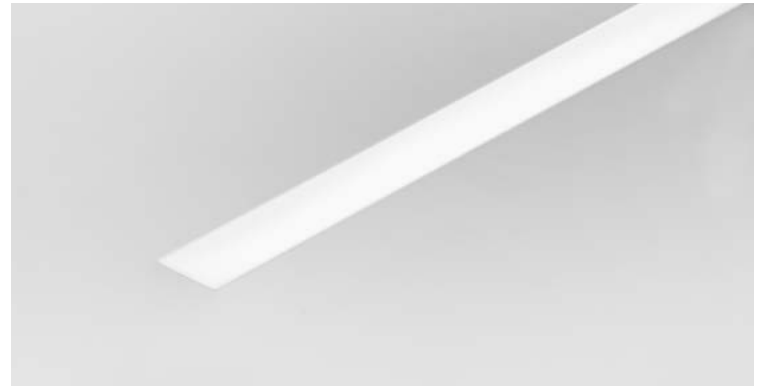

QS QUICKSHIP TERMS

10 DAY: 1000' total length. 48' maximum per pattern section.

***EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

SEEM[®] 2

SUSPENDED & WALL MOUNT



SEEM 2 LED



Seem 2	—	FSM2LS
Shielding		
Asymmetric Lens	AS	
Batwing Lens	BW	
Flush Satin Lens	FL	
0.5" Pop-Down Lens	PD05	
Lumen Output		
125 Lumens per foot (4' minimum length.)	125LF	
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
750 Lumens per foot	750LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		
120/277 UNV Voltage		
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
24" Cable Suspension	C24__	
48" Cable Suspension	C48__	
96" Cable Suspension (Specify canopy color White (WH) or Black (BK). Example: C24WH.)	C96__	
<small>(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>		
Surface Mount	SM	
Factory Options		
Black Cord	BKCD	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1' increments (2' minimum length.)	X'	

Seem 2 Wall Mount	—	FSM2LW
Shielding		
Asymmetric Lens	AS	
Flush Satin Lens	FL	
0.5" Pop-Down Lens	PD05	
Lumen Output		
125 Lumens per foot (4' minimum length.)	125LF	
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
750 Lumens per foot	750LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		
120/277 UNV Voltage		
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Wall Mount		
Factory Options		
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1' increments (2' minimum length.)	X'	

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 3' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 3' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

SEEM[®] 2

DIRECT/INDIRECT & WALL MOUNT



SEEM 2 LED



Seem 2 Direct/Indirect	—	FSM2BS
Shielding		
Asymmetric optic top / Asymmetric lens bottom	ASAS	_____
Asymmetric optic top / Flush lens bottom	ASFL	_____
Asymmetric optic top / 0.5" Pop-down lens bottom	ASPD05	_____
Batwing optic top / Asymmetric lens bottom	BWAS	_____
Batwing optic top / Batwing lens bottom	BWBW	_____
Batwing optic top / Flush lens bottom	BWFL	_____
Batwing optic top / 0.5" Pop-down lens bottom	BWPD05	_____
Dust cover top / Asymmetric lens bottom	DCAS	_____
Dust cover top / Batwing lens bottom	DCBW	_____
Dust cover top / Flush lens bottom	DCFL	_____
Dust cover top / 0.5" Pop-down lens bottom	DCPD05	_____
Direct Distribution		
125 Lumens per foot	125DN	_____
250 Lumens per foot	250DN	_____
375 Lumens per foot	375DN	_____
500 Lumens per foot	500DN	_____
625 Lumens per foot	625DN	_____
750 Lumens per foot	750DN	_____
875 Lumens per foot	875DN	_____
1000 Lumens per foot	1000DN	_____
Indirect Distribution		
250 Lumens per foot	250UP	_____
375 Lumens per foot	375UP	_____
500 Lumens per foot	500UP	_____
625 Lumens per foot	625UP	_____
750 Lumens per foot	750UP	_____
875 Lumens per foot	875UP	_____
1000 Lumens per foot	1000UP	_____
1250 Lumens per foot	1250UP	_____
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
Single Circuit	1C	_____
Dual Circuit	2C	_____
120/277 UNV Voltage		
—	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
24" Cable Suspension	C24	_____
48" Cable Suspension	C48	_____
96" Cable Suspension	C96	_____
<small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small>		
<small>(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>		
Factory Options		
Black Cord	BKCD	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
Finish		
Black	BK	_____
White	WH	_____
Length		
Specify luminaire/row length in 1' increments <small>(4' minimum length.)</small>	X'	_____

Seem 2 Direct/Indirect Wall Mount	—	FSM2BW
Shielding		
Asymmetric optic top / Asymmetric lens bottom	ASAS	_____
Asymmetric optic top / Flush lens bottom	ASFL	_____
Asymmetric optic top / 0.5" Pop-down lens bottom	ASPD05	_____
Dust cover top / Asymmetric lens bottom	DCAS	_____
Dust cover top / Flush lens bottom	DCFL	_____
Dust cover top / 0.5" Pop-down lens bottom	DCPD05	_____
Direct Distribution		
125 Lumens per foot	125DN	_____
250 Lumens per foot	250DN	_____
375 Lumens per foot	375DN	_____
500 Lumens per foot	500DN	_____
625 Lumens per foot	625DN	_____
750 Lumens per foot	750DN	_____
875 Lumens per foot	875DN	_____
1000 Lumens per foot	1000DN	_____
Indirect Distribution		
250 Lumens per foot	250UP	_____
375 Lumens per foot	375UP	_____
500 Lumens per foot	500UP	_____
625 Lumens per foot	625UP	_____
750 Lumens per foot	750UP	_____
875 Lumens per foot	875UP	_____
1000 Lumens per foot	1000UP	_____
1250 Lumens per foot	1250UP	_____
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
Single Circuit	1C	_____
Dual Circuit	2C	_____
120/277 UNV Voltage		
—	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Wall Mount		
—	—	WM
Factory Options		
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
Finish		
Black	BK	_____
White	WH	_____
Length		
Specify luminaire/row length in 1' increments <small>(4' minimum length.)</small>	X'	_____

QS QUICKSHIP TERMS

10 DAY: 1000' total length


***EC & EM:** Maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** Maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

SEEM² RECESSED

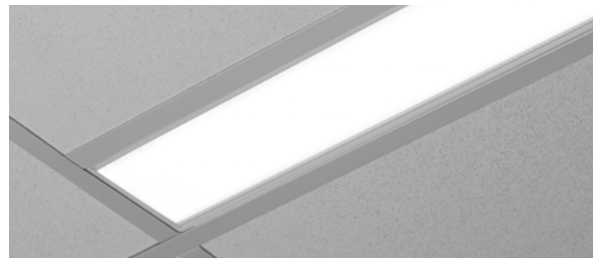

Seem 2 LED	—	FSM2L
Shielding		
Asymmetric Lens	AS	_____
Batwing Lens	BW	_____
Flush Satin Lens	FL	_____
0.5" Pop-Down Lens	PD05	_____
Regress Lens <small>(Housing height 5.5"; Ceiling applications only)</small>	SR	_____
Regress High Performance Lens <small>(Housing height 5.5"; Ceiling applications only)</small>	SRXP	_____
Lumen Output		
125 Lumens per foot <small>(LD1 & L11 only, 4' minimum.)</small>	125LF	_____
250 Lumens per foot	250LF	_____
375 Lumens per foot	375LF	_____
500 Lumens per foot	500LF	_____
625 Lumens per foot	625LF	_____
750 Lumens per foot*	750LF	_____
875 Lumens per foot*	875LF	_____
1000 Lumens per foot* <small>(*Not available with SR & SRXP)</small>	1000LF	_____
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
Standard 15/16" Lay-in	G1	_____
Standard 15/16" Tegular	T1	_____
Standard 9/16" Lay-in	G2	_____
Standard 9/16" Tegular	T2	_____
9/16" Slot-tee Tegular	G3	_____
Tall 15/16" Lay-in	G4	_____
Tall 15/16" Tegular	T4	_____
Tall 9/16" Lay-in	G5	_____
Tall 9/16" Tegular	T5	_____
Node 9/16" Tegular	T6	_____
Factory Options		
Chicago Plenum <small>(Not available with Flex Whip)</small>	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
Finish: Matte White Housing	—	WH
Length Specify luminaire/row length in " increments <small>(2' minimum length, lengths are nominal, " increments based on T-centers. Housing length is " shorter than specified.)</small>	_ft. _in.	ft. in.


QS QUICKSHIP TERMS

10 DAY: 1000' total length. 48' maximum per pattern section.


***EC & EM:** 4' minimum length, maximum of 3 locations.
See cut sheet ordering guide for emergency option ordering details.



SEEM 2 LED

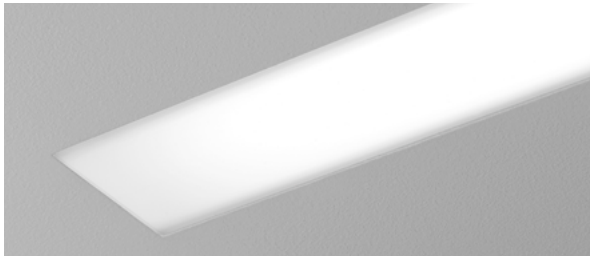

Seem 2 LED	—	FSM2L
Shielding		
Flush Satin Lens	FL	_____
Regress Lens <small>(Housing height 5.5" Ceiling applications only)</small>	SR	_____
Regress High Performance Lens <small>(Housing height 5.5" Ceiling applications only)</small>	SRXP	_____
Lumen Output		
125 Lumens per foot <small>(LD1 & L11 only, 4' minimum.)</small>	125LF	_____
250 Lumens per foot	250LF	_____
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
—	—	1C
120/277 UNV Voltage		
—	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
Trim Flange Drywall	TF	_____
Trim Flange Wood	TFW	_____
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	_____
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	_____
Mud-in Trimless, set thickness in field <small>(Mounting equipment assembled in field)</small>	XFF	_____
Non-Drywall Hard Surface	XFN	_____
Hard Surface, Wood	XFW	_____
Factory Options		
Chicago Plenum <small>(Not available with Flex Whip)</small>	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
Finish: Matte White Housing		
—	—	WH
Length		
Specify luminaire/row length in 1" increments <small>(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)</small>	_ft. _in.	ft. in.

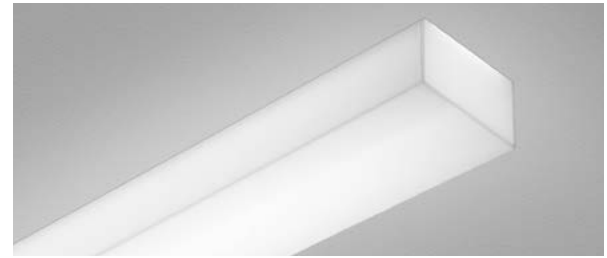

Seem 2 LED	—	FSM2L
Shielding - 0.5" Pop-down Lens		
Lumen Output		
125 Lumens per foot <small>(LD1 & L11 only, 4' minimum.)</small>	125LF	_____
250 Lumens per foot	250LF	_____
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
—	—	1C
120/277 UNV Voltage		
—	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
Trim Flange Drywall	TF	_____
Trim Flange Wood	TFW	_____
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	_____
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	_____
Mud-in Trimless, set thickness in field <small>(Mounting equipment assembled in field)</small>	XFF	_____
Non-Drywall Hard Surface	XFN	_____
Hard Surface, Wood	XFW	_____
Factory Options		
Chicago Plenum <small>(Not available with Flex Whip)</small>	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
Finish: Matte White Housing		
—	—	WH
Length		
Specify luminaire/row length in 1" increments <small>(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)</small>	X'	_____

QS QUICKSHIP TERMS

10 DAY: 1000' total length. 48' maximum per pattern section.
***EC & EM:** 4' minimum length, maximum of 3 locations.
 See cut sheet ordering guide for emergency option ordering details.

QS QUICKSHIP TERMS

10 DAY: 1000' total length
***EM:** 4' minimum length, maximum of 3 locations.
 See cut sheet ordering guide for emergency option ordering details.

SEEM[®] 4

SUSPENDED & WALL MOUNT




Seem 4 LED	—	FSM4LS
Shielding		
Batwing Lens	BW	_____
Flush Satin Lens	FL	_____
Lumen Output		
275 Lumens per foot	275LF	_____
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
875 Lumens per foot	875LF	_____
1000 Lumens per foot	1000LF	_____
1125 Lumens per foot	1125LF	_____
1250 Lumens per foot	1250LF	_____
Color Temperature		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
120/277 UNV Voltage		
		1C
		UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
24" Cable Suspension	C24_	_____
48" Cable Suspension	C48_	_____
96" Cable Suspension <small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small>	C96_	_____
<small>(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>		
Surface Mount	SM	_____
Factory Options		
Black Cord	BKCD	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
Finish		
Black	BK	_____
White	WH	_____
Length		
Specify luminaire/row length in 1' increments	X'	_____

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 4' minimum length, maximum of 3 locations.
See cut sheet ordering guide for emergency option ordering details.

SEEM 4 LED

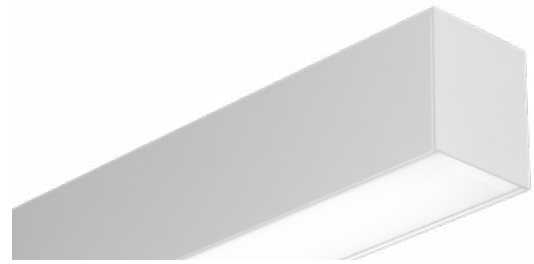

Seem 4 LED Pop-Down	—	FSM4LS
Shielding: 0.5" Pop-Down Lens	—	PD05
Lumen Output		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
24" Cable Suspension	C24__	
48" Cable Suspension	C48__	
96" Cable Suspension (Specify canopy color White (WH) or Black (BK). Example: C24WH.)	C96__	
(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)		
Surface Mount	SM	
Factory Options		
Black Cord	BKCD	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1' increments	X'	

Seem 4 LED Wall Mount	—	FSM4LW
Shielding: Flush Satin Lens	—	FL
Lumen Output		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Wall Mount	—	WM
Factory Options		
Emergency Circuit*	EC	
Emergency Battery Pack*	EM	
Finish		
Black	BK	
White	WH	
Length		
Specify luminaire/row length in 1' increments (2' minimum length.)	X'	

QS QUICKSHIP TERMS

10 DAY: 1000' total length
***EC & EM:** 4' minimum length, maximum of 3 locations.
 See cut sheet ordering guide for emergency option ordering details.

QS QUICKSHIP TERMS



10 DAY: 1000' total length
***EC & EM:** 4' minimum length, maximum of 3 locations.
 See cut sheet ordering guide for emergency option ordering details.

SEEM[®] 4

DIRECT / INDIRECT & WALL MOUNT



SEEM 4 LED

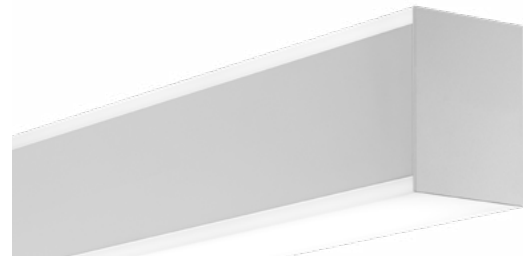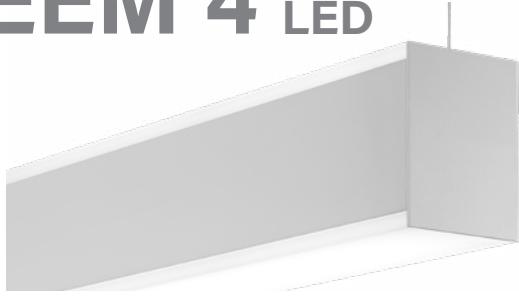

Seem 4 Direct/Indirect	—	FSM4BS
Shielding		
Batwing optic top / Batwing lens bottom	BWBW	_____
Batwing optic top / Flush lens bottom	BWFL	_____
Batwing optic top / 0.5" Pop-down bottom	BWPD05	_____
Flush lens top / Batwing lens bottom	FLBW	_____
Flush lens top / Flush lens bottom	FLFL	_____
0.5" Pop-up top / Batwing lens bottom	PUBW	_____
0.5" Pop-up top / Flush lens bottom	PUFL	_____
0.5" Pop-up top / 0.5" Pop-down bottom	PUPD05	_____
Direct Distribution		
<small>(875 Lumens per foot maximum for xxPD05.)</small>		
275 Lumens per foot	275DN	_____
375 Lumens per foot	375DN	_____
625 Lumens per foot	625DN	_____
875 Lumens per foot	875DN	_____
1000 Lumens per foot	1000DN	_____
1125 Lumens per foot	1125DN	_____
1250 Lumens per foot	1250DN	_____
Indirect Distribution		
<small>(1000 Lumens per foot maximum for xxPD05.)</small>		
275 Lumens per foot	275UP	_____
375 Lumens per foot	375UP	_____
625 Lumens per foot	625UP	_____
875 Lumens per foot	875UP	_____
1000 Lumens per foot	1000UP	_____
1125 Lumens per foot	1125UP	_____
1250 Lumens per foot	1250UP	_____
Color Temperature		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
Single Circuit	1C	_____
Dual Circuit	2C	_____
<small>(Multiple feeds required for 0-10V drivers)</small>		
120/277 UNV Voltage		
—	UNV	_____
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
24" Cable Suspension	C24__	_____
48" Cable Suspension	C48__	_____
96" Cable Suspension	C96__	_____
<small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small>		
<small>(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>		
Factory Options		
Black Cord	BKCD	_____
Emergency Circuit*	EC	_____
Emergency Battery Pack*	EM	_____
Finish		
Black	BK	_____
White	WH	_____
Length		
Specify luminaire/row length in 1' increments	X'	_____

Seem 4 Direct/Indirect Wall Mount	—	FSM4BW
Shielding		
Flush lens top / Flush lens bottom	FLFL	_____
0.5" Pop-up top / Flush lens bottom	PUFL	_____
0.5" Pop-up top / 0.5" Pop-down bottom	PUPD05	_____
Direct Distribution		
275 Lumens per foot	275DN	_____
375 Lumens per foot	375DN	_____
625 Lumens per foot	625DN	_____
875 Lumens per foot	875DN	_____
1000 Lumens per foot	1000DN	_____
<small>(FLFL & PUFL only.)</small>		
1250 Lumens per foot	1250DN	_____
<small>(FLFL only.)</small>		
Indirect Distribution		
275 Lumens per foot	275UP	_____
375 Lumens per foot	375UP	_____
625 Lumens per foot	625UP	_____
875 Lumens per foot	875UP	_____
1000 Lumens per foot	1000UP	_____
<small>(FLFL & PUFL only.)</small>		
1250 Lumens per foot	1250UP	_____
<small>(FLFL only.)</small>		
Color Temperature		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
Single Circuit	1C	_____
Dual Circuit	2C	_____
<small>(Multiple feeds required for 0-10V drivers)</small>		
120/277 UNV Voltage		
—	UNV	_____
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Wall Mount		
—	WM	_____
Factory Options		
Emergency Circuit*	EC	_____
Emergency Battery Pack*	EM	_____
Finish		
Black	BK	_____
White	WH	_____
Length		
Specify luminaire/row length in 1' increments	X'	_____

QS QUICKSHIP TERMS

10 DAY: 1000' total length
***EC & EM:** 8' lengths or longer. 4' illuminated area. See cut sheet ordering guide for emergency option ordering details.

QS QUICKSHIP TERMS

10 DAY: 1000' total length
***EC & EM:** 8' lengths or longer. 4' illuminated area. See cut sheet ordering guide for emergency option ordering details.

SEEM[®] 4 RECESSED




Seem 4 LED	—	FSM4L
Shielding		
Batwing Lens	BW	
Flush Satin Lens	FL	
Regress Lens	SR	
Regress High Performance Lens	SRXP	
Lumen Output		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
1125 Lumens per foot	1125LF	
1250 Lumens per foot	1250LF	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit		1C
120/277 UNV Voltage		UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
Standard 15/16" Lay-in	G1	
Standard 15/16" Tegular	T1	
Standard 9/16" Lay-in	G2	
Standard 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in	G4	
Tall 15/16" Tegular	T4	
Tall 9/16" Lay-in	G5	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
Factory Options		
Chicago Plenum	CP	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
Finish: Matte White Housing		WH
Length		
Specify luminaire/row length in 1" increments	_ft. _in.	ft. in.
<small>(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)</small>		

QS QUICKSHIP TERMS

10 DAY: 1000' total length, 48' maximum per pattern section.

***EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

SEEM 4 LED

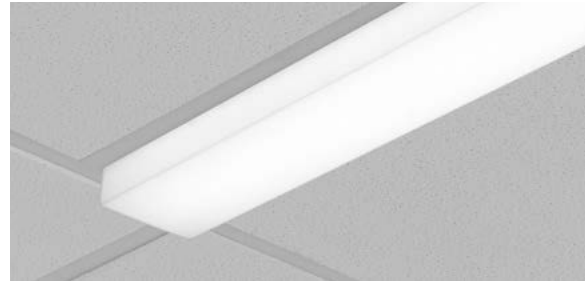

Seem 4 LED	—	FSM4L
Shielding		
Batwing Lens	BW	_____
Flush Satin Lens	FL	_____
Regress Lens	SR	_____
(Ceiling applications only)		
Regress High Performance Lens	SRXP	_____
(Ceiling applications only)		
Lumen Output		
275 Lumens per foot	275LF	_____
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
875 Lumens per foot	875LF	_____
1000 Lumens per foot	1000LF	_____
1125 Lumens per foot	1125LF	_____
1250 Lumens per foot	1250LF	_____
Color Temperature		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
120/277 UNV Voltage		
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
Trim Flange Drywall	TF	_____
Trim Flange Wood	TFW	_____
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	_____
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	_____
Mud-in Trimless, set thickness in field	XFF	_____
(Mounting equipment assembled in field)		
Non-Drywall Hard Surface	XFN	_____
Hard Surface, Wood	XFW	_____
Factory Options		
Chicago Plenum	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
Finish: Matte White Housing		
Length		
Specify luminaire/row length in 1" increments	_ft. _in.	ft. in.
<small>(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)</small>		

Seem 4 LED Pop-down Lens	—	FSM4L
Shielding: 0.5" Pop-down Lens		
Lumen Output		
275 Lumens per foot	275LF	_____
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
750 Lumens per foot	750LF	_____
Color Temperature		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
120/277 UNV Voltage		
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
Standard 15/16" Lay-in	G1	_____
Standard 15/16" Tegular	T1	_____
Standard 9/16" Lay-in	G2	_____
Standard 9/16" Tegular	T2	_____
9/16" Slot-tee Tegular	G3	_____
Tall15/16" Lay-in	G4	_____
Tall 15/16" Tegular	T4	_____
Tall 9/16" Lay-in	G5	_____
Tall 9/16" Tegular	T5	_____
Node 9/16" Tegular	T6	_____
Trim Flange Drywall	TF	_____
Trim Flange Wood	TFW	_____
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	_____
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	_____
Mud-in Trimless, set thickness in field	XFF	_____
(Mounting equipment assembled in field)		
Non-Drywall Hard Surface	XFN	_____
Hard Surface, Wood	XFW	_____
Factory Options		
Chicago Plenum	CP	_____
Emergency Circuit*	EC	_____
Emergency Battery Pack*	EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
Finish: Matte White Housing		
Length		
Specify luminaire/row length in 1" increments	X'	_____
<small>(2' minimum length.)</small>		

QS QUICKSHIP TERMS

10 DAY: 1000' total length. 48' maximum per pattern section.

***EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

QS QUICKSHIP TERMS

10 DAY: 1000' total length. 48' maximum per pattern section.

***EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

SEEM[®] 4-LP



SEEM 4-LP LED

Seem 4-LP LED	—	FSM4LP
Shielding: Flush Lens	—	FL
Lumen Output		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
Standard 15/16" Lay-in	G1	
Standard 15/16" Tegular	T1	
Standard 9/16" Lay-in	G2	
Standard 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in	G4	
Tall 15/16" Tegular	T4	
Tall 9/16" Lay-in	G5	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
Factory Options		
Chicago Plenum	CP	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
Finish: Matte White Housing	—	WH
Length		ft. in.
2'		
2' 6"		
3'		
4'		
5'		
6'		
7'		
7' 6"		
8'		

Specify luminaire/row length in 6" increments _ft. _in.
(8' minimum length)



QS QUICKSHIP TERMS

10 DAY: 1000' total length


***EC & EM:** 4' minimum length, maximum of 3 locations.
See cut sheet ordering guide for emergency option ordering details.

SEEM[®] 6 RECESSED



SEEM 6 LED

Seem 6 LED	—	FSM6L
Shielding		
Batwing Lens	BW	_____
Flush Satin Lens	FL	_____
Regressed Lens <small>(Ceiling applications only)</small>	SR	_____
Regressed High Performance Lens <small>(Ceiling applications only)</small>	SRXP	_____
Lumen Output		
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
875 Lumens per foot	875LF	_____
1000 Lumens per foot	1000LF	_____
1125 Lumens per foot	1125LF	_____
1250 Lumens per foot	1250LF	_____
Color Temperature		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
Single Circuit		
—	—	1C
120/277 UNV Voltage		
—	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
Mounting		
Standard 15/16" Lay-in	G1	_____
Standard 15/16" Tegular	T1	_____
Standard 9/16" Lay-in	G2	_____
Standard 9/16" Tegular	T2	_____
9/16" Slot-tee Tegular	G3	_____
Tall 15/16" Lay-in	G4	_____
Tall 15/16" Tegular	T4	_____
Tall 9/16" Lay-in	G5	_____
Tall 9/16" Tegular	T5	_____
Node 9/16" Tegular	T6	_____
Trim Flange Drywall	TF	_____
Trim Flange Wood	TFW	_____
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	_____
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	_____
Mud-in Trimless, set thickness in field <small>(Mounting equipment assembled in field)</small>	XFF	_____
Non-Drywall Hard Surface	XFN	_____
Hard Surface, Wood	XFW	_____
Factory Options		
Chicago Plenum	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
Finish: Matte White Housing		
—	—	WH
Length		
Specify luminaire/row length in 1" increments <small>(2" minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)</small>	__ft. __in.	_____

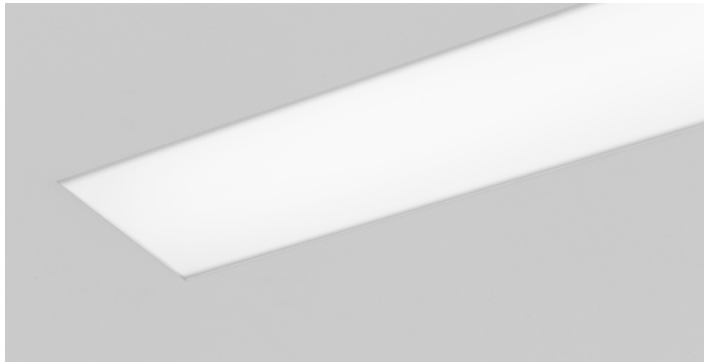

QS QUICKSHIP TERMS

- 10 DAY:** 1000' total length. 48' maximum per pattern section.
- *EC & EM:** 4' minimum length, maximum of 3 locations.
See cut sheet ordering guide for emergency option ordering details.

SEEM[®] 2

PERIMETER




SEEM 2 LED PERIMETER

Seem 2 LED Perimeter		—	FSM2PR
Housing Type			
Adjustable Lit Housing <small>(Allows for +/- 3" adjustment to overall run length. 3' minimum luminaire length.)</small>	ALH	_____	
Fixed Housing	FXH	_____	
Shielding			
Flush Lens <small>(Not available with Unlit Sliding Sleeves - SSB)</small>	FL0	_____	
2.5" Regress	FL2	_____	
4.0" Regress	FL4	_____	
2.5" Regress Grazer	GR2	_____	
4.0" Regress Grazer	GR4	_____	
Flush Asymmetric Room Fill <small>(Not available with Unlit Sliding Sleeves - SSB)</small>	AF0	_____	
Lumen Output			
125 Lumens per foot <small>(LD1 & L11 only, 4' minimum.)</small>	125LF	_____	
250 Lumens per foot	250LF	_____	
375 Lumens per foot	375LF	_____	
625 Lumens per foot	625LF	_____	
Color Temperature			
3000K, 80+ CRI	30K	_____	
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____	
4000K, 80+ CRI	40K	_____	
Circuit - Single Circuit		—	1C
Voltage - 120/277 UNV Volt		—	UNV
Control System & Dimming Level			
0-10V - 10% Dimming	LD1	_____	
0-10V - 1% Dimming	L11	_____	
Mounting			
Lay-in Grid	G	_____	
Flush (FL0 & AF0)	Slot Tee / Tegular Trim Flange Drywall	ST TF	_____
	Mud-in Trimless Drywall	XFF	_____
Regressed (FL2, FL4, GR2 & GR4)	Grid Trimless Drywall	G XF	_____
Factory Options			
Chicago Plenum <small>(Not available with Flex Whip)</small>	CP	_____	
Emergency Circuit*	_EC	_____	
Emergency Battery Pack*	_EM	_____	
6' New York City Flex Whip (120V)	FNY1	_____	
6' New York City Flex Whip (277V)	FNY2	_____	
6' Flex Whip	FW	_____	
Fixed Housing with Unlit Sliding Sleeves <small>(Set of two unlit 12" sleeves. Fixed housing in straight runs only. FL2, FL4, GR2 & GR4 only. 3' minimum luminaire length.)</small>	SSB	_____	
Finish - Matte White Housing		—	WH
Luminaire Length			
Specify luminaire/row length in 1" increments <small>(2' minimum length)</small>	_ft_in	_____	ft in



Standard Lens

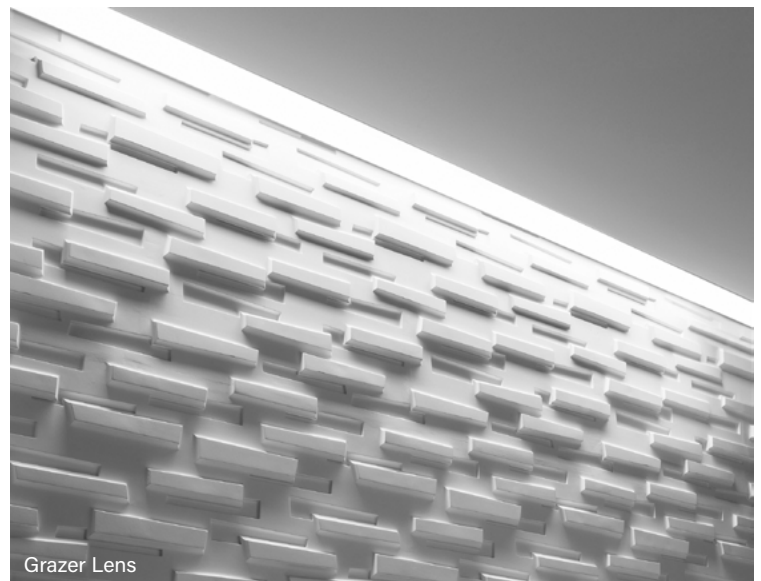

Grazer Lens


QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 4' minimum length, not available at corners, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

SEEM[®] 4 PERIMETER

You More.




SEEM 4 LED PERIMETER

Seem 4 LED Perimeter		—	FSM4PR
Housing Type			
Adjustable Lit Housing <small>(Allows for +/- 3" adjustment to overall run length. 3' minimum luminaire length.)</small>	ALH	_____	
Fixed Housing	FXH	_____	
Shielding			
Flush Lens*	FL0	_____	
2.5" Regress	FL2	_____	
4.0" Regress	FL4	_____	
Flush Grazer*	GR0	_____	
2.5" Regress Grazer	GR2	_____	
4.0" Regress Grazer	GR4	_____	
Flush Asymmetric Room Fill* <small>*(Not available with Unlit Sliding Sleeves - SSB)</small>	AF0	_____	
Lumen Output			
275 Lumens per foot	275LF	_____	
375 Lumens per foot	375LF	_____	
625 Lumens per foot	625LF	_____	
875 Lumens per foot	875LF	_____	
1000 Lumens per foot	1000LF	_____	
Color Temperature			
3000K, 80+ CRI	30K	_____	
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____	
4000K, 80+ CRI	40K	_____	
Circuit - Single Circuit		—	1C
Voltage - 120/277 UNV Volt		—	UNV
Control System & Dimming Level			
0-10V - 10% Dimming	LD1	_____	
0-10V - 1% Dimming	L11	_____	
Mounting			
Lay-in Grid	G	_____	
Flush (FL0, GR0 & AF0)	Slot Tee / Tegular	ST	
	Trim Flange Drywall	TF	
	Mud-in Trimless Drywall	XFF	
Regressed (FL2, FL4, GR2 & GR4)	Grid	G	
	Trimless Drywall	XF	
Factory Options			
Chicago Plenum	CP	_____	
Emergency Circuit*	_EC	_____	
Emergency Battery Pack*	_EM	_____	
6' New York City Flex Whip (120V)	FNY1	_____	
6' New York City Flex Whip (277V)	FNY2	_____	
6' Flex Whip	FW	_____	
Fixed Housing with Unlit Sliding Sleeves <small>(Set of two unlit 12" sleeves. Fixed housing in straight runs only. FL2, FL4, GR2 & GR4 only. 3' minimum luminaire length.)</small>	SSB	_____	
Finish - Matte White Housing		—	WH
Luminaire Length			
Specify luminaire/row length in 1" increments <small>(2' minimum length)</small>	_ft_in	_____	ft in



Standard Lens

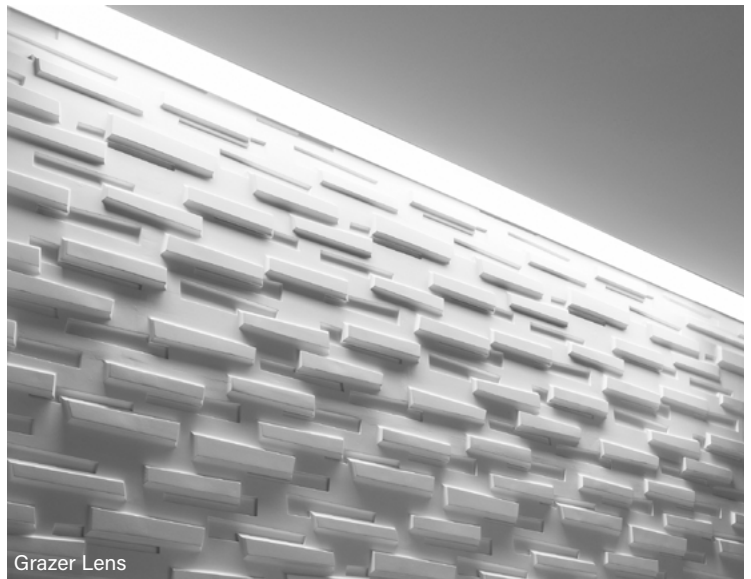

Grazer Lens

QS QUICKSHIP TERMS

10 DAY: 1000' total length

***EC & EM:** 4' minimum length, not available at corners, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

COVERT LITE[®]



COVERT LITE

Covert Lite	—	FCOLT
Profile: Horizontal Fixed	—	HF
Lumen Output		
500 Lumen	500L	
750 Lumen	750L	
1000 Lumen	1000L	
1200 Lumens	1200L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting: Cove	—	CV
Factory Options		
Emergency Circuit <small>(See EC Guide for default locations and ordering details.)</small>	_EC	
Finish: No Finish	—	NF
Length		
Specify luminaire/row length in 1' increments <small>(2' minimum length. Each feed location increases overall luminaire length by 1')</small>	X'	





QS QUICKSHIP TERMS

10 DAY: 400' total length

AERION[®] LED



AERION LED

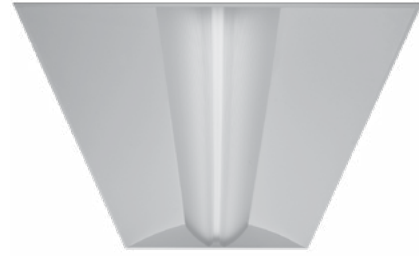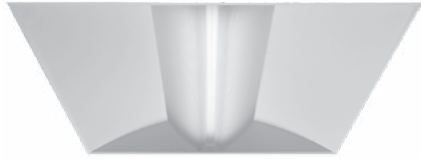

	Aerion LED	—	FARL
	Nominal Size: 2' x 2'	—	22
	Shielding: Acrylic Diffuser	—	AC
	Lumen Output		
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
High Efficiency	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
	Color Temperature		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	Single Circuit	—	1C
	Voltage		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	Control System & Dimming Level		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Mounting		
	15/16" Grid	G1	
	9/16" Grid	G2	
	9/16" Slot Tee	G3	
	Drywall Frame Kit	F	
	Factory Options		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	Finish: Matte Satin White	—	WH

	Aerion LED	—	FARL
	Nominal Size: 2' x 4'	—	24
	Shielding: Acrylic Diffuser	—	AC
	Lumen Output		
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
	5500 Lumens	5500L	
	4000 Lumens	4000LH	
High Efficiency	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
	Color Temperature		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	Single Circuit	—	1C
	Voltage		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	Control System & Dimming Level		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	Mounting		
	15/16" Grid	G1	
	9/16" Grid	G2	
	9/16" Slot Tee	G3	
	Drywall Frame Kit	F	
	Factory Options		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	Finish: Matte Satin White	—	WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less
10 DAY: 300 pieces or less



QS QUICKSHIP TERMS

5 DAY: 100 pieces or less
10 DAY: 300 pieces or less

AMICA[®] 2



AMICA 2

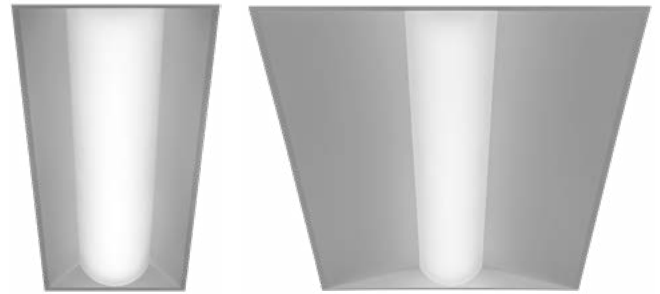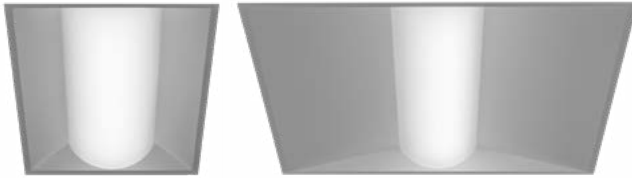

	Amica 2	—	FAM2
	Nominal Size		
	1' x 2'	12	
	2' x 2'	22	
	Shielding: Ribbed Acrylic Diffuser		
		—	ACR
	Lumen Output		
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	3500 Lumens	3500L	
	4000 Lumens	4000L	
High Efficiency	2000 Lumens	2000LH	
	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	Color Temperature		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	—	—	1C
	—	—	UNV
	120/277 UNV Voltage		
	Control System & Dimming Level		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
	Mounting		
	Grid	G	
	Drywall Frame Kit	F	
	Factory Options		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	—	—	WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less
10 DAY: 300 pieces or less


	Amica 2	—	FAM2
	Nominal Size		
	1' x 4'	14	
	2' x 4'	24	
	Shielding: Ribbed Acrylic Diffuser		
		—	ACR
	Lumen Output		
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
	5500 Lumens	5500L	
	6000 Lumens	6000L	
	6500 Lumens	6500L	
	7000 Lumens	7000L	
High Efficiency	7500 Lumens	7500L	
	4000 Lumens	4000LH	
	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
	6500 Lumens	6500LH	
	7000 Lumens	7000LH	
	7500 Lumens	7500LH	
	8000 Lumens	8000LH	
	Color Temperature		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	—	—	1C
	—	—	UNV
	120/277 UNV Voltage		
	Control System & Dimming Level		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
	Mounting		
	Grid	G	
	Drywall Frame Kit	F	
	Factory Options		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	—	—	WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less
10 DAY: 300 pieces or less

AMICA[®] LED



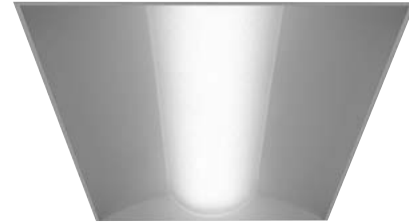

	Amica LED	—	FAML
	Nominal Size: 2' x 2'	—	22
	Shielding: Ribbed Acrylic Diffuser	—	ACR
	Lumen Output		
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
High Efficiency	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
	Color Temperature		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	Single Circuit	—	1C
	Voltage		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	Dimming Level: 0-10V - 10% Dimming	—	LD1
	Mounting		
	15/16" Grid	G1	
	9/16" Grid	G2	
	9/16" Slot Tee	G3	
	Drywall Frame Kit	F	
	Factory Options		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less
10 DAY: 300 pieces or less

	Amica LED	—	FAML
	Nominal Size: 2' x 4'	—	24
	Shielding: Ribbed Acrylic Diffuser	—	ACR
	Lumen Output		
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
	5500 Lumens	5500L	
	4000 Lumens	4000LH	
High Efficiency	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
	Color Temperature		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	Single Circuit	—	1C
	Voltage		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	Dimming Level: 0-10V - 10% Dimming	—	LD1
	Mounting		
	15/16" Grid	G1	
	9/16" Grid	G2	
	9/16" Slot Tee	G3	
	Drywall Frame Kit	F	
	Factory Options		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less
10 DAY: 300 pieces or less

EQUATION[®] 2



Equation 2	—	FEQ2
Nominal Size: 1' x 4'	—	14
Shielding		
Opal Acrylic Lens	AC	
MicroGlow Prismatic Lens	MG	
Lumen Output		
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
3500 Lumens	3500L	
4000 Lumens	4000L	
4500 Lumens	4500L	
5000 Lumens	5000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
Mounting		
15/16" Grid	G1	
9/16" Grid	G2	
Slot Tee	ST	
Drywall Frame Kit	F	
Surface Mount	SM	
24" Aircraft Cable	C24	
48" Aircraft Cable	C48	
96" Aircraft Cable	C96	
Factory Options		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery Pack with Integral Test Switch	EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

- 5 DAY:** 50 pieces or less
- 10 DAY:** 150 pieces or less



EQUATION 2



Equation 2		—	FEQ2
Nominal Size: 2' x 2'		—	22
Shielding			
	Opal Acrylic Lens	AC	
	MicroGlow Prismatic Lens	MG	
Lumen Output			
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	3500 Lumens	3500L	
High Efficiency	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
	4500 Lumens	4500LH	
Color Temperature			
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI or 90+ CRI	35K or 935K	
	4000K, 80+ CRI	40K	
Single Circuit		—	1C
120/277 UNV Voltage		—	UNV
Control System & Dimming Level			
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
Mounting			
	15/16" Grid	G1	
	9/16" Grid	G2	
	Slot Tee	ST	
	Drywall Frame Kit	F	
	Surface Mount	SM	
	24" Aircraft Cable	C24	
	48" Aircraft Cable	C48	
	96" Aircraft Cable	C96	
Factory Options			
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' New York City Flex Whip (120V)	FNY1	
	6' New York City Flex Whip (277V)	FNY2	
	6' Flex Whip	FW	
Finish: Matte White Finish		—	WH

Equation 2		—	FEQ2
Nominal Size: 2' x 4'		—	24
Shielding			
	Opal Acrylic Lens	AC	
	MicroGlow Prismatic Lens	MG	
Lumen Output			
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
	5500 Lumens	5500L	
High Efficiency	4000 Lumens	4000LH	
	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
	6500 Lumens	6500LH	
	7000 Lumens	7000LH	
	7500 Lumens	7500LH	
	8000 Lumens	8000LH	
Color Temperature			
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI or 90+ CRI	35K or 935K	
	4000K, 80+ CRI	40K	
Single Circuit		—	1C
120/277 UNV Voltage		—	UNV
Control System & Dimming Level			
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
Mounting			
	15/16" Grid	G1	
	9/16" Grid	G2	
	Slot Tee	ST	
	Drywall Frame Kit	F	
	Surface Mount	SM	
	24" Aircraft Cable	C24	
	48" Aircraft Cable	C48	
	96" Aircraft Cable	C96	
Factory Options			
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' New York City Flex Whip (120V)	FNY1	
	6' New York City Flex Whip (277V)	FNY2	
	6' Flex Whip	FW	
Finish: Matte White Finish		—	WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less
10 DAY: 300 pieces or less

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less
10 DAY: 300 pieces or less

LUNA[®] LED





Luna LED	—	FLUL
Nominal Size: 2' x 2'	—	22
Shielding: Perforated Shield	—	PS
Lumen Output		
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
3500 Lumens	3500L	
4000 Lumens (LD1 & L11 only.)	4000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
Grid	G	
Slot Tee	ST	
Drywall Frame Kit	F	
Factory Options		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery	B310	
Positional Clips	EQ	
6' Flex Whip	FW	
Finish: Matte White Finish	—	WH

Luna LED	—	FLUL
Nominal Size: 2' x 4'	—	24
Shielding: Perforated Shield	—	PS
Lumen Output		
3000 Lumens*	3000L	
3500 Lumens*	3500L	
4000 Lumens	4000L	
4500 Lumens	4500L	
5000 Lumens	5000L	
5500 Lumens	5500L	
6000 Lumens*	6000L	
6500 Lumens*	6500L	
7000 Lumens* (*LD1 & L11 only.)	7000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
120/277 UNV Voltage	—	UNV
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Mounting		
Grid	G	
Slot Tee	ST	
Drywall Frame Kit	F	
Factory Options		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery	B310	
Positional Clips	EQ	
6' Flex Whip	FW	
Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less
10 DAY: 300 pieces or less

QS QUICKSHIP TERMS

5 DAY: 100 pieces or less
10 DAY: 300 pieces or less

VEER[®] LED



Veer LED	—	FVRL
Nominal Size: 1' x 4'	—	14
Shielding		
Radial Acrylic Diffuser	ACR	
Flat Acrylic Diffuser	ACF	
Regress Acrylic Diffuser	ACG	
Lumen Output		
2500 Lumens	2500L	
3000 Lumens	3000L	
3500 Lumens	3500L	
4000 Lumens	4000L	
Color Temperature		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
4000K, 80+ CRI	40K	
Single Circuit	—	1C
Voltage		
120 Volt	120	
277 Volt	277	
UNV Volt	UNV	
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
Mounting		
Grid	G	
Slot Tee	ST	
Drywall Frame Kit	F	
Factory Options		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery Pack with Integral Test Switch	EM	
6' Flex Whip	FW	
Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

10 DAY: 50 pieces or less





	Veer LED	—	FVRL
	Nominal Size: 2' x 2'	—	22
	Shielding		
	Radial Acrylic Diffuser	ACR	
	Flat Acrylic Diffuser	ACF	
	Regress Acrylic Diffuser	ACG	
	Lumen Output		
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
High Efficiency	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
	Color Temperature		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	Single Circuit	—	1C
	Voltage		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	Control System & Dimming Level		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming (Not Right Light as standard, consult factory)	LD1	
	Mounting		
	Grid	G	
	Slot Tee	ST	
	Drywall Frame Kit	F	
	Factory Options		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	Finish: Matte White Finish	—	WH

QS QUICKSHIP TERMS

10 DAY: 100 pieces or less

	Veer LED	—	FVRL
	Nominal Size: 2' x 4'	—	24
	Shielding		
	Radial Acrylic Diffuser	ACR	
	Flat Acrylic Diffuser	ACF	
	Regress Acrylic Diffuser	ACG	
	Lumen Output		
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
	5500 Lumens	5500L	
High Efficiency	4000 Lumens	4000LH	
	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
	Color Temperature		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	Single Circuit	—	1C
	Voltage		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	Control System & Dimming Level		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming (Not Right Light as standard, consult factory)	LD1	
	Mounting		
	Grid	G	
	Slot Tee	ST	
	Drywall Frame Kit	F	
	Factory Options		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	Finish: Matte White Finish	—	WH


QS QUICKSHIP TERMS

10 DAY: 100 pieces or less



Quickship Guide

5 & 10 Day Configurations



FOCAL POINT®

Bringing It All To Light®

