

SPECIFICATION GRADE CONTRACTOR PACKAGE

**SIMPLE TO SELECT.
AVAILABLE QUICKLY.
EASY TO INSTALL.**



FOCAL POINT®

Bringing It All To Light®

THE LUMINAIRES YOU NEED TO GET THE JOB DONE.




Focal Point has put together a selection of troffers, linear recessed and linear suspended luminaires, downlights, cylinders and wall washers to allow you to outfit just about any space. We chose luminaires that offer a unique mix of performance, ease of installation, and competitive pricing. All products offer several Quickship configurations that ship in 2, 5 or 10 days. Unlike a stock program, Quickship allows you to meet tight schedules without sacrificing the ability to select the options that you need.

You get it all from Focal Point: products that are made right here, in the middle of America, and support from our team of experts, from bid to installation. Contact your Focal Point agent to learn more and get a quotation for your next project.




PRODUCT INDEX


SEEM® 1

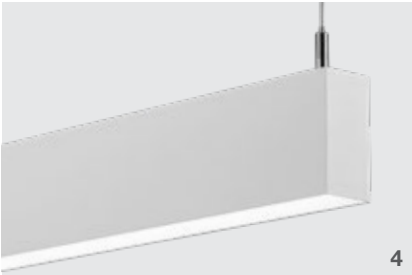


SEEM® 2

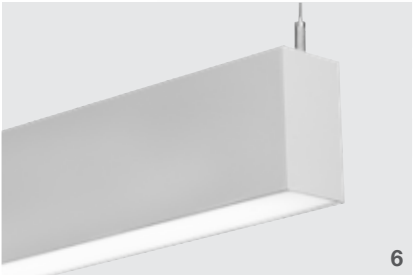

SEEM® 4

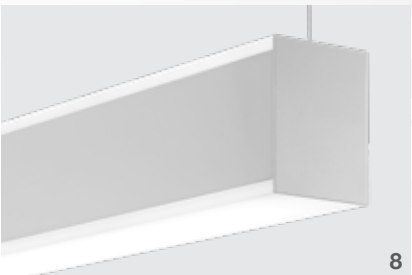


SEEM® 6

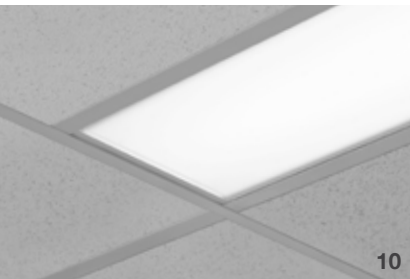

TWELVE LED



ID+ 3.5" DOWNLIGHTS

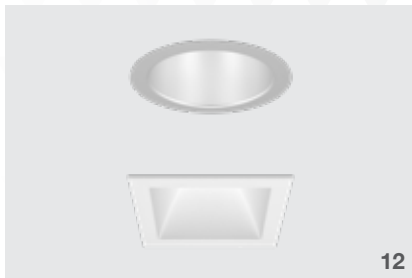

ID+ 4.5" DOWNLIGHTS




ID+ 3.5" CYLINDERS




ID+ 4.5" CYLINDERS



COVERT LITE®

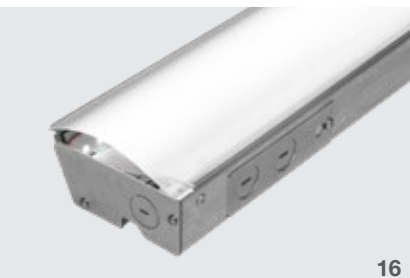

FOCUS WALL WASH

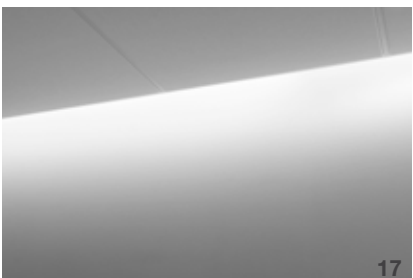

AMICA® 2




EQUATION® 2



LUNA® LED



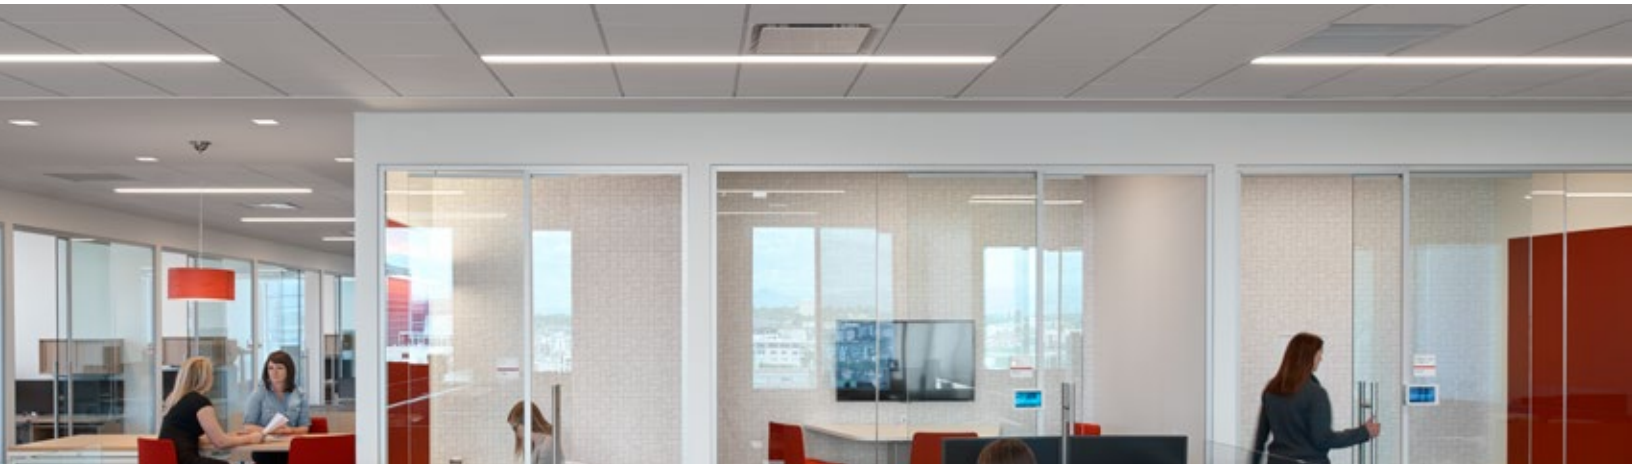


PROGRAMS



QS Quickship & Quickship **RED**

Give you the ability to meet tight project schedules without sacrificing quality or selection. Our on-site manufacturing capabilities allow us to provide a broad, made-to-order offering that ships in 2, 5 or 10 days. Refer to the Quickship guide for specific product lead times. focalpointlights.com/Quickship

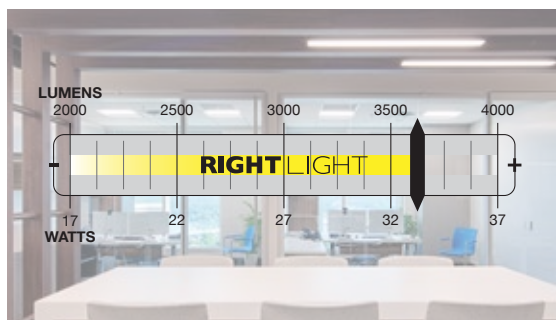

RL Right Light

Right Light ensures consistent delivered lumen outputs as technology upgrades occur. It also allows for custom programming of wattages and lumen outputs within the standard range.

focalpointlights.com/RightLight



PL Preferred Light

Focal Point Preferred Light uses advanced LED technology to deliver lighting that effectively renders color for human preference, creating more comfortable and visually appealing environments.


focalpointlights.com/PreferredLight



NS Connected Solutions

Connected Solutions is a broad range of smart luminaires that integrate with popular whole building lighting management systems. The luminaires and networked systems allow for the monitoring and modulation of light levels and temperature for personalized control, increasing the comfort and well-being of occupants, and resulting in time, energy, and cost savings.

focalpointlights.com/ConnectedSolutions

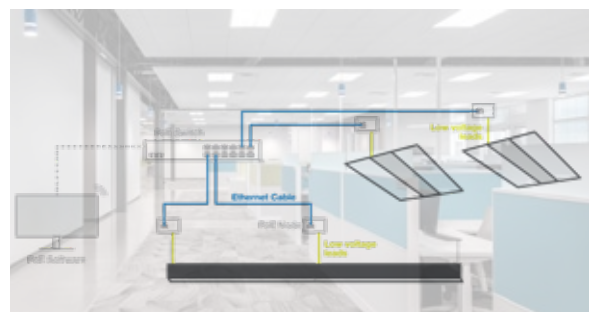

PoE Power over Ethernet (PoE)


Power over Ethernet (PoE) compatible luminaires integrate with building automation systems through standard Ethernet cables that provide low voltage power and data connection.

focalpointlights.com/PoE


SEEM[®] 1

A narrow, nominal 1.5" aperture LED luminaire that delivers design flexibility with a sleek visual aesthetic, Seem 1 supports diverse applications with modern finishes, individual lengths, and continuous runs in recessed and suspended mounting. Several shielding, color temperature, and direct only or indirect/direct distribution options provide the perfect blend of high performance and visual comfort.


- Nominal 1.5" aperture
- Flush, batwing, and asymmetric lens options
- Lumen output range*:
 - 125-1000lm/ft Indirect
 - 125-625lm/ft Direct
- Up to 125 LPW
- Individual units or continuous runs
- Recessed available for 9/16" & 15/16" lay-in and tegular grids, drywall and hard ceilings

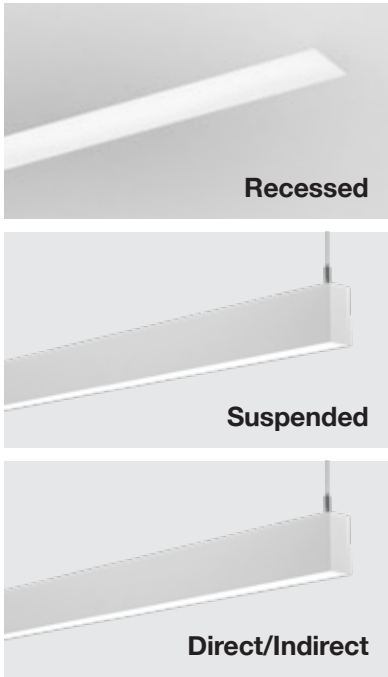


*Varies by luminaire

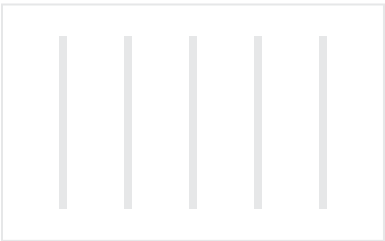

50' x 35' Room | 8' Spacing

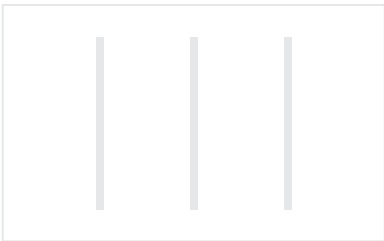

50' x 35' Room | 12' Spacing

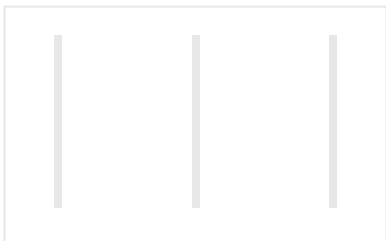

50' x 35' Room | 16' Spacing

SUGGESTED SPACING FOR REQUIRED ILLUMINATION LEVELS

Seem 1 Recessed

| Ceiling Height | Fixture Spacing | Lumens per Foot | Average Footcandles | Workplane Uniformity |
|----------------|-----------------|-----------------|---------------------|----------------------|
| 9' | 12' | 375 | 28 | 1:2 |
| | | 500 | 37 | |
| | | 625 | 47 | |
| | 14' | 375 | 27 | |
| | | 500 | 36 | |
| | | 625 | 45 | |
| 10' | 12' | 375 | 27 | |
| | | 500 | 36 | |
| | | 625 | 45 | |
| | 14' | 375 | 26 | |
| | | 500 | 34 | |
| | | 625 | 43 | |

Based on 3500k, 80 CRI, Flush Lens

Seem 1 Suspended

| Ceiling Height | Suspension | Fixture Spacing | Lumens per Foot | Average Footcandles | Workplane Uniformity |
|----------------|------------|-----------------|-----------------|---------------------|----------------------|
| 10' | 18" | 12' | 375 | 28 | 1:2 |
| | | | 500 | 37 | |
| | | | 625 | 45 | |
| | | 14' | 375 | 27 | |
| | | | 500 | 36 | |
| | | | 625 | 43 | |
| | | 16' | 500 | 26 | 1:4 |
| | | | 625 | 31 | |
| | | | 750 | 40 | |
| 10' | 24" | 12' | 375 | 29 | 1:2 |
| | | | 500 | 37 | |
| | | | 625 | 46 | |
| | | 14' | 375 | 28 | |
| | | | 500 | 37 | |
| | | | 625 | 44 | |
| | | 16' | 500 | 26 | 1:4 |
| | | | 625 | 32 | |
| | | | 750 | 41 | |
| 12' | 24" | 12' | 375 | 27 | 1:2 |
| | | | 500 | 36 | |
| | | | 625 | 45 | |
| | | 14' | 375 | 26 | |
| | | | 500 | 34 | |
| | | | 625 | 43 | |
| | | 16' | 500 | 24 | 1:3 |
| | | | 625 | 31 | |
| | | | 750 | 37 | |

Based on 3500k, 80 CRI, Flush Lens

Seem 1 Direct/Indirect - 24" Suspension


| Ceiling Height | Fixture Spacing | Indirect / Direct Shielding | Indirect Lumens per Foot | Direct Lumens per Foot | Average Footcandles | Workplane Uniformity | Ceiling Uniformity |
|----------------|-----------------|------------------------------|--------------------------|------------------------|---------------------|----------------------|--------------------|
| 11' | 8' | Batwing Optic / Flush Lens | 125 | 250 | 36 | 1:2 | 1:2 |
| | 12' | | | 375 | 35 | | |
| | 16' | | | 500 | 35 | | |
| | 8' | Batwing Optic / Batwing Lens | 125 | 250 | 37 | | |
| | 12' | | | 375 | 35 | | |
| | 16' | | | 500 | 35 | | |
| 12.5' | 8' | Batwing Optic / Flush Lens | 125 | 250 | 35 | | |
| | 12' | | | 375 | 33 | | |
| | 16' | | | 500 | 33 | | |
| | 8' | Batwing Optic / Batwing Lens | 125 | 250 | 36 | | |
| | 12' | | | 375 | 34 | | |
| | 16' | | | 500 | 34 | | |
| 14' | 8' | Batwing Optic / Flush Lens | 125 | 250 | 34 | | |
| | 12' | | | 375 | 32 | | |
| | 16' | | | 500 | 32 | | |
| | 8' | Batwing Optic / Batwing Lens | 125 | 250 | 34 | | |
| | 12' | | | 375 | 33 | | |
| | 16' | | | 500 | 33 | | |

Based on 3500k, 80 CRI

SEEM[®] 2


Seem 2 is a nominal 2.5" aperture luminaire designed to fit organically into architecture. Recessed, suspended and wall mount companions, in individual lengths and continuous runs, bring harmony to interior spaces with a selection of shielding, color temperature, and distribution options.

- Nominal 2.5" aperture
- Flush, batwing, asymmetric, and pop-down lens options
- Lumen output range*:
 - 250-1250lm/ft Indirect
 - 125-1000lm/ft Direct
- Up to 123 LPW
- Individual units or continuous runs
- Recessed available for 9/16" & 15/16" lay-in and tegular grids, drywall and hard ceilings

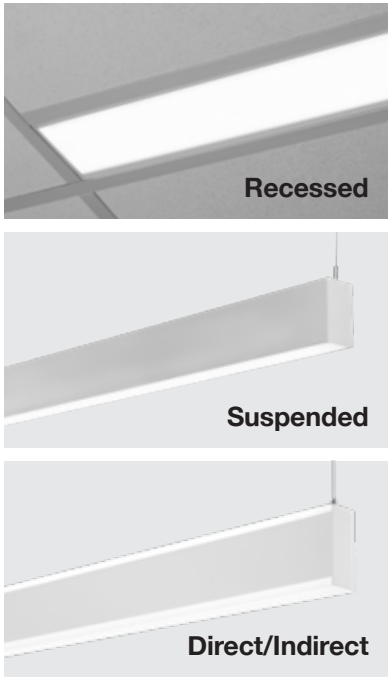


*Varies by luminaire


SUGGESTED SPACING FOR REQUIRED ILLUMINATION LEVELS

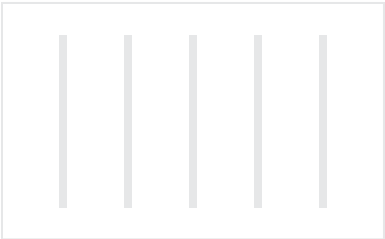

50' x 35' Room | 8' Spacing

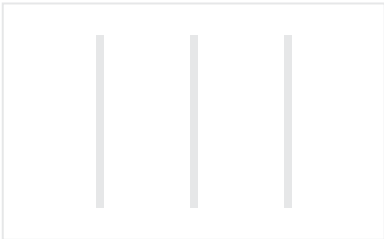

50' x 35' Room | 12' Spacing

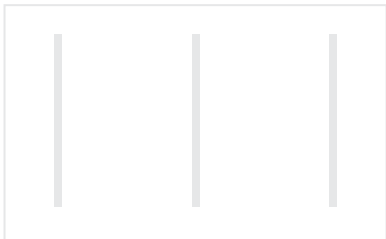

50' x 35' Room | 16' Spacing

Seem 2 Recessed

| Ceiling Height | Fixture Spacing | Lumens per Foot | Average Footcandles | Workplane Uniformity |
|----------------|-----------------|-----------------|---------------------|----------------------|
| 9' | 12' | 375 | 27 | 1:2 |
| | | 500 | 37 | |
| | | 625 | 46 | |
| | 14' | 375 | 26 | |
| | | 500 | 35 | |
| | | 625 | 44 | |
| 10' | 12' | 375 | 27 | 1:2 |
| | | 500 | 36 | |
| | | 625 | 45 | |
| | 14' | 375 | 26 | |
| | | 500 | 34 | |
| | | 625 | 42 | |

Based on 3500k, 80 CRI, Flush Lens

Seem 2 Suspended

| Ceiling Height | Suspension | Fixture Spacing | Lumens per Foot | Average Footcandles | Workplane Uniformity |
|----------------|------------|-----------------|-----------------|---------------------|----------------------|
| 10' | 18" | 12' | 375 | 27 | 1:2 |
| | | | 500 | 36 | |
| | | | 625 | 43 | |
| | | 14' | 375 | 26 | |
| | | | 500 | 35 | |
| | | | 625 | 41 | |
| | | 16' | 500 | 25 | 1:4 |
| | | | 625 | 30 | |
| | | | 750 | 39 | |
| 10' | 24" | 12' | 375 | 28 | 1:2 |
| | | | 500 | 37 | |
| | | | 625 | 44 | |
| | | 14' | 375 | 26 | |
| | | | 500 | 35 | |
| | | | 625 | 42 | |
| | | 16' | 500 | 26 | 1:4 |
| | | | 625 | 31 | |
| | | | 750 | 40 | |
| 12' | 24" | 12' | 375 | 27 | 1:2 |
| | | | 500 | 36 | |
| | | | 625 | 45 | |
| | | 14' | 375 | 26 | |
| | | | 500 | 34 | |
| | | | 625 | 42 | |
| | | 16' | 500 | 25 | 1:3 |
| | | | 625 | 31 | |
| | | | 750 | 38 | |

Based on 3500k, 80 CRI, Flush Lens

Seem 2 Direct/Indirect - 24" Suspension


| Ceiling Height | Fixture Spacing | Indirect / Direct Shielding | Indirect Lumens per Foot | Direct Lumens per Foot | Average Footcandles | Workplane Uniformity | Ceiling Uniformity |
|----------------|-----------------|------------------------------|--------------------------|------------------------|---------------------|----------------------|--------------------|
| 11' | 8' | Batwing Optic / Flush Lens | 125 | 250 | 36 | 1:2 | 1:2 |
| | 12' | | | 375 | 35 | | |
| | 16' | | | 500 | 35 | | |
| | 8' | Batwing Optic / Batwing Lens | 125 | 250 | 37 | | |
| | 12' | | | 375 | 35 | | |
| | 16' | | | 500 | 35 | | |
| 12.5' | 8' | Batwing Optic / Flush Lens | 125 | 250 | 35 | | |
| | 12' | | | 375 | 33 | | |
| | 16' | | | 500 | 33 | | |
| | 8' | Batwing Optic / Batwing Lens | 125 | 250 | 36 | | |
| | 12' | | | 375 | 34 | | |
| | 16' | | | 500 | 34 | | |
| 14' | 8' | Batwing Optic / Flush Lens | 125 | 250 | 34 | | |
| | 12' | | | 375 | 32 | | |
| | 16' | | | 500 | 32 | | |
| | 8' | Batwing Optic / Batwing Lens | 125 | 250 | 34 | | |
| | 12' | | | 375 | 33 | | |
| | 16' | | | 500 | 33 | | |

Based on 3500k, 80 CRI


SEEM® 4

A 4" aperture luminaire with an unobtrusive aesthetic, Seem 4 recessed, suspended, and surface mount companions blend harmoniously to fulfill all lighting applications of a space. Individual units and continuous runs bring unity to interior spaces with modern finishes and a vast selection of shielding, color temperature, and light distribution options.


- Nominal 4" aperture
- Flush, pop-up, and pop-down lens options
- Lumen output range*:
 - 275-1250lm/ft Indirect
 - 275-1250lm/ft Direct
- Up to 125 LPW
- Individual units or continuous runs
- Recessed available for 9/16" & 15/16" lay-in and tegular grids, drywall and hard ceilings

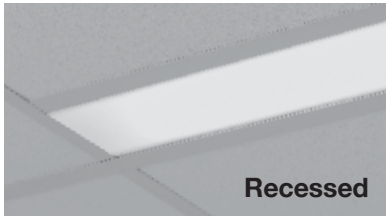

Recessed

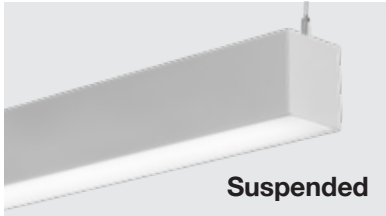


Suspended

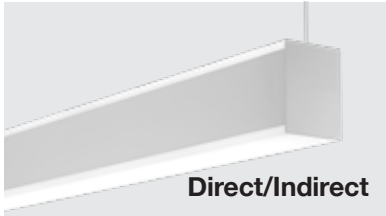


Direct/Indirect

*Varies by luminaire


SUGGESTED SPACING FOR REQUIRED ILLUMINATION LEVELS

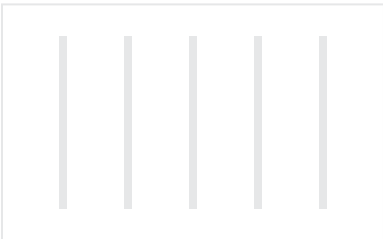

50' x 35' Room | 8' Spacing

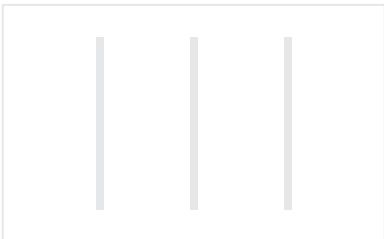

50' x 35' Room | 12' Spacing

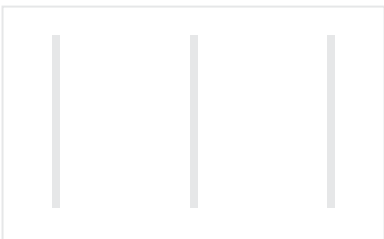

50' x 35' Room | 16' Spacing



| Seem 4 Recessed | | | Seem 4-LP | | Workplane Uniformity |
|-----------------|-----------------|-----------------|---------------------|---------------------|----------------------|
| Ceiling Height | Fixture Spacing | Lumens per Foot | Average Footcandles | Average Footcandles | |
| 9' | 12' | 375 | 26 | 28 | |
| | | 625 | 44 | 52 | |
| | 14' | 375 | 25 | 26 | |
| | | 625 | 42 | 49 | |
| 10' | 12' | 375 | 26 | 27 | 1:2 |
| | | 625 | 41 | 50 | |
| | 14' | 375 | 25 | 25 | |
| | | 625 | 39 | 48 | |

Based on 3500k, 80 CRI, Flush Lens

Seem 4 Suspended

| Ceiling Height | Suspension | Fixture Spacing | Lumens per Foot | Average Footcandles | Workplane Uniformity |
|----------------|------------|-----------------|-----------------|---------------------|----------------------|
| 10' | 18" | 12' | 375 | 26 | 1:2 |
| | | | 625 | 43 | |
| | | 14' | 375 | 25 | |
| | | | 625 | 41 | |
| | | 16' | 625 | 30 | 1:3 |
| | | | | | |
| 10' | 24" | 12' | 375 | 26 | 1:2 |
| | | | 625 | 44 | |
| | | 14' | 375 | 25 | |
| | | | 625 | 42 | |
| | | 16' | 625 | 31 | 1:3 |
| | | | | | |
| 12' | 24" | 12' | 375 | 25 | 1:2 |
| | | | 625 | 41 | |
| | | 14' | 375 | 23 | |
| | | | 625 | 39 | |
| | | 16' | 625 | 38 | 1:3 |
| | | | | | |

Based on 3500k, 80 CRI, Flush Lens

Seem 4 Direct/Indirect - 24" Suspension

| Ceiling Height | Fixture Spacing | Indirect / Direct Shielding | Indirect Lumens per Foot | Direct Lumens per Foot | Average Footcandles | Workplane Uniformity | Ceiling Uniformity |
|----------------|-----------------|------------------------------|--------------------------|------------------------|---------------------|----------------------|--------------------|
| 11' | 8' | Batwing Optic / Flush Lens | 125 | 250 | 36 | 1:2 | 1:2 |
| | 12' | | | 375 | 35 | | |
| | 16' | | | 500 | 35 | | |
| | 8' | Batwing Optic / Batwing Lens | 125 | 250 | 37 | | |
| | 12' | | | 375 | 35 | | |
| | 16' | | | 500 | 35 | | |
| 12.5' | 8' | Batwing Optic / Flush Lens | 125 | 250 | 35 | | |
| | 12' | | | 375 | 33 | | |
| | 16' | | | 500 | 33 | | |
| | 8' | Batwing Optic / Batwing Lens | 125 | 250 | 36 | | |
| | 12' | | | 375 | 34 | | |
| | 16' | | | 500 | 34 | | |
| 14' | 8' | Batwing Optic / Flush Lens | 125 | 250 | 34 | | |
| | 12' | | | 375 | 32 | | |
| | 16' | | | 500 | 32 | | |
| | 8' | Batwing Optic / Batwing Lens | 125 | 250 | 34 | | |
| | 12' | | | 375 | 33 | | |
| | 16' | | | 500 | 33 | | |

Based on 3500k, 80 CRI

SEEM[®] 6

RECESSED


A 6" aperture recessed slot LED luminaire, Seem 6 integrates with grid, drywall, and hard ceilings with individual units and continuous runs in 1" increments. A frosted acrylic lens provides uninterrupted illumination without pixels or shadows.




- Nominal 6" aperture
- Lumen output range: 375-1000lm/ft
- Up to 83 LPW
- Individual units or continuous runs in 1" increments
- Available for 9/16" & 15/16" lay-in and tegular grids, drywall and hard ceilings
- Compatible with common pre-engineered grid ceiling systems requiring luminaires fitting into a 4" slot.



SUGGESTED SPACING FOR REQUIRED ILLUMINATION LEVELS

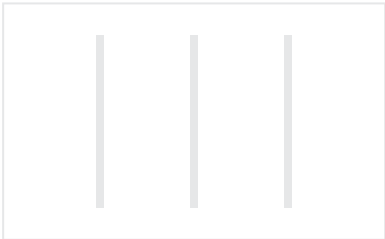

50' x 35' Room | 12' Spacing

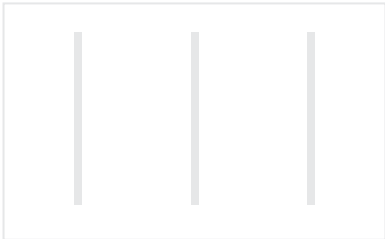

50' x 35' Room | 14' Spacing

Seem 6 Recessed

| Ceiling Height | Fixture Spacing | Lumens per Foot | Average Footcandles | Workplane Uniformity |
|----------------|-----------------|-----------------|---------------------|----------------------|
| 9' | 12' | 375 | 26 | 1:2 |
| | | 625 | 43 | |
| | 14' | 375 | 25 | |
| | | 625 | 41 | |
| 10' | 12' | 375 | 25 | |
| | | 625 | 42 | |
| | 14' | 375 | 24 | |
| | | 625 | 40 | |


Based on 3500k, 80 CRI, Flush Lens

TWELVE LED

SUSPENDED

With a low profile and a timeless design, Twelve is a versatile solution to illuminate any interior. It offers superior performance, a direct/indirect distribution, and uniform illumination.


- Up to 121 LPW
- Lumen output range: 750–1250 lm/ft
- Acrylic or MicroGlow diffuser options
- Gradient optic diffuses lateral distribution to eliminate harsh lines on vertical surfaces
- Ideal for low-ceiling applications

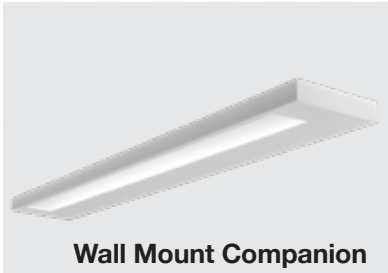


SUGGESTED SPACING FOR REQUIRED ILLUMINATION LEVELS



50' x 35' Room | 10' Spacing

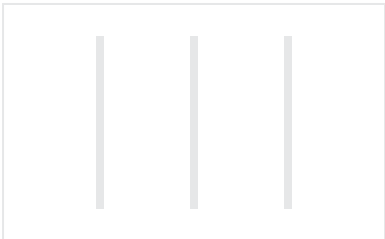

50' x 35' Room | 12' Spacing

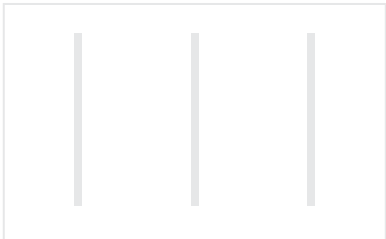

50' x 35' Room | 14' Spacing



| Ceiling Height | Suspension | Fixture Spacing | Lumens per Foot | Average Footcandles | Ceiling Uniformity | Workplane Uniformity |
|----------------|------------|-----------------|-----------------|---------------------|--------------------|----------------------|
| 10' | 18" | 10' | 750 | 42 | 1:9 | 1:2 |
| | | 12' | 750 | 37 | | |
| | | 14' | 750 | 38 | 1:6 | |
| | 24" | 10' | 750 | 45 | 1:3 | |
| | | 12' | 750 | 40 | | |
| | | 14' | 750 | 38 | 1:4 | |
| 12' | 24" | 10' | 750 | 47 | 1:2 | 1:3 |
| | | 12' | 750 | 37 | 1:3 | |
| | | 14' | 750 | 35 | | |



Based on 3500k, 80 CRI

ID+ 3.5" DOWNLIGHTS

The ID+ 3.5" family of downlights was designed with flexibility in mind. It offers multiple lumen outputs, round and square trim options, various beam spreads, and interchangeable wall washers and downlights that can be swapped in the field, post-installation.


- Low profile to accommodate shallow plenum applications
- Downlight, wall wash, and adjustable accent
- Up to 96 LPW
- Lumen output range*: 700–2100 lm
- Round and square trim options
- Clear diffuse, warm diffuse, white and black finish options

*Varies by luminaire

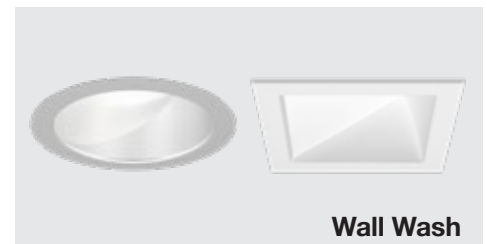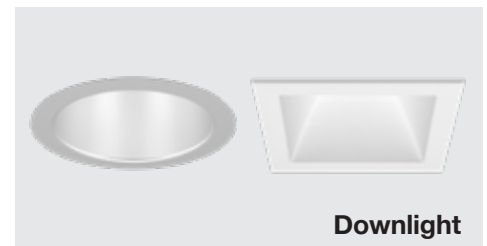

| Trim | Distribution | Spacing Criterion (SC) |
|--------------------------|-----------------------------|------------------------|
| Round Overlap | ▲ 24° Narrow Flood | 0.42 |
| | ▲ 34° Flood 1 | 0.62 |
| | ▲ 47° Flood 2 | 0.72 |
| | ▲ 54° Wide Flood | 0.89 |
| | ▲ 65° Very Wide Flood | 1.02 |
| | ▼ Wall Wash | 1.02 |
| Square Overlap | ▲ 24° Narrow Flood | 0.42 |
| | ▲ 34° Flood 1 | 0.56 |
| | ▲ 45° Flood 2 | 0.70 |
| | ▲ 59° Wide Flood | 0.85 |
| | ▲ 72° Very Wide Flood | 0.97 |
| | ▼ Wall Wash | 1.00 |
| Round Adjustable Accent | ▼ 15° Spot | 0.26 |
| | ▼ 18° Spot with Solite Lens | 0.32 |
| | ▼ 25° Narrow Flood | 0.56 |
| | ▼ 40° Flood | 0.60 |
| | ■ 30° x 15° Linear Spread | 0.86 |
| Square Adjustable Accent | ▼ 15° Spot | 0.28 |
| | ▼ 18° Spot with Solite Lens | 0.32 |
| | ▼ 25° Narrow Flood | 0.46 |
| | ▼ 45° Flood | 0.68 |
| | ■ 30° x 15° Linear Spread | 0.88 |

Based on Short Cone with 60° cut-off

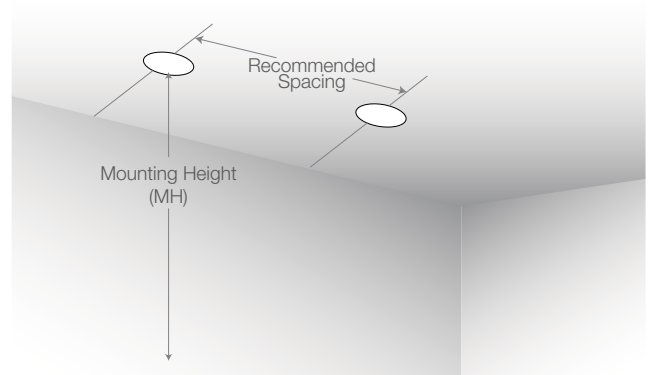

Calculating Recommended Spacing

Mounting Height (MH) x Spacing Criterion (SC) = Recommended spacing

Example: 9' (MH) x 0.82 (SC) = Recommended Spacing 7.38' (7' 4")





ID+ 4.5" DOWNLIGHTS

The ID+ 4.5" downlight and wall wash were thoughtfully engineered. A universal housing and interchangeable trims allow for design changes in the field. A variety of lens and lumen output options allow to meet the requirements of each individual space.


- Lumen output range*: 1000–3000 lm
- Up to 92 LPW
- Field adjustability to accommodate ceiling thicknesses from 0.5" to 3.0"
- Round and square trim options
- Clear diffuse, warm diffuse, white and black finish options

*Varies by luminaire

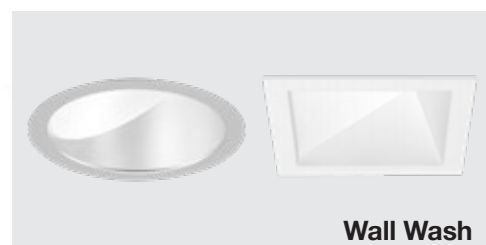

| Trim | Distribution | Spacing Criterion (SC) |
|----------------|--------------------|------------------------|
| Round Overlap | ▲ 19° Spot | 0.32 |
| | ▲ 24° Narrow Flood | 0.42 |
| | ▲ 34° Flood 1 | 0.54 |
| | ▲ 44° Flood 2 | 0.68 |
| | ▲ 59° Wide Flood | 0.92 |
| | ▼ Wall Wash | 0.68 |
| Square Overlap | ▲ 18° Spot | 0.32 |
| | ▲ 23° Narrow Flood | 0.40 |
| | ▲ 34° Flood 1 | 0.56 |
| | ▲ 45° Flood 2 | 0.72 |
| | ▲ 52° Wide Flood | 0.86 |
| | ▼ Wall Wash | 1.00 |

Based on 1000-2500 Lumen outputs

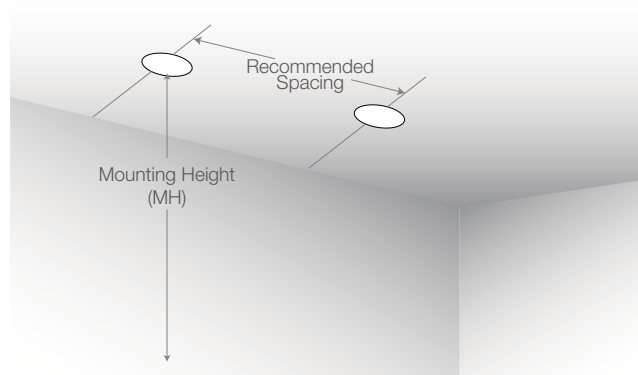

Calculating Recommended Spacing

Mounting Height (MH) x Spacing Criterion (SC) = Recommended spacing

Example: 9' (MH) x 1.08 (SC) = Recommend Spacing 9.72' (9'9")




ID+ 3.5" CYLINDERS

Designed to provide a companion to the 3.5" trimless downlights, with matching aperture sizes, the cylinders add a touch of sophistication to commercial spaces. They provide design flexibility for open ceiling applications with multiple lumen outputs, various beam spreads, and custom RAL colors.

- Suspended or surface mount
- 80 and 90 CRI
- Lumen output range: 700 - 2000 lm
- Up to 96 LPW
- Decorative reveal with optional glowing or non-glow reveal
- Shallow and power canopy options
- White, black, and palladium silver exterior finish options or specify with custom RAL color
- Narrow flood to super wide flood distribution options



| Trim | Distribution | Spacing Criterion (SC) |
|-------------------|------------------------|------------------------|
| 700 lm to 2000 lm | ▲ 28° Narrow Flood | 0.50 |
| | ▲ 34° Flood 1 | 0.59 |
| | ▲ 45° Flood 2 | 0.75 |
| | ▲ 57° Wide Flood | 0.80 |
| | ▲ 89° Super Wide Flood | 1.24 |

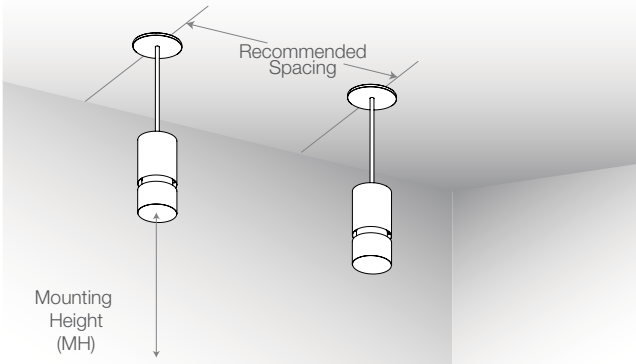

Calculating Recommended Spacing

Mounting Height (MH) x Spacing Criterion (SC) = Recommended spacing
Example: 8' (MH) x 0.59 (SC) = Recommend Spacing 4.72' (4' 9")

ID+ 4.5" CYLINDERS

A companion to the 4.5" downlights, these cylinders with a single-piece die-cast reflector, featuring a knife edge and decorative reveal, add a sophisticated aesthetic to commercial spaces. Engineered for easy installation and maintenance, with field changeable reflector and optic, ID+ cylinders accommodate design changes using a simple twist & lock mechanism.




- Suspended or surface mount
- 80 and 90 CRI
- Lumen output range: 1000 - 3000 lm
- Up to 91 LPW
- Decorative reveal with optional glowing or non-glow reveal
- Shallow and power canopy options
- White, black, and palladium silver exterior finish options or specify with custom RAL color
- Spot to super wide flood distribution options



10-day

| Trim | Distribution | Spacing Criterion (SC) |
|--------------------|------------------------|------------------------|
| 1000 lm to 1500 lm | ▲ 18° Spot | 0.33 |
| | ▲ 27° Narrow Flood | 0.48 |
| | ▲ 35° Flood | 0.59 |
| | ▲ 54° Wide Flood | 0.83 |
| | ▲ 69° Very Wide Flood | 1.02 |
| | ▲ 98° Super Wide Flood | 1.34 |
| 2000 lm to 3000 lm | ▲ 26° Narrow Flood | 0.44 |
| | ▲ 41° Flood | 0.67 |
| | ▲ 56° Wide Flood | 0.83 |
| | ▲ 69° Very Wide Flood | 1.08 |
| | ▲ 98° Super Wide Flood | 1.34 |

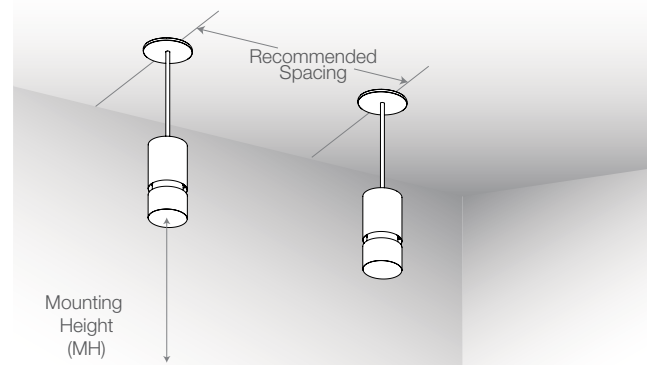

Calculating Recommended Spacing

Mounting Height (MH) x Spacing Criterion (SC) = Recommended spacing

Example: 8' (MH) x 1.08 (SC) = Recommend Spacing 8.64' (8' 8")

COVERT LITE®

Covert Lite provides a fixed cove lighting solution to highlight architectural details in commercial and hospitality spaces. The petite luminaire delivers even illumination with high lumen outputs, resulting in superior performance and visual comfort.




- Low profile to accommodate cove architectures from 4" to 24" in height
- Up to 105 LPW
- Lumen output range: 500–1200 lm/ft
- Individual or continuous linear runs in 1' increments
- Compatible with drywall, grid, and industry leading, commercial pre-engineered aluminum extruded ceiling cove system
- Installation and maintenance made easy with below ceiling driver access



SUGGESTED USE FOR REQUIRED ILLUMINATION LEVELS

| Lumens per Foot | Floor Footcandles | Floor Uniformity | Ceiling Uniformity |
|-----------------|-------------------|------------------|--------------------|
| 500 | 27 | 1:2 | 1:3 |
| 750 | 41 | | |


Based on 9' ceiling height



12' x 6' Corridor

FOCUS WALL WASH

A low-profile perimeter luminaire with a fully concealed indirect optic, Focus Wall Wash delivers shadow-free, wall-to-wall illumination. It creates the appearance of a floating ceiling, while illuminating the walls and defining the space.

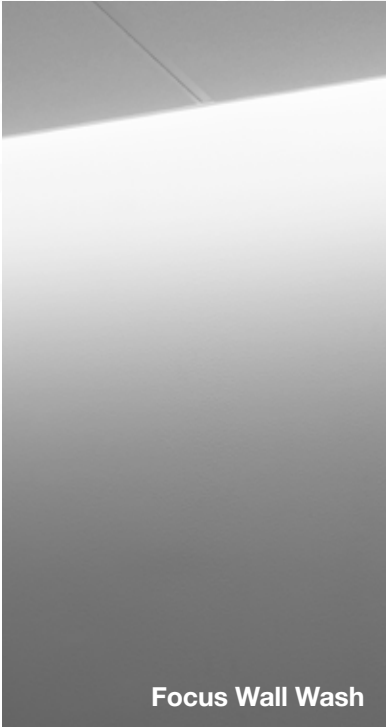


- Low profile to accommodate shallow plenum applications
- Up to 100 LPW
- Lumen output range: 250–950 lm/ft
- Infinite lengths with the ability to create patterns with 90° inside or outside corners
- Rough-in housing with separate snap-in LED light module
- Integrated sliding sleeve ensures precise installation and field adjustability
- Hidden optics and mechanical elements for a seamless appearance and continuous illumination



SUGGESTED USE FOR REQUIRED ILLUMINATION LEVELS

| Lumens per Foot | Wall | | Floor | |
|-----------------|-------------|------------|-------------|------------|
| | Footcandles | Uniformity | Footcandles | Uniformity |
| 450 | 14 | 1:2 | 9 | 1:2 |
| 650 | 20 | | 13 | |
| 800 | 24 | | 16 | |
| 950 | 29 | | 19 | |


Based on 9' ceiling height



12' x 6' Corridor

AMICA[®] 2

A versatile architectural troffer designed for shallow plenum applications, Amica 2 offers even illumination, high efficacy, a broad selection of lumen outputs, all at a very competitive price point.


- Up to 140 LPW
- Lumen output range: 2000–8000 lm
- Accommodates shallow plenum applications 
- Easy maintenance with below ceiling access of LED boards and drivers
- Tight fit of the lens to the angular housing prevents light leak and promotes safety
- Multiple mounting options: recessed, suspended, or surface mount




1x2



1x4

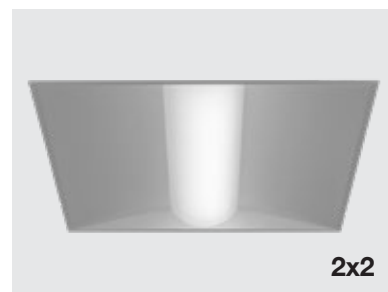

2x2

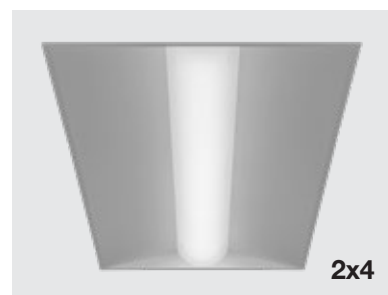


2x4

SUGGESTED SPACING FOR REQUIRED ILLUMINATION LEVELS

| Ceiling Height | Fixture Spacing | Size | Lumen Output (lm) | Average Footcandles | Workplane Uniformity |
|----------------|-----------------|------|-------------------|---------------------|----------------------|
| 9' | 8' x 8' | 2x2 | 2500 | 31 | 1:2 |
| | | | 3000 | 37 | 1:3 |
| | 10' x 10' | 1x4 | 4000 | 35 | 1:2 |
| | | | 4500 | 40 | |
| | | 2x2 | 3500 | 30 | 1:2 |
| | | | 4000 | 33 | |
| | | 2x4 | 4000 | 36 | 1:2 |
| | | | 4500 | 40 | |
| | 12' x 12' | 1x4 | 5000 | 30 | 1:3 |
| | | | 5500 | 33 | |
| | | | 6000 | 36 | |
| | | 2x4 | 5500 | 32 | 1:2 |
| | | | 6000 | 35 | |
| | | | 6000 | 35 | |
| 10' | 8' x 8' | 2x2 | 2500 | 30 | 1:2 |
| | | | 3000 | 36 | 1:3 |
| | 10' x 10' | 1x4 | 4000 | 34 | 1:2 |
| | | | 4500 | 39 | |
| | | 2x2 | 4000 | 32 | 1:2 |
| | | | 4500 | 35 | |
| | | 2x4 | 4000 | 35 | 1:2 |
| | | | 4500 | 39 | |
| | 12' x 12' | 1x4 | 5500 | 32 | 1:2 |
| | | | 6000 | 35 | |
| | | 2x4 | 5500 | 31 | 1:2 |
| | | | 6000 | 34 | |

Based on 3500k, 80 CRI

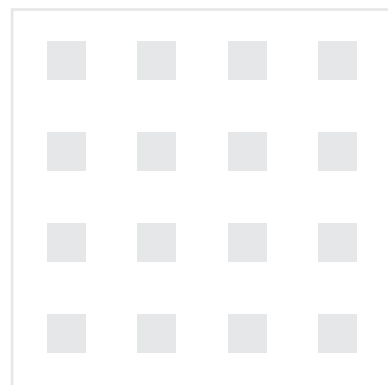


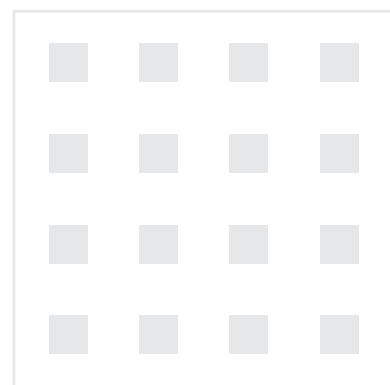
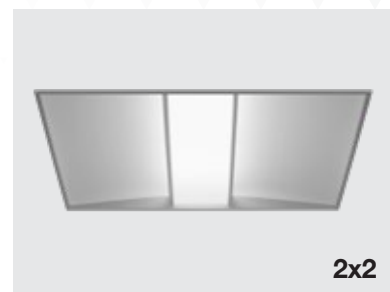
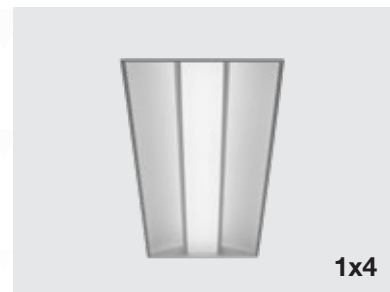
50' x 50' Room | 10' x 10' O.C. Spacing



EQUATION[®] 2

An efficient luminaire with a sleek aesthetic, Equation 2 is offered in a variety of sizes and mounting options. It is ideal for commercial offices, hospitality, educational and healthcare applications.

- Up to 129 LPW
- Lumen output range: 1000–8500 lm
- Accommodates shallow plenum applications* 
- Easy maintenance with below ceiling access of LED boards and drivers
- MicroGlow or Opal lens options
- Multiple mounting options: recessed, suspended, or surface mount



50' x 50' Room | 10' x 10' O.C. Spacing

SUGGESTED SPACING FOR REQUIRED ILLUMINATION LEVELS

| Ceiling Height | Fixture Spacing | Size | Lumen Output (lm) | Average Footcandles | Workplane Uniformity |
|----------------|-----------------|------|-------------------|---------------------|----------------------|
| 9' | 8' x 8' | 1x4 | 2500 | 34 | 1:2 |
| | | 2x2 | 2500 | 34 | 1:2 |
| | 10' x 10' | 1x4 | 3500 | 32 | 1:2 |
| | | | 4000 | 37 | |
| | | 2x2 | 3500 | 32 | 1:3 |
| | | | 4000 | 37 | |
| | | 2x4 | 4000 | 39 | 1:2 |
| | | | 4000 | 39 | |
| | 12' x 12' | 1x4 | 5000 | 30 | 1:3 |
| | | | 5000 | 31 | |
| 10' | 8' x 8' | 1x4 | 2500 | 33 | 1:2 |
| | | | 3000 | 40 | |
| | | 2x2 | 2500 | 34 | 1:2 |
| | | | 3000 | 40 | |
| | 10' x 10' | 1x4 | 3500 | 32 | 1:2 |
| | | | 4000 | 36 | |
| | | 2x2 | 3500 | 31 | 1:2 |
| | | | 4000 | 36 | |
| | | 2x4 | 4000 | 38 | 1:2 |
| | | | 4000 | 38 | |
| | 12' x 12' | 2x4 | 5000 | 30 | 1:3 |
| | | | 5500 | 33 | |
| | | | 6000 | 36 | |

Based on 3500k, 80 CRI

*Except 1x1




LUNA® LED

A classic design providing exceptional visual comfort, Luna features a curved, one-piece housing with a perforated center basket and frosted side diffusers. It delivers a high-angle, uniform distribution, making it ideal for corridors, lobbies and offices.

- Up to 95 LPW
- Lumen output range: 2000–7000 lm
- Multiple mounting options: recessed, suspended, or surface mount



1x4

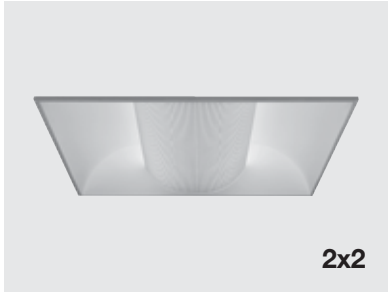

2x2




2x4

SUGGESTED SPACING FOR REQUIRED ILLUMINATION LEVELS

| Ceiling Height | Fixture Spacing | Size | Lumen Ouput (lm) | Average Footcandles | Workplane Uniformity |
|----------------|-----------------|------|------------------|---------------------|----------------------|
| 9' | 8' x 8' | 1x4 | 2500 | 39 | 1:2 |
| | | | 3000 | 39 | |
| | | 2x2 | 2500 | 32 | |
| | | | 3000 | 38 | |
| | 10' x 10' | 1x4 | 2500 | 32 | 1:3 |
| | | | 3500 | 32 | |
| | | 2x2 | 3500 | 31 | 1:2 |
| | | | 4000 | 36 | |
| | | 2x4 | 4500 | 40 | |
| | | | 5000 | 31 | |
| 10' | 8' x 8' | 2x4 | 5500 | 33 | 1:3 |
| | | | 5500 | 33 | |
| | | 1x4 | 2500 | 32 | 1:2 |
| | | | 3000 | 38 | |
| | | | 2500 | 31 | |
| | | | 3000 | 38 | |
| | 10' x 10' | 1x4 | 3500 | 31 | |
| | | | 3500 | 30 | |
| | 12' x 12' | 2x4 | 5500 | 32 | 1:3 |
| | | | 5500 | 32 | |

Based on 3500k, 80 CRI

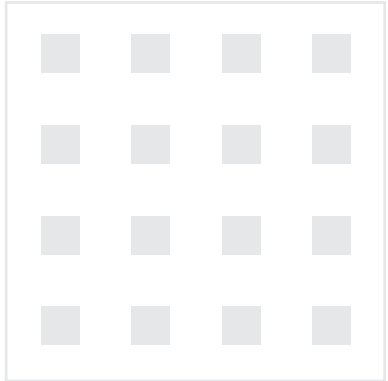

50' x 50' Room | 10' x 10' O.C. Spacing

BRING IT ALL TO YOUR JOB SITE

focalpointlights.com/contractorzone



FOCAL POINT®



Bringing It All To Light®

4141 S. Pulaski Rd. Chicago, IL 60632 773.247.9494 | focalpointlights.com

©2021 Focal Point, LLC. 4141 S. Pulaski Road, Chicago, IL 60632 | T 773.247.9494 | www.focalpointlights.com
All rights reserved. "Focal Point", "Bringing It All To Light", "Equation", "Amica", "Luna", "Seem", "Covert Lite", "Connected Solutions", "Preferred Light", and the light-ray graphic are registered trademarks of Focal Point, LLC. Visit focalpointlights.com for specifications and other details on our entire Focal Point catalog.

02/21 MKT1138