

TRAC E

TM




FOCAL POINT®

OUTLINE AND OUTSHINE.

Trace your designs and define the transition from wall to ceiling with a glow.

FEATURES

- Narrow 3.5" aperture
- Creates floating ceiling effect without building a cove
- Shadow-free continuous illumination and pleasant perimeter glow
- 90 degree corners and sliding sleeves for wall-to-wall installation
- A frosted lens with linear rib pattern obscures LEDs and allows comfortable viewing at any angle

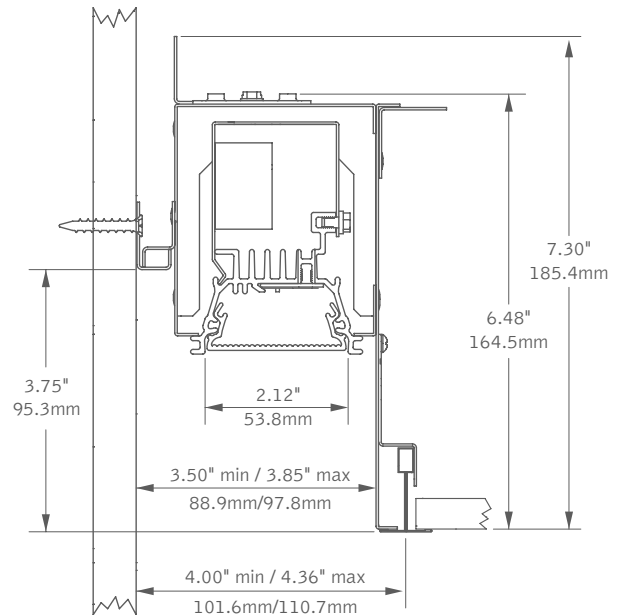

LED DETAILS

- 3000K or 3500K, CRI>80
- 5.7 watts and 300 delivered lumens per foot
- 0-10V - 10% dimming standard
- L70 at 50,000 hours, 5 year warranty
- Replaceable LED modules and drivers




When compared to traditional fluorescent perimeter systems, Trace offers equivalent illumination with an **ENERGY SAVINGS OF UP TO 50%.**

COMPARISON

		average footcandles	uniformity (avg/min)	watts/sq ft.
FLOOR	Trace	16.63	1.85	0.958
	Focus IV (1T8)	14.90	1.35	1.458
WALL	Trace	24.26	8.09	
	Focus IV (1T8)	13.84	4.61	

PERFORMANCE

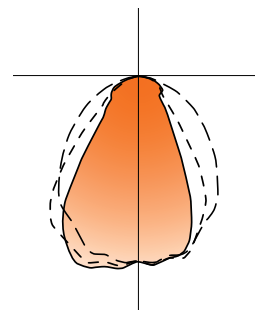


4' Luminaire
 Delivered Lumens: 1207lm
 Tested System Watts: 22.9W

6' corridor, 9' ceiling | 80/50/20 reflectances


Photometric performance is measured in accordance with IESNA LM-79.

INSTALLATION DETAILS



GRID CEILING

15/16" or 9/16" Flat Tee
main runner required.




DRYWALL/HARD CEILING

Ceiling mounts below housing,
finish by others.


OUTSIDE & INSIDE CORNER

3" min / 6" max

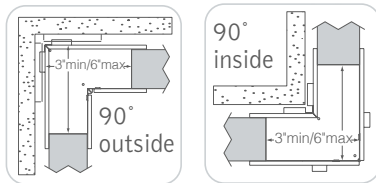


SLIDING SLEEVE (ss)

6" max




SLIDING SLEEVE PAIR (ssb)

Recommended to finish incremental lengths of 6' or more.



FEED LOCATION

LED module requires an individual fed.



ORDERING

luminaire series	FTRL	<u>FTRL</u>
Trace	FTRL	
shielding		<u>AC</u>
Frosted Acrylic Diffuser	AC	
led system		<u>LL1</u>
Standard Output	LL1	
color temperature		_____
3000K	L30	
3500K	L35	
circuits		<u>1C</u>
Single Circuit	1C	
voltage		_____
120 Volt	120	
277 Volt	277	
driver		<u>LD1</u>
0-10V - 10% Dimming	LD1	
mounting		_____
Grid	G	
Drywall	XF	
factory options		_____
Chicago Plenum	CP	
Emergency Circuit	EC	
Flanged Ends	FL	
HLR/GLR Fuse	FU	
Sliding Sleeve	SS	
Sliding Sleeve Pair (3' minimum length)	SSB	
finish		<u>WH</u>
Matte White Housing	WH	
luminaire length		_____
Specify luminaire/row length in 1' increments (2' minimum)	XX'	
corner options		_____
90-degree Inside Corner	FTRL-IC90	
90-degree Outside Corner	FTRL-OC90	



[Follow @focalpointlight](https://twitter.com/focalpointlight)

©2015 Focal Point, LLC., 4141 S. Pulaski Road, Chicago, IL 60632 T 773.247.9494 | www.focalpointlights.com

All rights reserved. "Focal Point", "The Art of Light", "Trace" and the light-ray graphic are trademarks or registered trademarks of Focal Point, LLC. Visit focalpointlights.com for specification and other details on our entire Focal Point catalog.