

SEEM[®] 2 PERIMETER vs. TRACE



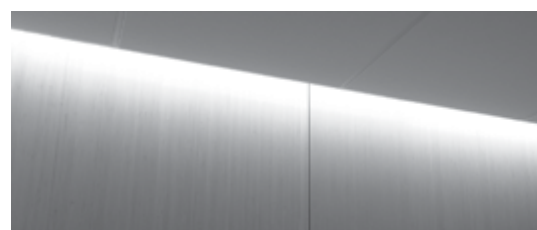
Seem 2 Perimeter is a new, competitively priced perimeter lighting solution that defines and enhances spaces with greater flexibility. The narrow aperture LED luminaire offers additional options such as 1" increment lengths, illuminated corners, expanded CRI, CCT, and controls compatibility. It is designed to fit in grid, drywall, or hard surface ceilings with simplified installation. This high-performance luminaire provides a glowing transition between the ceiling and walls, ideal for corridors and elevator lobbies.





Learn more about how this enhanced luminaire expands on the features of Trace while addressing the needs of today's architectural spaces.

SEEM 2 PERIMETER



TRACE (Discontinued May 1ST 2020)



Housing	Fixed Adjustable			Fixed	
Regress depth options	 Flush	 2.50"	 4.00"	 2.60"	
Lens aperture	2.00"			2.12"	
Slot width	3.15 - 3.50"			3.50 - 3.85"	
Power feed requirements	One per run			One per fixture	
Lumen outputs	125lm/ft @ 96 LPW 250lm/ft @ 80 LPW 375lm/ft @ 79 LPW 625lm/ft @ 76 LPW			300lm/ft @ 53 LPW	
CRI & CCT options	80 CRI		2700K, 3000K	80 CRI	3000K
	90 CRI		3500K, 4000K		3500K, 4000K
Control & dimming options	0-10 Volt: LD1, L11 Lutron: LH1, LU5 DALI: D11 Connected Solutions			0-10 Volt: LD1	
Mounting options	Lay In Grid Slot Tee / Tegular Grid Trim Flange Drywall Trimless Drywall			Lay In Grid Drywall	
Factory options	Unlit Sliding Sleeves Chicago Plenum Emergency Battery Emergency Circuit			Unlit Sliding Sleeves Chicago Plenum Emergency Circuit	
Length increments	1" continuous			2' modular	
Corners	Illuminated			Non-illuminated	
Lumen maintenance	L70: 270,000 hours			L70: 50,000 hours	