




Amica® 2 1x4

LED

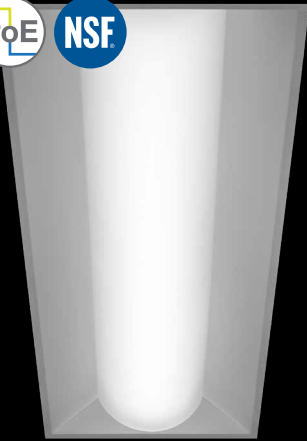


lens detail




air return


DIMENSIONAL DATA

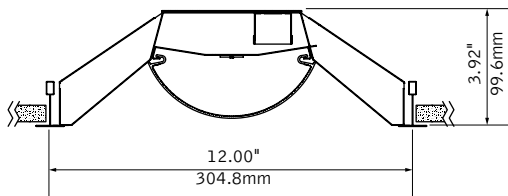

led options

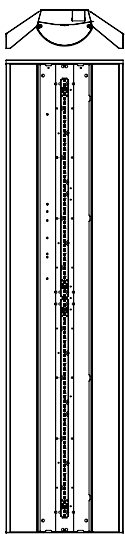

Standard
(1 LED Board)



High Efficiency
(2 LED Boards)

FEATURES

Architectural recessed LED luminaire with classic lines to complement architecture.

Center ribbed diffuser masks LED brightness to create even illumination.


3.9" housing depth ideal for shallow plenum applications.

Access from below the ceiling for easy maintenance.

Connected Solutions: Integrates with wired and wireless building control systems.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

PERFORMANCE



PRODUCT OVERVIEW

Lumen Output: 4000-8000lm

Wattage: 30-63

LPW: 124-134

SDCM: 3

High Performance
4000 Lumens (4000LH)

Delivered Lumens: 4000lm


Total System Watts: 30W

Photometric performance is measured in accordance with IESNA LM-79. Visit focalpointlights.com for complete photometric data.

fixture:

project:

MOUNTING INFORMATION

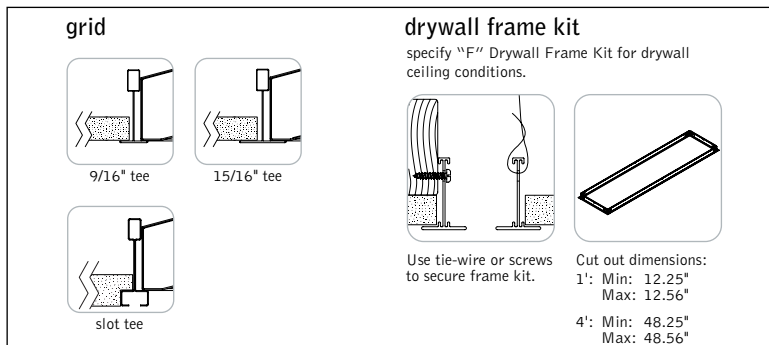

SPECIFICATIONS

LED System

LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 3000K, 3500K or 4000K with CRI>80, 3 SDCM. LED modules and drivers are replaceable from below.

Construction

One piece 24 Ga. steel reflector and housing. Bottom access 24 Ga. steel driver compartment. Top access plate for electrical connection. Positional brackets supplied as standard. Unit weight: 11.7 lbs.

Optic

24 Ga. steel reflectors finished in matte satin white powder coat. .084" thick frosted white acrylic diffuser with linear micro-prism pattern.

Electrical

Standard 120-277V driver includes 0-10V analog dimming. Power factor > .9. LD1 not Right Light as standard, consult factory. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Emergency

Emergency battery output—10 watts for 90 minutes. Maximum mounting height: 19.9ft Emergency Circuit with Connected Solutions (DLM1, LMFS1, LMFS1, NLT1, ENL1, CLM1, NXE1, WLXP) requires a UL924 compliant device, consult factory.

Labels

UL and cUL Listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment. Optional Anti-Microbial paint finish available.

Lumen Maintenance

Reported: L70 at > 60,000 hours Calculated: L70 at 150,000 hours
L80 at > 60,000 hours L80 at 94,000 hours

(Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5 year limited warranty.

PERFORMANCE CHART

Delivered Lumens	Tested System Watts	LPW	Lumen Multipliers		
			CCT	CRI	Multiplier
4000 Lumens	4000L	32	3000K	80	0.81
	4000LH	30			
4500 Lumens	4500L	37	3500K	80	1.00
	4500LH	34			
5000 Lumens	5000L	38	4000K	80	0.85
	5000LH	38			
5500 Lumens	5500L	42		90	0.98
	5500LH	41			
6000 Lumens	6000L	46			
	6000LH	44			
6500 Lumens	6500L	51			
	6500LH	49			
7000 Lumens	7000L	57			
	7000LH	55			
7500 Lumens	7500L	60			
	7500LH	58			
8000 Lumens	8000L	63			
	8000LH	63			

Based on 3500K, 80 CRI. *Lumen output may vary +/- 8%. Actual wattage may vary +/- 5%

Focal Point LLC reserves the right to change specifications for product improvement without notification.

ORDERING

Luminaire Series

Amica 2 FAM2

Nominal Size

1' x 4' 14

Shielding

Ribbed Acrylic Diffuser ACR

Lumen Output

Standard (2 LED Boards)

4000 Lumens 4000L
4500 Lumens 4500L
5000 Lumens 5000L
5500 Lumens 5500L
6000 Lumens 6000L
6500 Lumens 6500L
7000 Lumens 7000L
7500 Lumens 7500L

High Efficiency (4 LED Boards)

4000 Lumens 4000LH
4500 Lumens 4500LH
5000 Lumens 5000LH
5500 Lumens 5500LH
6000 Lumens 6000LH
6500 Lumens 6500LH
7000 Lumens 7000LH
7500 Lumens 7500LH
8000 Lumens 8000LH

Color Temperature

3000K, 80+ CRI or 90+ CRI 30K or 930K
3500K, 80+ CRI or 90+ CRI 35K or 935K
4000K, 80+ CRI or 90+ CRI 40K or 940K

Circuit

Single Circuit 1C

Voltage

120/277 UNV Volt UNV

347 Volt 347

(LD1, CLM1 only. Not available with EM.)

Low Voltage LV

Control System & Dimming Level

0-10V - 10% Dimming LD1

(Not Right Light as standard, consult factory)

0-10V - 1% Dimming L11

Low Voltage, PoE compatible LVN

(No driver. Not available with EM. LV Voltage only.)

Lutron Hi-Lume EcoSystem (LDE1) - LH1

1% Dimming (Not available with 7500L or 8000LH.)

DALI - 1% Dimming D11

Step Dimming SD5

Wattstopper DLM - 1% Dimming DLM1

Wattstopper Fixture Sensor LMFS1

Low Density - 1% Dimming LMFS1

Wattstopper Fixture Sensor LMFS1

High Density - 1% Dimming LMFS1

Acuity nLight* - 1% Dimming NLT1

(Not available with CP)

Enlighted Smart Sensor - 1% Dimming ENL1

Encelium CLM Connected Lighting Module CLM1

- 1% Dimming

Current NX Enabled - 1% Dimming NXE1

WaveLinX Pro - 1% Dimming WLXP

Mounting

Grid G

Drywall Frame Kit F

(Not available with DLM1, CLM1, NXE1 or NLT1)

(Cut out dimensions: Min: 12.25"/Max: 12.56"

Min: 48.25"/Max: 48.56")

Surface Mount SM

(Not available with DLM1, CLM1, NXE1 or NLT1)

24" Aircraft Cable C24

48" Aircraft Cable C48

96" Aircraft Cable C96

Factory Options

Air Return AR

(Overall height for luminaire with Air Return is 4.4")

Chicago Plenum CP

(Not available with flex whip)

Emergency Battery EM

with Integral Test Switch

6' New York City Flex Whip (120V) FNY1

6' New York City Flex Whip (277V) FNY2

6' Flex Whip FW

Finish

Matte Satin White WH

Matte Satin White Anti-Microbial WHA



Options in orange qualify for the Quickship program. 5-day up to 100 pieces, 10-day up to 300 pieces. Refer to Quickship Guide for complete details.

Focal Point provides flexibility in meeting the needs of each project by integrating with several building lighting control systems. A variety of sensors, drivers and other components can be specified that allow the luminaires to communicate with wired and wireless networks. All zoning can be digitally reconfigured through the application software. Daylight harvesting, occupancy sensing, integration with HVAC systems, and individual controls enable the monitoring and modulating of light levels and temperature in order to save energy, reduce costs and maximize occupants' comfort. All Connected Solutions luminaires require a compatible building control system.†

Connected Solution	Ordering Code	Model #**	Protocol	Compatible Networks*	Occupancy & Daylight	Temperature Reporting	Communication to Luminaire	Drivers	
 legrand WATTSTOPPER®		DLM1	LMFC-011	DLM	DLM	Enabled	No	Wired 	Advance by Signify, Optotronic by eldoLED
		LMFS1	LMFS-601 & LMFI-111	DLM Wireless	DLM	Enabled	No	Wireless	Advance by Signify Optotronic by eldoLED (Dexal)
	LMFSD	LMFS-601							
 COOPER Lighting Solutions		WLXP	OEM-WAA	WaveLinx Wireless	WaveLinx Pro Trellix	Enabled	No	Wireless (WaveLinx Pro Wireless Area Controller)	Advance by Signify
 CRESTRON		D11	Specified Driver	DALI	Crestron Züm Wireless & SpaceBuilder	Enabled	No	Wired	eldoLED ECOdrive
		L11		0-10V					Advance by Signify
 ENCELIUM		CLM1	ZBHA-CLM-DIM-ENC	ZigBee	Encelium X Light Management System	Enabled	No	Wireless	Optotronic by eldoLED Advance by Signify
 Enlighted		ENL1	SU-5E-IOT	Enlighted RF	Enlighted	Integrated	Yes	Wireless	Advance by Signify
 LUTRON		LH1	LDE1	EcoSystem	Quantum, Energi Savr Node, Energi TriPak	Enabled	No	Wired	Lutron Hi-Lume
 nLIGHT		NLT1	nEPS-60-IO	nLight	nLight	Enabled	No	Wired 	eldoLED ECOdrive, eldoLED SOLOdrive
								Wireless 	
 NX LIGHTING CONTROLS		NXE1	NXFM-LV	NX	NX Distributed Intelligence	Enabled	No	Wired 	Optotronic by eldoLED

*Not all compatible networks may be listed. **For performance data and additional control system details please visit the connected solutions manufacturer websites. Primary drivers are listed in **bold**. To specify a particular driver please consult factory. †Controls systems supplied by others.