



Luna® 1x4


LED

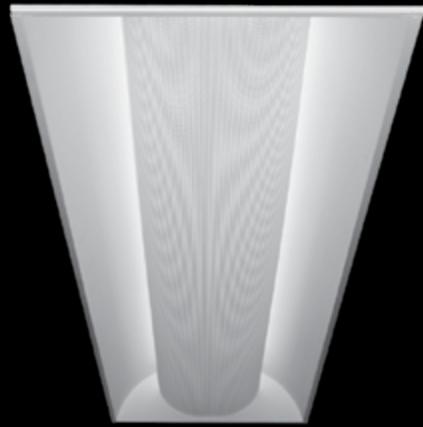

DIMENSIONAL DATA

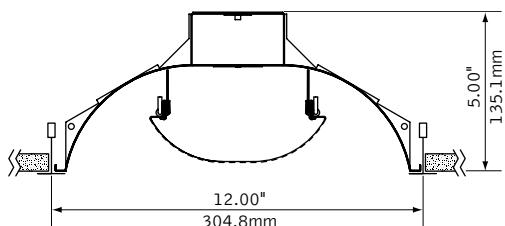

Overall height of ST luminaire is 5.50"

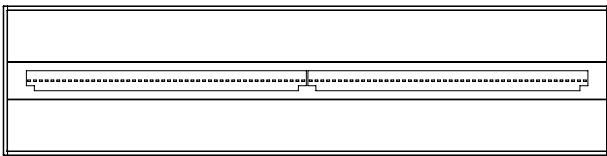

2 LED boards

FEATURES

Architectural recessed LED luminaire with perforated center basket.

Classic style updated with the latest technology.

Reflector and end caps form seamless one-piece housing.

High reflectance, low gloss Matte White finish controls glare.


Comparable output to fluorescent versions with reduced wattage.

Luna® LED provides high angle uniform distribution ideal for comfortable general illumination.

Connected Solutions: Integrates with wired and wireless building lighting control systems.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

PERFORMANCE



PRODUCT OVERVIEW

Lumen Output: 2500-3500lm

Wattage: 28-40W

LPW: 88-91


SDCM: 3

Delivered Lumens: 2500lm

Total System Watts: 28W

Photometric performance is measured in accordance with IESNA LM-79.
Visit focalpointlights.com for complete photometric data.

MOUNTING INFORMATION

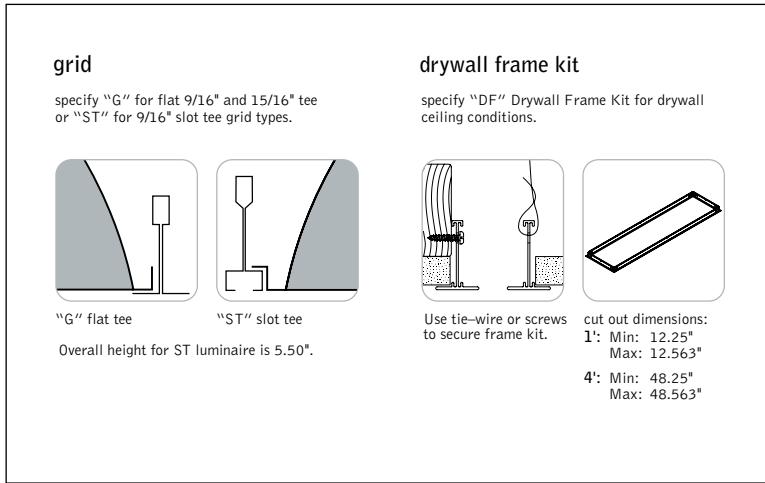

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80 or CRI>90. 3500K and 4000K with CRI>90 have a cyanosis observation index (COI) of 3.3 or less. 0-10V dimming driver standard. LED modules and drivers are replaceable.

Construction

One-piece 20 Ga. steel reflector and housing. 20 Ga. steel ends form finished housing. LEDs are shielded by detachable 22 Ga. steel perforated shield with acrylic lens insert. LED shield is secured by four spring-pins allowing shield to hinge down for maintenance. Top access 20 Ga. steel driver compartment. Weight: 16 lbs.

Optic

One-piece 20 Ga. steel reflectors finished in Matte Satin White powder coat.

Electrical

Standard 120-277V driver includes 0-10V analog dimming, dimming range 100% - 10% Power factor > .9. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Emergency

Emergency battery output—10 watts for 90 minutes. High Output emergency battery—20 watts for 90 minutes (UNV only.) Emergency Circuit with Connected Solutions (DLM1, LMFS1, LMFSD, NLT1, CLM1, NXE1, WLXP) requires a UL924 compliant device, consult factory.

Labels

UL and cUL Listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment. Optional Anti-Microbial paint finish available.

Lumen Maintenance

Reported: L90 > 61,000 hours

Calculated: L90 at > 114,000 hours

(Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Lifetime and warranty

LED System rated for operation in ambient environments up to 25°C. 5-year limited warranty.

PERFORMANCE CHART

Delivered Lumens	Tested System Watts	LPW
2500 Lumens	28	91
3000 Lumens	34	90
3500 Lumens	40	88

Based on 3500K, 80 CRI. Lumen multipliers:
Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

ORDERING

Luminaire Series	FLUL
Nominal Size	14
1' x 4'	
Shielding	PS
Perforated Shield	
Lumen Output	
2500 Lumens	2500L
3000 Lumens	3000L
3500 Lumens	3500L
Color Temperature	
2700K, 80+ CRI or 90+ CRI	27K or 927K
3000K, 80+ CRI or 90+ CRI	30K or 930K
3500K, 80+ CRI or 90+ CRI	35K or 935K
4000K, 80+ CRI or 90+ CRI	40K or 940K
Circuit	1C
Single Circuit	
Voltage	
UNV 120/277 Volt	UNV
Low Voltage	LV
Control System & Dimming Level	
0-10V - 10% Dimming (Not Right Light as standard, consult factory)	LD1
0-10V - 1% Dimming	L11
Low Voltage, PoE compatible (No driver. Not available with EM or EC. LV Voltage only)	LVN
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming	LH1
Wattstopper DLM - 1% Dimming (Not available with CP)	DLM1
Wattstopper Fixture Sensor Low Density - 1% Dimming	LMFS1
Wattstopper Fixture Sensor High Density - 1% Dimming	LMFSD
Acuity nLight - 1% Dimming (Not available with CP)	NLT1
Encelium CLM Connected Lighting Module - 1% Dimming	CLM1
Current NX Enabled - 1% Dimming (Not available with CP)	NXE1
WaveLinx Pro - 1% Dimming	WLXP
Mounting	
Drywall Frame Kit (Not available with CLM1, DLM1, NXE1 or NLT1) (Cut out dimensions: Min: 12.25" Max: 12.563" Min: 48.25" Max: 48.563")	F
Grid	G
Slot Tee	ST
Factory Options	
Air Return (Adds 0.875" to overall height.)	AR
Chicago Plenum (Not available with flex whip)	CP
Emergency Battery (Adds 3.25" to overall height.)	EM
High Output Emergency Battery (Adds 3.25" to overall height. UNV only)	B20
Positional Clip	EQ
6' New York City Flex Whip (120V)	FNY1
6' New York City Flex Whip (277V)	FNY2
6' Flex Whip	FW
Finish	
Matte Satin White	WH
Matte Satin White Anti-Microbial	WHA



Luna® 1x4

LED

Focal Point provides flexibility in meeting the needs of each project by integrating with several building lighting control systems. A variety of sensors, drivers and other components can be specified that allow the luminaires to communicate with wired and wireless networks. All zoning can be digitally reconfigured through the application software. Daylight harvesting, occupancy sensing, integration with HVAC systems, and individual controls enable the monitoring and modulating of light levels and temperature in order to save energy, reduce costs and maximize occupants' comfort. All Connected Solutions luminaires require a compatible building control system.[†]

Connected Solution	Ordering Code	Model #*	Protocol	Compatible Networks*	Occupancy & Daylight	Temperature Reporting	Communication to Luminaire	Drivers	
 WATTSTOPPER®	DLM1	LMFC-011	DLM	DLM	Enabled ¹	No	Wired	Advance by Signify, Optotronic by eldoLED	
	LMFS1	LMFS-601 & LMFI-111	DLM Wireless	DLM	Integrated ²	No	Wireless		
	LMFSD	LMFS-601							
	WLXP	OEM-WAA	WaveLinx Wireless	WaveLinx Pro Trellix	Integrated ²	No	Wireless (WaveLinx Pro Wireless Area Controller)	Advance by Signify	
	L11	Specified Driver	0-10V	Crestron Züm Wireless & SpaceBuilder	Enabled ¹	No	Wired	Advance by Signify	
	CLM1	ZBHA-CLM-DIM-ENC	ZigBee	Encelium X Light Management System	Enabled ¹	No	Wireless	Optotronic by eldoLED Advance by Signify	
	LH1	LDE1	EcoSystem	Quantum, Energi Savr Node, Energi TriPak	Enabled ¹	No	Wired	Lutron Hi-Lume	
	NLT1	nEPS-60-IO	nLight	nLight	Enabled ¹	No	Wired	eldoLED ECODrive, eldoLED SOLOdrive	
	NXE1	NXFM-LV	NX	NX Distributed Intelligence	Enabled ¹	No	Wired		

*Not all compatible networks may be listed. **For performance data and additional control system details please visit the connected solutions manufacturer websites. Primary drivers are listed in **bold**. To specify a particular driver please consult factory.

[†]Controls systems supplied by others. ¹Enabled: Fixture supplied with a Node/ Controller. Sensor to be provided by others. ²Integrated: Fixture supplied with an installed Sensor.