


Seem® 1


LED DIRECT/INDIRECT WALL MOUNT



Pop-Down Lens

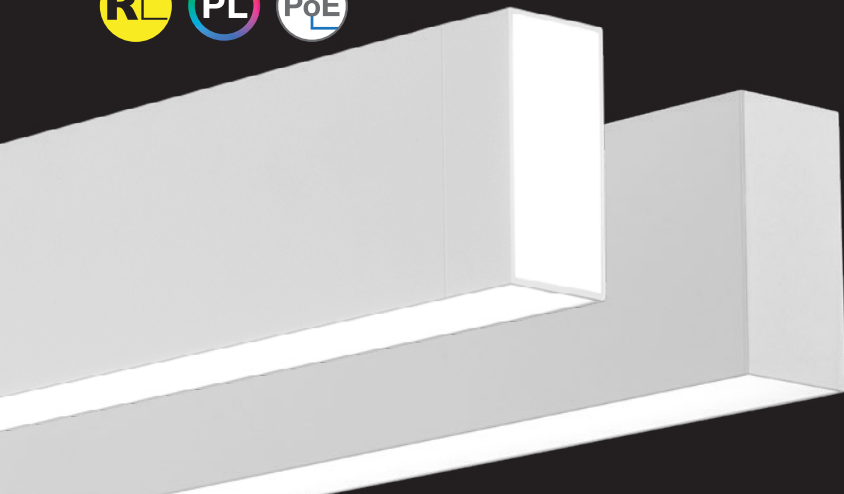


Corner detail



lit end cap detail

DIMENSIONAL DATA

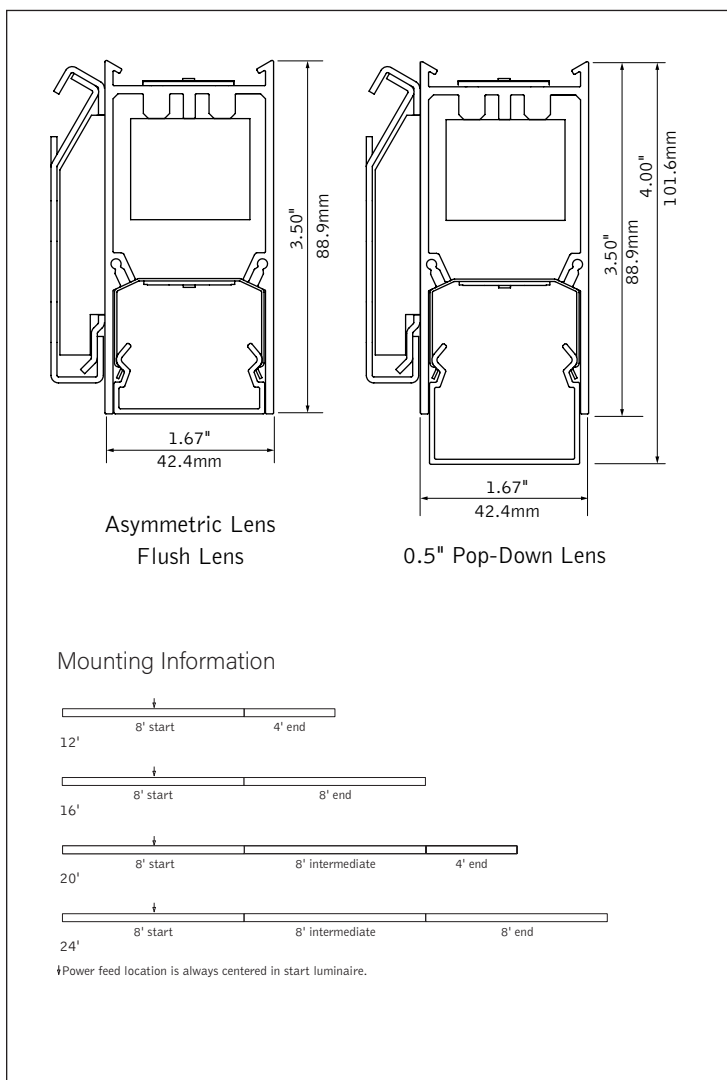

FEATURES

Narrow extruded aluminum 1.5" linear direct/indirect wall mount LED with multiple shielding options.

Individual units and continuous runs in 1" increments.

Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.


LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.

Choice of output levels to meet a wide variety of application needs.

Preferred Light: Lighting for better color rendition and human preference.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.


DISTRIBUTIONS

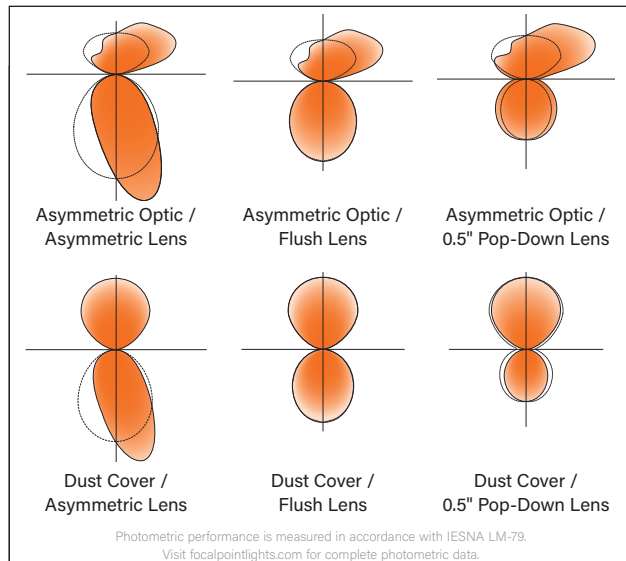

fixture:

project:

DETAILS

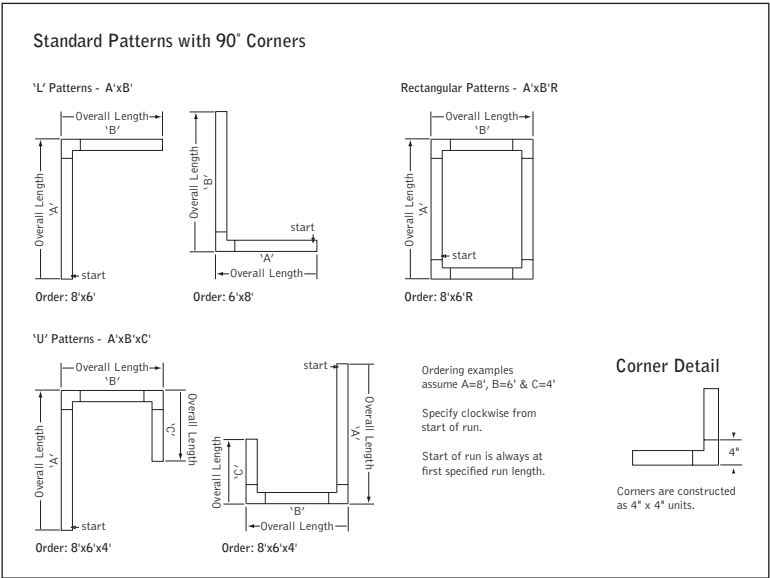

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 3000K, 3500K or 4000K with both 80 and 90 CRI options. 3500K and 4000K with CRI>90 have a cyanosis observation index (COI) of 3.3 or less. LED modules and drivers are replaceable from below. Color accuracy <3 SDCM.

Construction

One piece extruded aluminum housing. Cast aluminum end caps. 8' unit weight: 15lbs.

Optic

Reflectors fabricated of 22 Ga. steel finished in High Reflectance White powder coat. Extruded acrylic lens .07" thick with frosted finish, up to 8' continuous.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Power factor > .9. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires. PoE runs require an independent PoE node and power feed for each luminaire section.

Emergency Battery

Emergency output - 10 watts for 90 minutes.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.

Lumen Maintenance

Reported: L70 at >61,000 hours Calculated: L70 at 470,000 hours
L90 at >61,000 hours L90 at 115,000 hours
Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.







PERFORMANCE CHARTS

See pages 3 & 4.

ORDERING


Luminaire Series	FSM1BW
Seem 1 LED	FSM1BW
Shielding	
Asymmetric Optic top/Asymmetric Lens bottom	ASAS
Asymmetric Optic top/Flush Lens bottom	ASFL
Asymmetric Optic top/0.5" Pop-Down Lens bottom	ASPD05
Dust Cover top/Asymmetric Lens bottom	DCAS
Dust Cover top/Flush Lens bottom	DCFL
Dust Cover top/Pop-Down Lens bottom	DCPD05
Direct Distribution	
125 Lumens per foot (Consult factory for Lutron and DALI)	125DN
250 Lumens per foot	250DN
375 Lumens per foot	375DN
500 Lumens per foot	500DN
625 Lumens per foot	625DN
Indirect Distribution	
125 Lumens per foot (Consult factory for Lutron and DALI)	125UP
250 Lumens per foot	250UP
375 Lumens per foot	375UP
500 Lumens per foot	500UP
625 Lumens per foot	625UP
800 Lumens per foot*	800UP
1000 Lumens per foot* (*Not available with DALI)	1000UP
Color Temperature	
3000K, 80CRI or 90 CRI	30K or 930K
3500K, 80CRI or 90 CRI	35K or 935K
4000K, 80CRI or 90 CRI	40K or 940K
3500K, Preferred Light	P35K
Circuits & Zones	
1 Circuit, non-emergency	1C
2 non-emergency circuits provide independent control of Direct and Indirect sources	2C
Consult Ordering Guide on page 5 for multiple circuiting and zoning options	_C_Z_DL
Voltage	
120/277 UNV Volt	UNV
347 Volt (LD1 driver only)	347
Low Voltage	LV
Control System & Dimming Level	
0-10V - 10% Dimming	LD1
0-10V - 1% Dimming	L11
Low Voltage, PoE compatible (No driver. Not available with EM or EC. LV Voltage only.)	LVN
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming	LH1
Lutron 5-Series EcoSystem (LDE5) - 5% Dimming	LU5
DALI 1% Dimming (625 lumens per foot max)	D11
Mounting	WM
Wall Mount	WM
Factory Options (See Ordering Guide on page 5 for ordering details for DC, EC, EM & ECD.)	
Lit End Caps (Pair, adds 2" to overall luminaire length. ASFL & DCFL shielding only. Not available with P35K.)	LE
Daylight Circuit	_DC
Emergency Circuit	_EC
Emergency Battery Pack [†]	_EM
Emergency Control Device [†] [†] (5' minimum length. 120/277 Volt only.)	_ECD
Finish	
Black	BK
Titanium Silver	TS
Matte White Housing	WH
Luminaire Length Specify luminaire/row length in 1" increments (4" minimum. Leave blank for patterns. Smaller increments available, consult factory.)	_ft_in
Pattern Options (4" minimum length)	
'L' pattern	A' x B'
'U' pattern	A' x B' x C'
Rectangular pattern (Consult factory for other pattern options)	A' x B' R

4' PERFORMANCE CHART

					Lumens Per Watt (LPW)					
Direct Distribution	Indirect Distribution	Distribution % (Direct/ Indirect)	Total Delivered Lumens	Tested System Watts	 ASAS	 ASFL	 ASPD05	 DCAS	 DCFL	 DCPD05
125DN	125UP	50/50	1000	12	87	84	84	87	84	84
	250UP	33/67	1500	16	103	100	101	101	98	99
	375UP	25/75	2000	19	111	109	109	109	107	107
	500UP	20/80	2500	22	118	116	117	116	114	114
	625UP	17/83	3000	26	122	120	121	120	118	118
	800UP	14/86	3700	33	122	120	121	119	118	118
	1000UP	11/89	4500	39	123	122	122	120	119	120
250DN	125UP	67/33	1500	16	101	96	97	101	97	97
	250UP	50/50	2000	19	111	108	108	110	106	107
	375UP	40/60	2500	23	116	113	114	115	112	112
	500UP	33/67	3000	26	122	119	120	120	117	118
	625UP	29/71	3500	30	125	122	123	123	120	121
	800UP	24/76	4200	36	124	122	122	122	120	120
	1000UP	20/80	5000	43	125	123	124	123	121	121
375DN	125UP	75/25	2000	20	105	101	101	106	101	102
	250UP	60/40	2500	24	113	109	110	112	108	109
	375UP	50/50	3000	27	117	114	114	116	112	113
	500UP	43/57	3500	30	122	119	119	120	117	118
	625UP	38/62	4000	34	124	122	122	123	120	120
	800UP	32/68	4700	41	124	122	122	122	120	120
	1000UP	25/75	5500	47	125	123	123	123	121	121
500DN	125UP	80/20	2500	25	109	103	104	110	103	104
	250UP	67/33	3000	28	116	110	110	115	109	109
	375UP	57/43	3500	32	119	114	114	118	112	113
	500UP	50/50	4000	35	123	118	119	121	117	117
	625UP	44/56	4500	39	125	121	121	123	119	120
	800UP	38/62	5200	45	124	121	121	123	119	119
	1000UP	33/67	6000	51	125	122	122	123	120	120
625DN	125UP	83/17	3000	30	107	101	99	107	101	99
	250UP	71/29	3500	33	112	107	105	112	106	104
	375UP	60/40	4000	37	116	111	109	114	110	108
	500UP	56/44	4500	40	119	115	113	118	114	112
	625UP	50/50	5000	44	121	117	116	120	116	115
	800UP	44/56	5700	50	121	118	117	120	116	115
	1000UP	35/65	6500	57	122	119	118	121	117	116


*Based on 3500K, 4' lengths. Lumen Multipliers: Preferred Light = 0.65, 90 CRI = 0.87, Delivered lumens may vary +/- 5%. Actual wattage may vary +/- 5%.

LIT END CAP PERFORMANCE CHART

Direct Distribution	Delivered Lumens Per End Cap	Tested System Watts Per End Cap	Lumens Per Watt (LPW)
			
125LF	55	0.6	91
250LF	115	1.0	110
375LF	172	1.5	116
500LF	229	1.9	119
625LF	291	2.5	116

Based on 3500K. Lumen multipliers: 90 CRI = 0.87. Delivered lumens may vary +/- 5%. Actual wattage may vary +/- 5%
Tested System Watts is not incremental, but the portion of overall wattage consumed by the Lit End Cap module

ASYMMETRIC OPTIC / ASYMMETRIC LENS
Standard Application Example

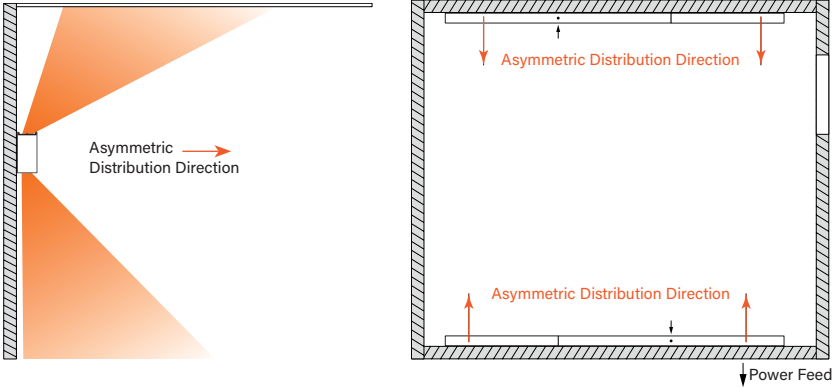

Ordering Guide

Linear Circuitry, Zones & Factory Options



HOW TO USE THIS GUIDE

Fill out the worksheet on the following page to specify your requirements for circuitry, zones, and factory options.


Refer to the run chart for standard run configurations, consult factory for custom configurations.

Complete the Totals / Ordering Codes at the bottom of the worksheet and add to your ordering logic on the cut sheet.

Submit the worksheet along with your order.

EXAMPLE	TOTAL RUN LENGTH: 24ft		JOB NAME:			FIXTURE TYPE:				
	HOUSING SECTION	SECTION LENGTH	LIGHT DISTRIBUTION	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			
							SEPARATE ELECTRICAL FEEDS			EM
	SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	ECD				
	1	8	Indirect	1C	1Z					
			Direct				1EC			
2	8	Indirect	1C	1Z						
		Direct	2C	2Z						
3	8	Indirect	1C	1Z						
		Direct	2C		1DL					
Totals / Ordering Codes				2C	2Z	1DL		1EC		

ORDERING: FSM4BS-FL-625UP-125DN-35K- 2C2Z1DL -UNV-LD1-C24- 1EC -WH-24ft

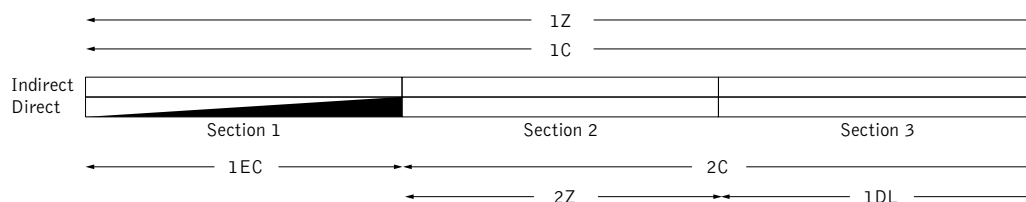

KEY

C = Switching Circuit

Switched Hot / Shared Neutral

Z = Dimming Zone

Dimming Control Wires

DL = Daylight Zone

Daylight Dimming Control Wires

DC = Daylight Circuit

Switched Hot / Separate Neutral

EC = Emergency Circuit

Switched Hot / Separate Neutral

ECD = Emergency Control Device

Unswitched Hot / Separate Neutral

EM = Emergency Battery

Unswitched Hot / Shared Neutral

DEFAULTS

- Zones and Factory Options illuminate entire sections from 4' to 8' in length.
- EC, EM, and ECD only available for direct distribution.
- One shared or isolated circuit and zone required per housing section.
- Additional electrical feed required for applications greater than three shared circuits and zones.
- Limit of one EM or ECD per housing section.
- Each EC, DC and ECD require an additional electrical feed.
- ECD not available in the same housing section as EC.
- Longer lead times and additional pricing may apply for custom run configurations.

CUSTOM LENGTHS

- If partial illumination of emergency or daylight section is required, indicate in ordering guide and add "partial illumination" in Order Notes. Drawing required.
- Engineering validation required, longer lead times may apply.

Ordering Guide Worksheet

Linear Circuitry, Zones & Factory Options



FOCAL POINT®

TOTAL RUN LENGTH: _____			JOB NAME: _____			FIXTURE TYPE: _____			
HOUSING SECTION	SECTION LENGTH	LIGHT DISTRIBUTION	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			
			SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	SEPARATE ELECTRICAL FEEDS			EM
						DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	ECD	
1		Indirect							
		Direct							
2		Indirect							
		Direct							
3		Indirect							
		Direct							
4		Indirect							
		Direct							
5		Indirect							
		Direct							
6		Indirect							
		Direct							
7		Indirect							
		Direct							
8		Indirect							
		Direct							
9		Indirect							
		Direct							
10		Indirect							
		Direct							
11		Indirect							
		Direct							
12		Indirect							
		Direct							
Totals / Ordering Codes									

Combine to create Circuits & Zones ordering code

Enter as individual Factory Options

RUN CHART

Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths
9	5 + 4	21	8 + 8 + 5	33	8 + 8 + 8 + 5 + 4	45	8 + 8 + 8 + 8 + 8 + 5
10	6 + 4	22	8 + 8 + 6	34	8 + 8 + 8 + 6 + 4	46	8 + 8 + 8 + 8 + 8 + 6
11	7 + 4	23	8 + 8 + 7	35	8 + 8 + 8 + 7 + 4	47	8 + 8 + 8 + 8 + 8 + 7
12	8 + 4	24	8 + 8 + 8	36	8 + 8 + 8 + 8 + 4	48	8 + 8 + 8 + 8 + 8 + 8
13	8 + 5	25	8 + 8 + 5 + 4	37	8 + 8 + 8 + 8 + 5		
14	8 + 6	26	8 + 8 + 6 + 4	38	8 + 8 + 8 + 8 + 6		
15	8 + 7	27	8 + 8 + 7 + 4	39	8 + 8 + 8 + 8 + 7		
16	8 + 8	28	8 + 8 + 8 + 4	40	8 + 8 + 8 + 8 + 8		
17	8 + 5 + 4	29	8 + 8 + 8 + 5	41	8 + 8 + 8 + 8 + 5 + 4		
18	8 + 6 + 4	30	8 + 8 + 8 + 6	42	8 + 8 + 8 + 8 + 6 + 4		
19	8 + 7 + 4	31	8 + 8 + 8 + 7	43	8 + 8 + 8 + 8 + 7 + 4		
20	8 + 8 + 4	32	8 + 8 + 8 + 8	44	8 + 8 + 8 + 8 + 8 + 4		

Standard run configurations, consult factory for custom configurations.