

Seem® 1

LED RECESSED




flush lens




pop-down lens



wall to ceiling
companion




suspended
companion



wall mount
companion

DIMENSIONAL DATA

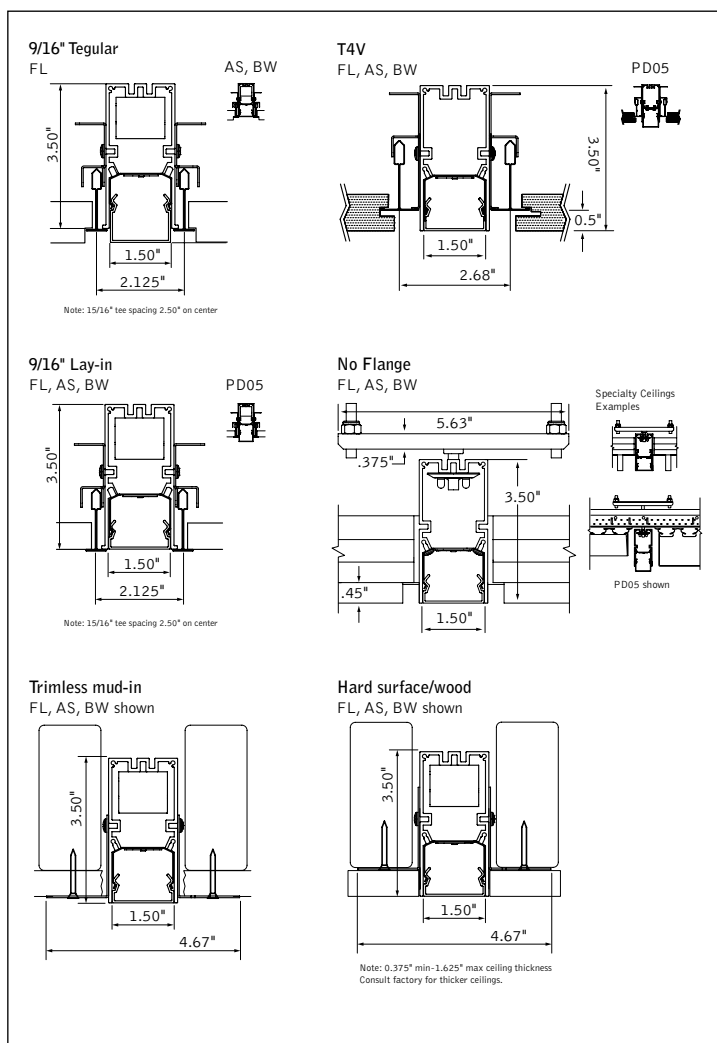

FEATURES

Narrow extruded aluminum 1.5" recessed linear slot LED with Asymmetric, Batwing and Pop-Down lens options.

Individual units and continuous runs in 1" increments.


Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.

LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.

Choice of output levels to meet a wide variety of application needs.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.


DISTRIBUTIONS

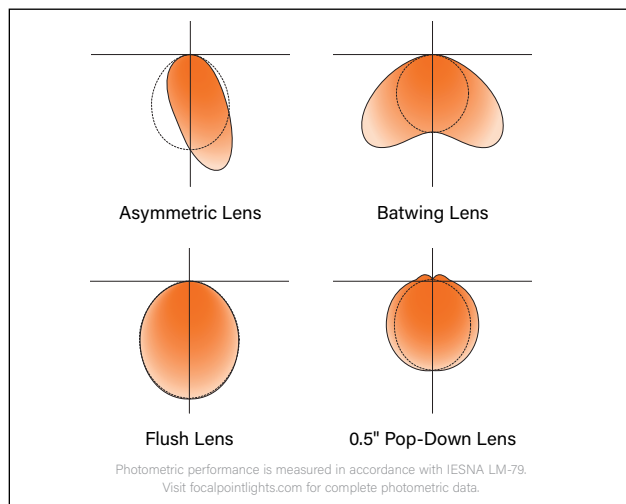

fixture:

project:

DETAILS

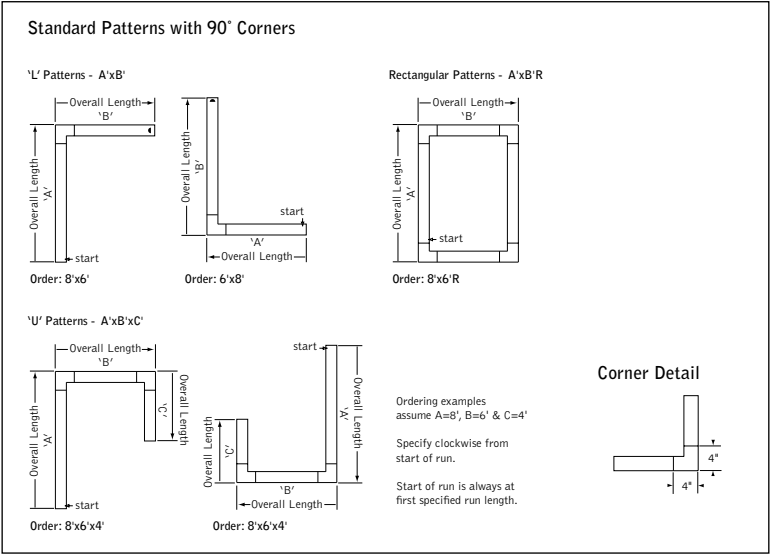

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 3000K, 3500K or 4000K with both 80 and 90 CRI options. 3500K and 4000K with CRI>90 have a cyanosis observation index (COI) of 3.3 or less. LED modules and drivers are replaceable from below. Color accuracy <3 SDCM.

Construction

One piece extruded aluminum housing. 20 Ga. steel end caps. Housing for new construction applications. XFW acceptable for use with wood, consult factory for Type IC availability. 8' unit weight: 15lbs.

Optic

Reflectors fabricated of 22 Ga. steel finished in High Reflectance White powder coat. Extruded acrylic lens .07" thick with frosted finish, up to 8' continuous. 15-30" recommended distance from wall for Asymmetric Lens (AS).

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Power factor > .9. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires. PoE runs require an independent PoE node and power feed for each luminaire section.

Emergency Battery

Emergency output - 10 watts for 90 minutes.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.

Lumen Maintenance

Reported: L70 at >61,000 hours Calculated: L70 at 470,000 hours
L90 at >61,000 hours L90 at 115,000 hours

Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

4' PERFORMANCE CHART

See page 3.

ORDERING

Luminaire Series

Seem 1 LED FSM1

Shielding

Asymmetric Lens AS
Batwing Lens BW
Flush Lens FL
0.5" Pop-Down Lens PD05
(Not available with T1, T2, T4, T5
regular ceiling configurations.)

Lumen Output

125 Lumens per foot 125LF
(4' minimum length.
Consult factory for Lutron, DALI)
250 Lumens per foot 250LF
(3' minimum length)
375 Lumens per foot 375LF
500 Lumens per foot 500LF
625 Lumens per foot 625LF

Color Temperature

3000K, 80+ CRI or 90+ CRI 30K or 930K
3500K, 80+ CRI or 90+ CRI 35K or 935K
4000K, 80+ CRI or 90+ CRI 40K or 940K

Circuits & Zones

1 Circuit, non-emergency 1C
Consult Ordering Guide on page 4 for
multiple circuiting and zoning options

Voltage

120/277 UNV Volt UNV
347 Volt 347
(LD1 driver only)
Low Voltage LV

Control System & Dimming Level

0-10V - 10% Dimming LD1
0-10V - 1% Dimming L11
Low Voltage, PoE compatible LVN
(No driver. Not available with EM or EC. LV Voltage only.)
Lutron Hi-Lume EcoSystem (LDE1) -
1% Dimming LH1
DALI 1% Dimming D11

Ceiling Configuration

Std. 15/16" Lay-in or Std. 15/16" Regular G1 or T1
Std. 9/16" Lay-in or Std. 9/16" Regular G2 or T2
9/16" Slot-tee Regular G3
Tall 15/16" Lay-in or Tall 15/16" Regular G4 or T4
Tall 15/16" Regular for specialty ceilings T4V
(0.5" drop)
Tall 9/16" Lay-in or Tall 9/16" Regular G5 or T5
Node 9/16" Regular T6
No Flange for specialty ceilings NF
(Ex. slat, panel, cloud systems.)
Mud-in Trimless XFF
Non-Drywall Hard Surface XFN
Hard Surface, Wood XFW

Factory Options

(See Ordering Guide on page 4 for
ordering details for DC, EC, EM & ECD.)

Chicago Plenum CP
Daylight Circuit _DC
Emergency Circuit _EC
Emergency Battery Pack† _EM
Emergency Control Device† _ECD
†(4' minimum length, 120/277 Volt only.)

6' New York City Flex Whip (120V) FNY1
6' New York City Flex Whip (277V) FNY2
6' Flex Whip FW

Finish

Matte White Housing WH

Luminaire Length

Specify luminaire/row length _ft _in
in 1" increments





(2' minimum, lengths are nominal 1" increments based
on T-centers. Housing length is 1" shorter than specified.
Leave blank for patterns. Smaller increments available,
consult factory.)

Pattern Options

'L' pattern A' x B'
'U' pattern A' x B' x C'
Rectangular pattern A' x B' R
(Consult factory for other pattern options)


QS 10 DAY Options in orange qualify for the Quickship program. 1000' total, 48" maximum
per pattern section. Refer to Quickship Guide for complete details including
EM/EC options.

4' PERFORMANCE CHART

			Lumens Per Watt (LPW)			
Lumen Output	Delivered Lumens	Tested System Watts				
			AS	BW	FL	PD05
125LF	500	6	82	81	75	76
250LF	1000	10	105	98	98	99
375LF	1500	15	110	103	104	105
500LF	2000	19	114	106	106	107
625LF	2500	24	110	103	103	100

Based on 3500K, 4' length. Lumen multipliers: Preferred Light = 0.65, 90 CRI = 0.87.
Delivered lumens may vary +/- 5%. Actual wattage may vary +/- 5%

DIRECT ASYMMETRIC
Standard Application Example

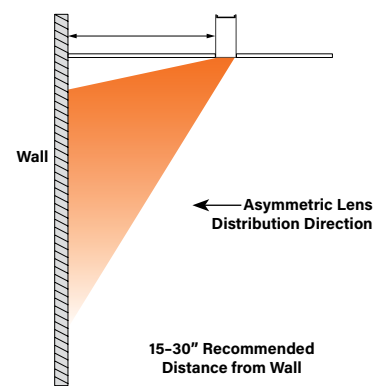

Ordering Guide

Direct Only Linear Circuitry, Zones & Factory Options



HOW TO USE THIS GUIDE

Fill out the worksheet on the following page to specify your requirements for circuitry, zones, and factory options.


Refer to the run chart for standard run configurations, consult factory for custom configurations.

Complete the Totals / Ordering Codes at the bottom of the worksheet and add to your ordering logic on the cut sheet.

Submit the worksheet along with your order.

EXAMPLE	TOTAL RUN LENGTH: 32ft		JOB NAME:			FIXTURE TYPE:			
	HOUSING SECTION	SECTION LENGTH	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			
						SEPARATE ELECTRICAL FEEDS			EM
			SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	ECD	
	1	8	1C	1Z					1EM
	2	8	2C	2Z					
	3	8	2C	2Z					
	4	8				1DC			
	Totals / Ordering Codes		2C	2Z		1DC			1EM

ORDERING: FSM4L-FL-625LF-35K- 2C2Z -UNV-LD1-G2- 1DC-1EM -WH-32ft

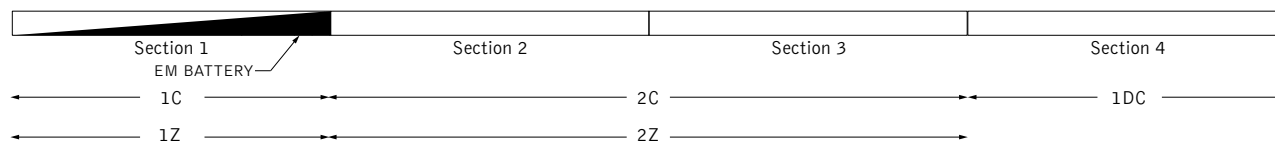

KEY

C = Switching Circuit
Switched Hot / Shared Neutral

Z = Dimming Zone
Dimming Control Wires

DL = Daylight Zone
Daylight Dimming Control Wires

DC = Daylight Circuit
Switched Hot / Separate Neutral

EC = Emergency Circuit
Switched Hot / Separate Neutral

EM = Emergency Battery
Unswitched Hot / Shared Neutral

ECD = Emergency Control Device
Unswitched Hot / Separate Neutral

DEFAULTS

- Zones and Factory Options illuminate entire sections from 4' to 8' in length.
- One shared or isolated circuit and zone required per housing section.
- Limit of one EM or ECD per housing section.
- Additional electrical feed required for applications greater than three shared circuits and zones.
- Each DC, EC and ECD require an additional electrical feed.
- ECD not available in the same housing section as EC.
- Longer lead times and additional pricing may apply for custom run configurations.

CUSTOM LENGTHS

- If partial illumination of emergency or daylight section is required, indicate in ordering guide and add "partial illumination" in Order Notes. Drawing required.
- Engineering validation required, longer lead times may apply.

Ordering Guide Worksheet

Linear Circuitry, Zones & Factory Options



TOTAL RUN LENGTH: _____		JOB NAME: _____			FIXTURE TYPE: _____			
HOUSING SECTION	SECTION LENGTH	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			
		SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	SEPARATE ELECTRICAL FEEDS			EM
						DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
Totals / Ordering Codes								

Combine to create Circuits & Zones ordering code

Enter as individual Factory Options

RUN CHART

Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths
9	5 + 4	21	8 + 8 + 5	33	8 + 8 + 8 + 5 + 4	45	8 + 8 + 8 + 8 + 8 + 5
10	6 + 4	22	8 + 8 + 6	34	8 + 8 + 8 + 6 + 4	46	8 + 8 + 8 + 8 + 8 + 6
11	7 + 4	23	8 + 8 + 7	35	8 + 8 + 8 + 7 + 4	47	8 + 8 + 8 + 8 + 8 + 7
12	8 + 4	24	8 + 8 + 8	36	8 + 8 + 8 + 8 + 4	48	8 + 8 + 8 + 8 + 8 + 8
13	8 + 5	25	8 + 8 + 5 + 4	37	8 + 8 + 8 + 8 + 5		
14	8 + 6	26	8 + 8 + 6 + 4	38	8 + 8 + 8 + 8 + 6		
15	8 + 7	27	8 + 8 + 7 + 4	39	8 + 8 + 8 + 8 + 7		
16	8 + 8	28	8 + 8 + 8 + 4	40	8 + 8 + 8 + 8 + 8		
17	8 + 5 + 4	29	8 + 8 + 8 + 5	41	8 + 8 + 8 + 8 + 5 + 4		
18	8 + 6 + 4	30	8 + 8 + 8 + 6	42	8 + 8 + 8 + 8 + 6 + 4		
19	8 + 7 + 4	31	8 + 8 + 8 + 7	43	8 + 8 + 8 + 8 + 7 + 4		
20	8 + 8 + 4	32	8 + 8 + 8 + 8	44	8 + 8 + 8 + 8 + 8 + 4		

Standard run configurations, consult factory for custom configurations.